

Code: DS-2CE16H0T-IT3ZE(2.7-13.5MM)

HD-TVI CAMERA **DS-2CE16H0T-IT3ZE(2.7-13.5MM)** - 5 Mpx PoC.at Hikvision

Net: **149.76 EUR** Gross: **149.76 EUR**

Megapixel camera with Progressive Scan CMOS sensor and HD-TVI (High Definition Transport Video Interface).

The HD-TVI interface allows to transmission of analog video signal via coaxial cable at resolutions up to max. 8.3 Mpx (4K UHD). During transmission there are no delays and is maintained the original, high quality image.

The used motozoom lens with 2.7 ... 13.5 mm focal length allows to remote view angle adjustment. The 3-Axis integrated camera bracket has a regulation in all three planes, which allows to turn the camera to any direction.

The ability to power the camera via a coaxial cable according to the innovative PoC (Power over Coaxial) standard allows to eliminate the need for additional wiring to the unit. Camera is according to IP67 Index of Protection norm.



SPECIFICATION

Standard:	HD-TVI
Sensor:	Progressive Scan CMOS
Matrix size:	5 Mpx
Resolution:	2560 x 1944 - 5 Mpx @ 20 fps 2560 x 1440 - 4 Mpx @ 25 fps 1920 x 1080 - 1080p @ 25 fps
Range of IR illumination:	40 m
IR illuminator power adjustment:	Automatic
Lens:	2.7 ... 13.5 mm - Motozoom The camera does not have auto-focus function
View angle:	96 ° ... 29 °
Video output:	1 Vpp / 75 Ω - BNC socket
Main features:	• Motozoom lens - The ability to control via coaxial cable from recorder HIKVISION • D-WDR - Wide Dynamic Range • EXIR - high-efficiency infrared LEDs technology, which evenly covers the whole plan of both central vantage points of the scene as well as the corners • 2D-DNR - Digital Noise Reduction • ICR - Movable InfraRed filter • BLC - Back Light Compensation • IR illuminator optimization • Mirror - Mirror image • AGC - Automatic Gain Control • Auto White Balance • Sharpness - sharper image outlines
OSD menu:	OSD menu available via recorder

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Power supply:	PoC.at , 12 V DC / 650 mA
Power consumption:	≤ 7.8 W
Housing:	Compact, Metal / Plastic
Color:	White / Black
"Index of Protection":	IP67
Operation temp:	-40 °C ... 60 °C
Weight:	0.69 kg
Dimensions:	255 x 85 x 92 mm
Supported languages:	English
Manufacturer / Brand:	Hikvision
SAP Code:	300510003
Country of origin:	China
Guarantee:	3 years

PRESENTATION




Side view:



Mounting side view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

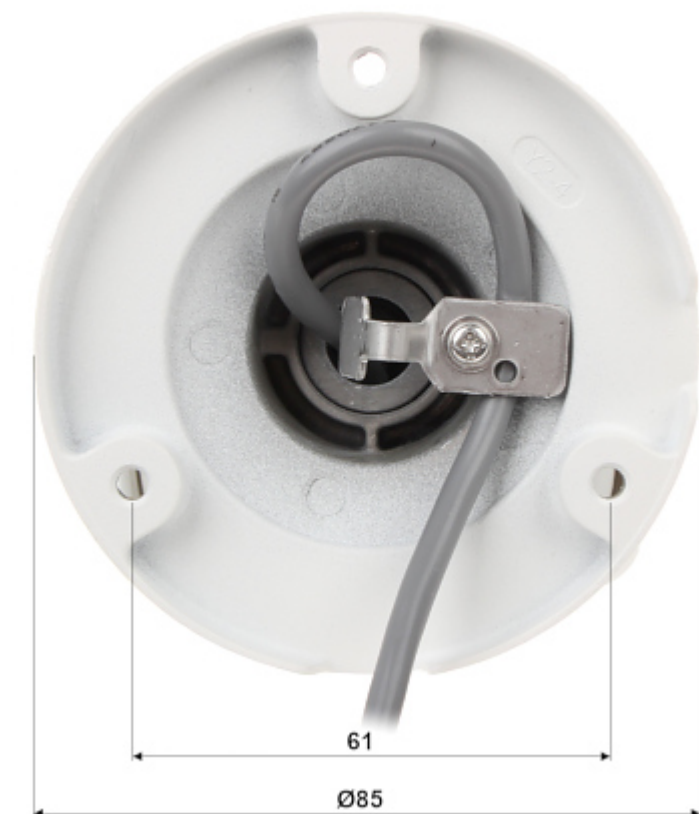


In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):

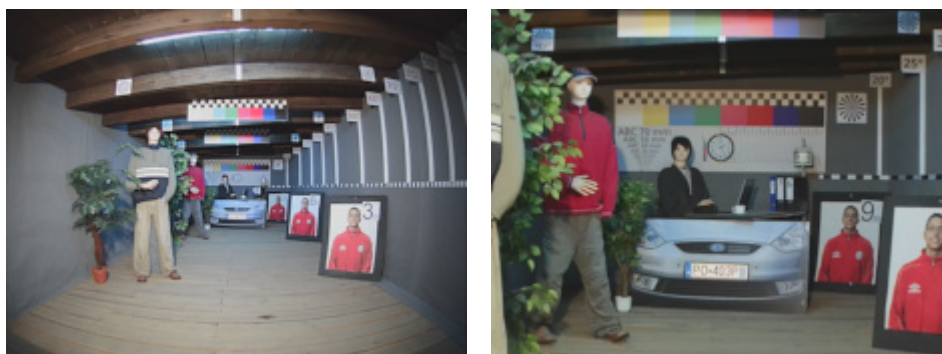

Camera image at night conditions with internal built-in IR illuminator on:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------