

Code: AQUA-RING-S

CEILING PIR DETECTOR **AQUA-RING-S** SATEL

Net: **24.43 EUR** Gross: **24.43 EUR**

Digital Passive Infra Red detector to ceiling mount.



SPECIFICATION

Application:	Indoor
Pyroelectric sensor:	Double
Sensor type:	Passive Infra Red (PIR)
Range:	from a height 2.4 m area 36 m ² from a height 3.7 m area 80 m ²
Sensitivity adjustment:	By jumpers
Recommended installation height:	2.2 m ... 4.5 m
Autodiagnostics:	Basic
Prealarm feature:	✓
Pet immunity:	—
Alarm time:	2 s
Digital temperature compensation:	✓
Main features:	<ul style="list-style-type: none">• Environmental immunity• Tamper protections• Power supply 24V AC/DC
Power supply:	<ul style="list-style-type: none">• 24 V AC / 27 mA,• 24 V DC / 14 mA
Operation temp:	-30 °C ... 55 °C
Target speed range:	0.3 ... 3 m/s
Weight:	0.053 kg

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions:	Ø 97 x 29 mm
Manufacturer / Brand:	SATEL
Guarantee:	2 years

PRESENTATION

Front view:




Internal view:



View of the ceiling mounting side:



Description of particular elements of the device:

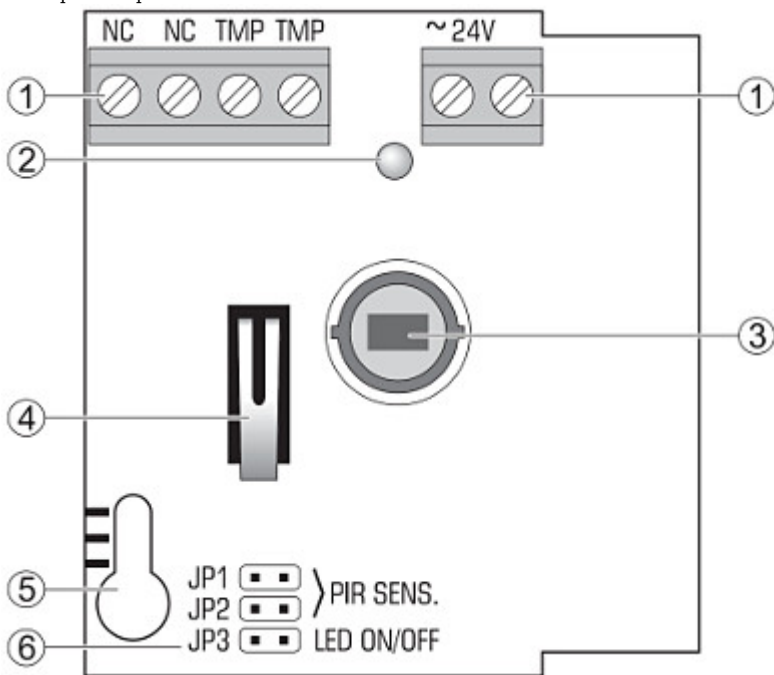

1. cable terminals
 2. LED indicator
 3. pyroelectric sensor
 4. tamper contact
 5. fixing screw hole
 6. configuration jumpers
- In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

