

Code: ASC1204C-S

ACCESS CONTROLLER **ASC1204C-S** DAHUA

Net: **876.06 AUD** Gross: **876.06 AUD**



The ASC1204C-S controller is intended to use in access control systems based on electrical control of door opening.

SPECIFICATION



Number of served transitions:	4 (one-way)
Support:	DAHUA
Number of supported readers:	4 pcs
Battery backup support:	max. 7 Ah
Input lines:	9
Output lines:	5 pcs (4 pcs Relay)
Communication:	<ul style="list-style-type: none">• RS-485,• Ethernet,• Wiegand
Power supply:	9 ... 15 V / 500 mA DC
Main features:	<ul style="list-style-type: none">• 100000 indexed users• History of 150000 events• Remote programming from PC• Function to prevent of multiple use of the same code/card to gain access (anti-passback)• Door Left Open and Door Forced Open alarms• Tamper detection - opening the enclosure• Metal housing
Default IP address:	192.168.0.2
Default admin user / password:	admin / 123456
Operation temp:	-30 °C ... 60 °C
Permissible relative humidity:	max. 95 % (non-condensing)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Weight:	2.326 kg
Dimensions:	320 x 280 x 114 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years


PRESENTATION

Internal view of the housing:

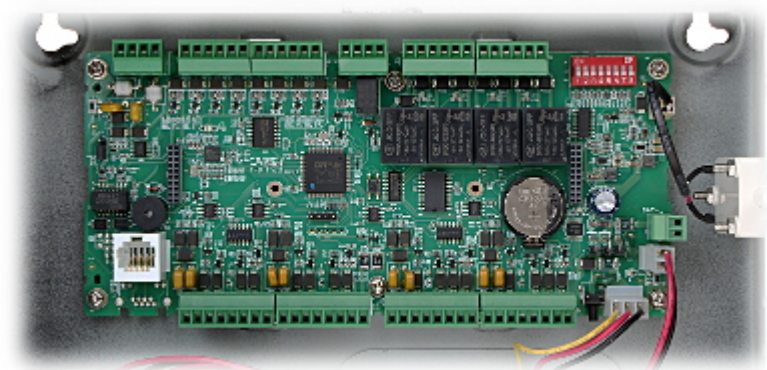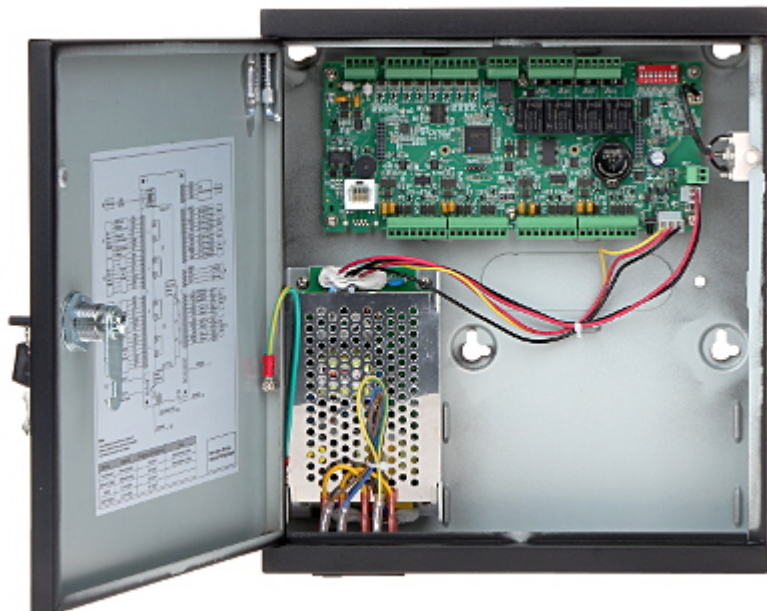

Connectors description:



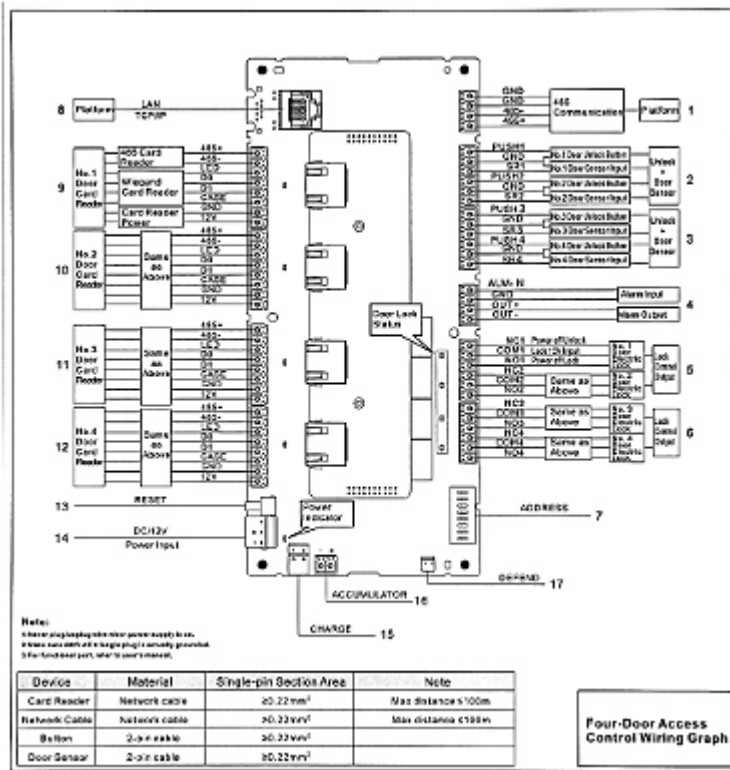


Bottom view:




Mounting side view:



Dimensions:

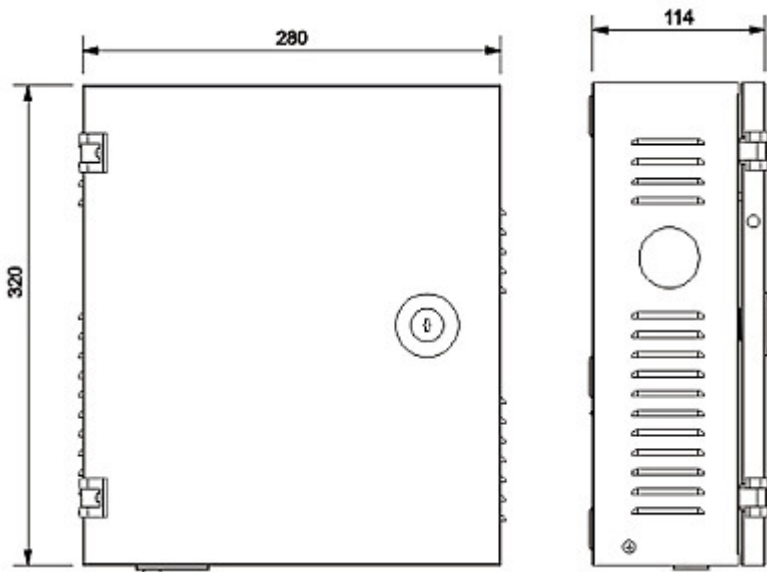

In the kit:

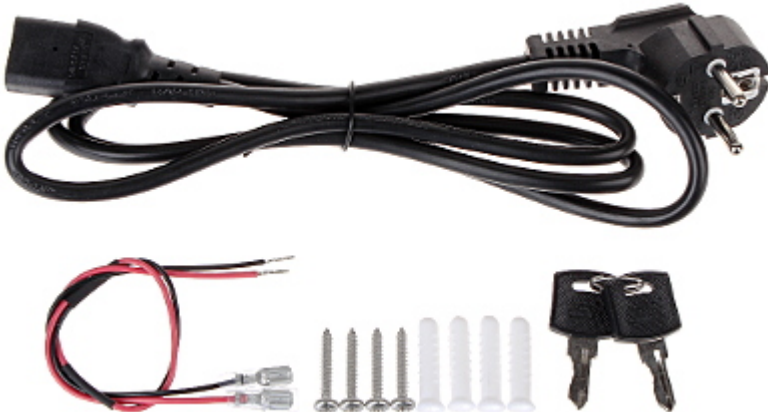

PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

