

Code: MC16-PAC-2-KIT

ACCESS CONTROLLER **MC16-PAC-2-KIT** ROGER

Net: **162 984.91 HUF** Gross: **162 984.91 HUF**

The MC16-PAC-2-KIT controller is intended to use in access control systems based on electrical control of door opening.



SPECIFICATION

Number of served transitions:	2
Number of supported readers:	8 pcs
Battery backup support:	max. 7 Ah
Input lines:	12 pcs (8 pcs on the mainboard)
Output lines:	8 pcs
Communication:	• RS-485, • RACS (Roger), • Wiegand
Power supply:	230 V AC
Main features:	• Two way door control • Power output : 2 x 0.2 A, 2 x 1.0 A • Power adapter : 13.8 V DC / 3.0 A • Battery charging current : 0.3 A / 0.6 A / 0.9 A • Protection against deep discharge of the battery • Tamper detection - opening the enclosure • Place for battery - 12 V / 7 Ah • Metal housing
Operation temp:	5 °C ... 40 °C
Permissible relative humidity:	10 % ... 95 % (non-condensing)
Weight:	3 kg
Dimensions:	295 x 285 x 90 mm
Manufacturer / Brand:	ROGER


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Guarantee:

3 years

PRESENTATION

Internal view of the housing:

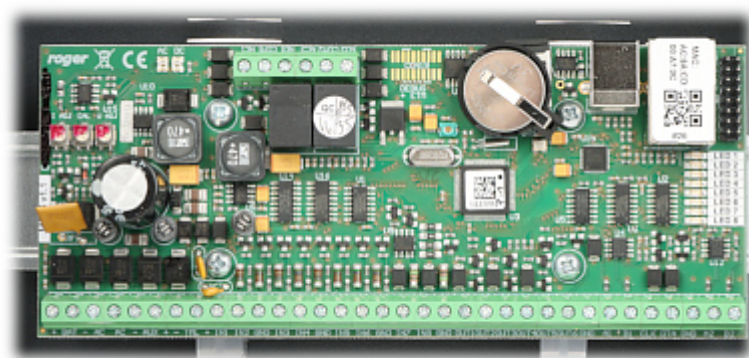

Mounting side of the housing box:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------