

Code: DS-K1T331W

# ACCESS CONTROLLER WITH FACE RECOGNITION **DS-K1T331W** - 1080p

Hikvision

Net: **329.10 EUR** Gross: **329.10 EUR**



Access controller with face recognition function.

Face recognition with extended functionality allows you to determine whether the observed person has a protective mask and in the absence of a mask perform the appropriate action, e.g. trigger a voice message reminding to cover the face.

## SPECIFICATION

Sensor:	CMOS
Matrix size:	2 Mpx
Resolution:	1920 x 1080 - 1080p

### Access control:

Cards support:	Outdoor proximity cards and key-fobs reader
Face recognition distance:	0.3 m ... 1.5 m
Memory:	<ul style="list-style-type: none"><li>• Memory of 1000 face templates</li><li>• Memory of 1500 RFID cards - after connecting an external RFID reader</li><li>• Non-volatile log buffer of the last 150 000 events</li></ul>

### General information:

Standard:	TCP/IP
IR illuminator:	—
LED illuminator:	✓
Video output:	—
RS-485 interface:	✓
Memory card slot:	—
Alarm inputs / outputs:	—
Audio:	Speaker built-in



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Network interface:	<ul style="list-style-type: none"> <li>• 10/100 Mb/s (RJ-45)</li> <li>• WiFi</li> </ul>
Network protocols:	TCP/IP, ISUP, ISAPI
WEB Server:	Built-in
ONVIF:	—
Default IP address:	192.168.1.64
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80
PC client access ports:	port 8000
Main features:	<ul style="list-style-type: none"> <li>• 3.97 " capacitive touch screen</li> <li>• Mechanical tamper protection</li> <li>• WDR - Wide Dynamic Range</li> <li>• AI detection : Face recognition</li> <li>• Configuration and management from the iVMS-4200 application</li> <li>• Port USB</li> <li>• Door lock control output</li> <li>• Possibility to connect an exit button and a reed switch to control the door status</li> </ul>
Power supply:	12 V DC / 1.5 A (power adapter included)
Power consumption:	≤ 18 W
Housing:	Metal
Color:	Black / Silver
"Index of Protection":	—
Operation temp:	-10 °C ... 55 °C
Weight:	0.31 kg
Dimensions:	120 x 110 x 23 mm (without bracket)
Supported languages:	English, Spanish, Portuguese, Russian
Manufacturer / Brand:	Hikvision
SAP Code:	302912468
Guarantee:	<b>3 years</b>

## PRESENTATION

Front view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Mounting side view:



Dimensions:

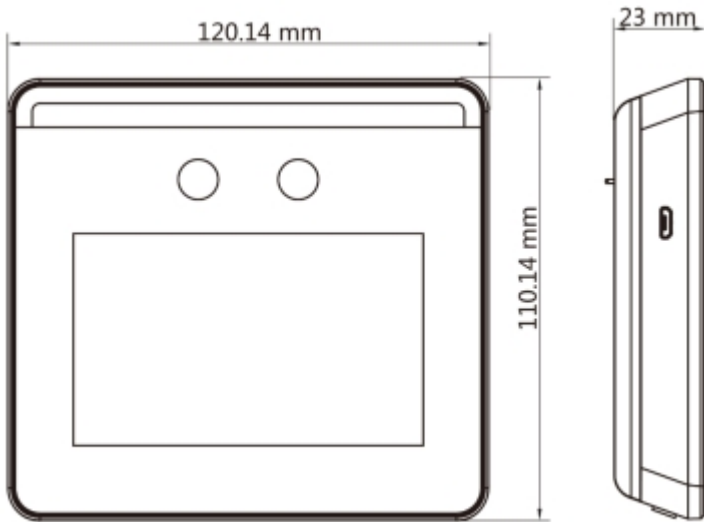

Connectors:



micro USB connector:




Rear view with wall mount attached:



Rear view with desk stand attached:



In the kit:

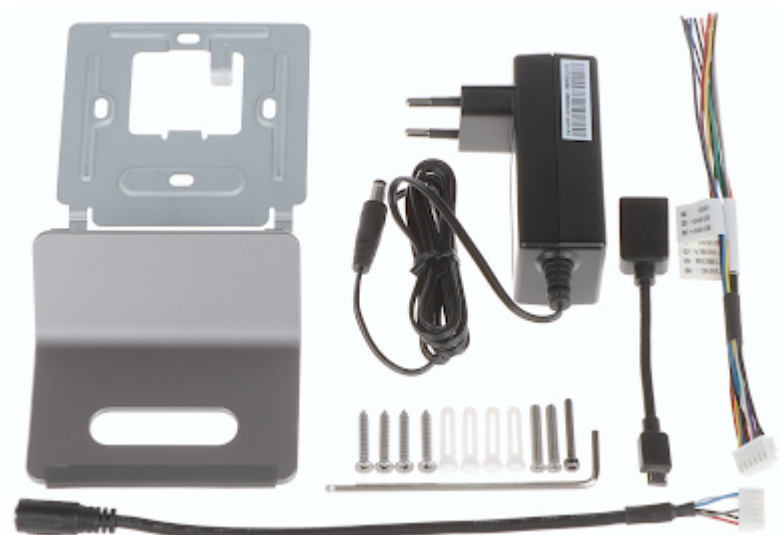

**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------