

Code: ASI1212F

## ACCESS CONTROLLER ASI1212F DAHUA

Net: 944.00 PLN Gross: 944.00 PLN

The ASI1212F controller can operate autonomously or in the network mode. The device enables single door or read in/out access control. In case of read in/out access control the controller must be connected to the external access reader of the ASR series or to the reader equipped with the Wiegand interface.



### SPECIFICATION

Cards support:	13.56 MHz S50
Reading distance of prox-keys:	1 ... 3 cm
Keyboard built-in:	—
Autonomous operation:	✓
Battery backup support:	—
Input lines:	3
Output lines:	3
Identification time:	< 1.5 s
Communication:	<ul style="list-style-type: none"><li>• RS-485</li><li>• Wiegand</li><li>• LAN</li></ul>
RS-485 interface:	✓
RS-232 interface:	—
Wiegand interface:	✓
Network interface:	10/100 Base-T
Default IP address:	192.168.1.108
Default admin user / password:	admin / - The administrator password should be set at the first start
USB:	—
Memory card slot:	—
Internal memory:	Support storage of 150 000 records

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Power supply:	12 V DC / 1 A
Main features:	<ul style="list-style-type: none"> <li>• Built-in LCD display 240 x 320 px - 2.8 " capacitive touch screen</li> <li>• Fingerprint reader built-in</li> <li>• Memory of 3000 fingerprint patterns</li> <li>• Possible connection of the external ASR series reader (read in/out door control)</li> <li>• Identification modes : Proximity identifier 13.56 MHz S50, Fingerprint, PIN, Any combination of the above</li> <li>• Remote access verification</li> <li>• Tamper detection - removing from mounting surface</li> <li>• Support for door contact and exit button</li> <li>• Indication of forced entry and the lack of closing doors</li> <li>• 30000 indexed users</li> <li>• Possibility to configure access groups</li> <li>• 128 General Purpose Schedules</li> <li>• 128 time periods within single Schedule</li> <li>• Holiday Schedules</li> <li>• Anti-passback</li> <li>• Integration with an alarm system via in/out line</li> <li>• Remote programming from PC</li> </ul>
"Index of Protection":	—
Operation temp:	-10 °C ... 45 °C
Permissible relative humidity:	5 ... 90 % (non-condensing)
Dimensions:	115 x 115 x 32 mm
Weight:	0.22 kg
Supported languages:	English
Manufacturer / Brand:	DAHUA
Guarantee:	<b>3 years</b>

## PRESENTATION

Front panel:




Rear view:



Connectors:




Example of application:

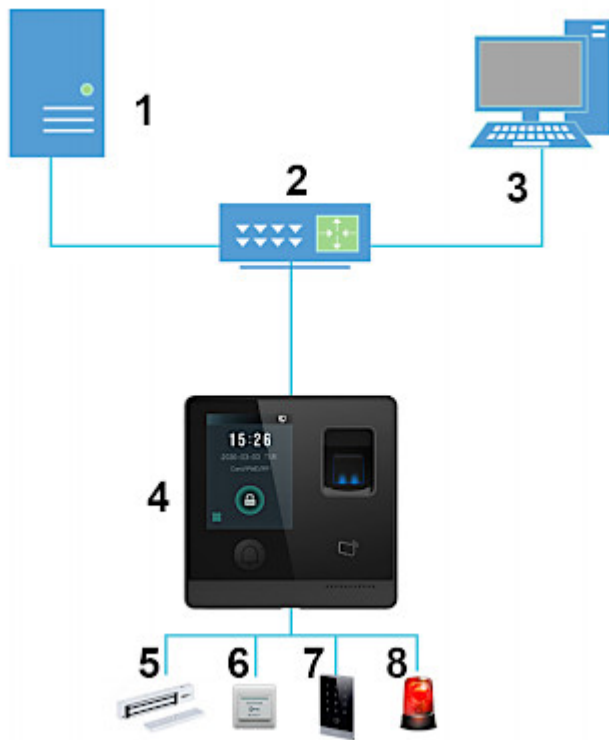

1. System management center
2. Switch
3. Remote client
4. ASI1212F
5. Electromagnetic lock
6. Door/gate opening button
7. Reader with keypad
8. Signaling device

In the kit:

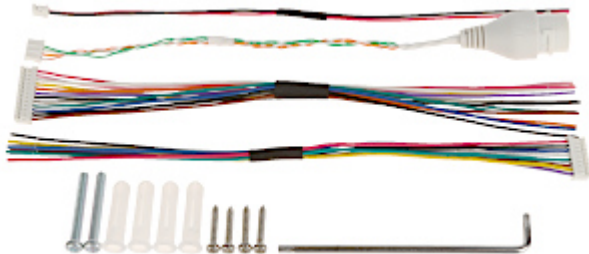

## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------