

Code: MC16-PAC-EX-1

## ACCESS CONTROLLER MODULE **MC16-PAC-EX-1** ROGER

Net: 1 400.00 PLN Gross: 1 400.00 PLN

The MC16-PAC-EX-1 controller is a multifunctional electronic module, intended for use in the RACS 5 v2 system, which enables the implementation of access control of the transition and building automation.

**Attention!** The pre-installed license includes functionality relating to control of the 1 transition and building automation.




### SPECIFICATION

Number of served transitions:	1
Inputs:	8
Outputs:	8
Number of users:	max. 12000 - Number of identifiers
Number of media per ID:	8 - Proximity card, PIN code, fingerprint, etc.
Number of permissions per ID:	100
Buffer memory:	8 000 000 events buffer
MCT readers support:	16 pcs
Readers connections:	4 pcs - Wiegand / PRT
Number of login points:	2
Number of access terminals:	4
Number of access zones:	2
Number of alarm zones:	2
Number of automation nodes:	2
Battery backup support:	12 V / 7 Ah
Communication:	<ul style="list-style-type: none"><li>• Ethernet - RJ-45 socket</li><li>• RS-485 interface</li><li>• RACS 5 v2 (Roger)</li></ul>
Main features:	<ul style="list-style-type: none"><li>• Integrated support in VISO EX software</li><li>• Functions in the VISO EX system: - MSSQL database</li><li>- work in distributed systems</li><li>- multi-station work</li><li>- monitoring of transitions with video preview</li><li>- T&amp;A event reporting</li><li>- maximum number of transitions in the system - unlimited</li><li>- division of the system into partitions operated by independent operators</li><li>- tool for integration with RACS5 (API) systems</li><li>- integration with many systems (elevator systems, building applications, SMS, BMS, PSIM, VMS, Active Directory systems)</li></ul>


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Power supply:	<ul style="list-style-type: none"> <li>• 17 ... 22 V AC</li> <li>• 10 ... 15 V DC</li> <li>• 22 ... 26 V DC</li> </ul>
Operation temp:	5 °C ... 40 °C
Permissible relative humidity:	10 % ... 95 % (non-condensing)
Weight:	0.14 kg
Dimensions:	175 x 72 x 30 mm
Manufacturer / Brand:	ROGER
Guarantee:	<b>3 years</b>

## PRESENTATION


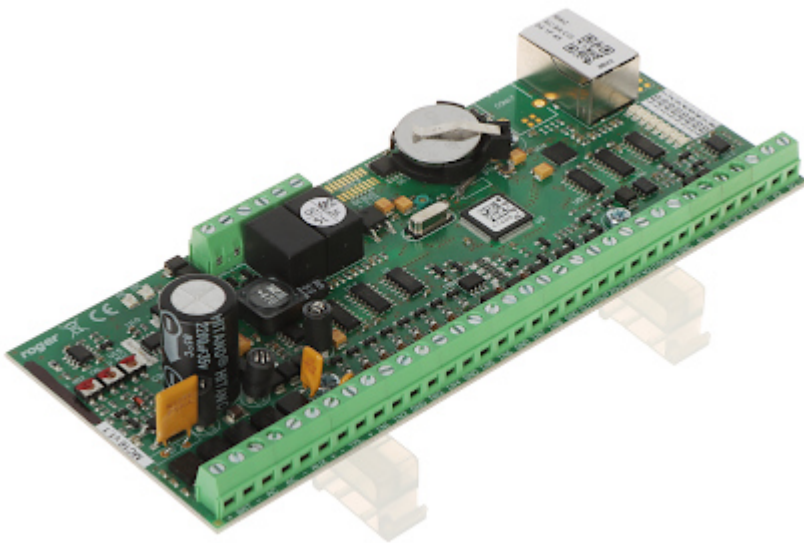


Top view:

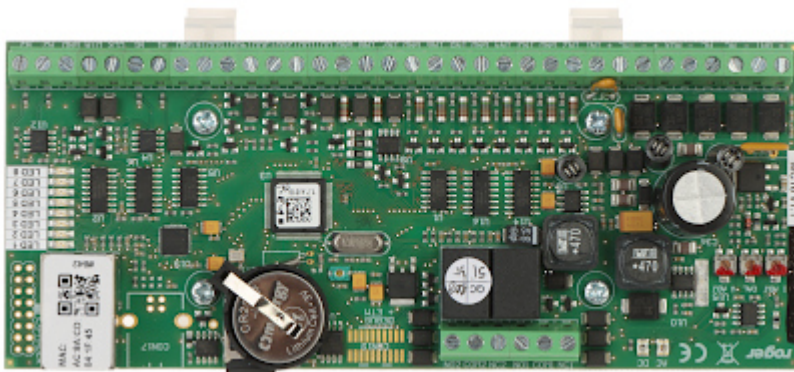


Connectors:




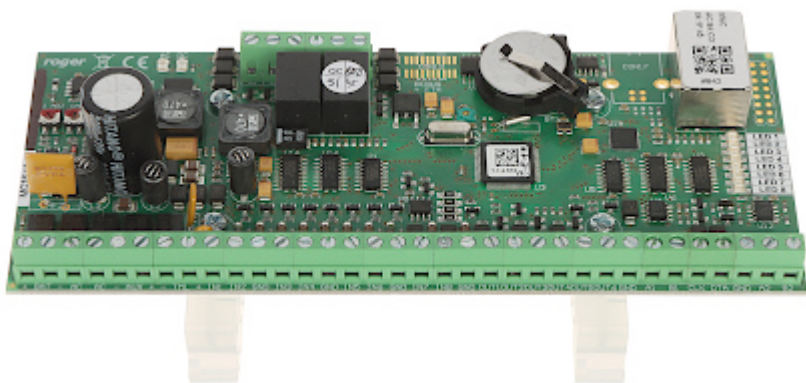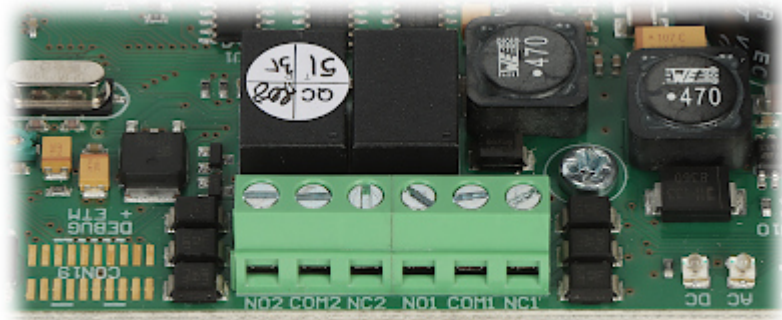

Mounting side view:

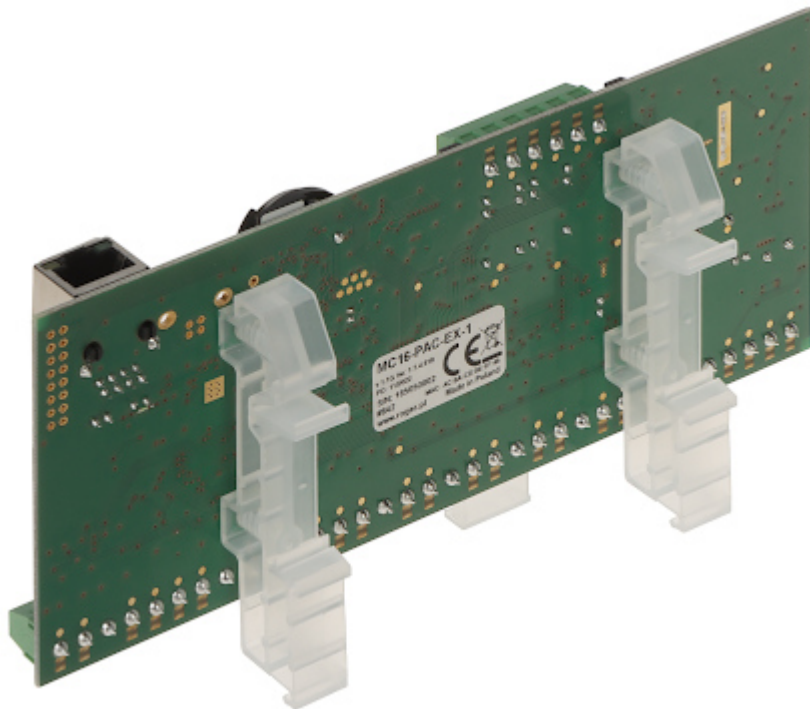

In the kit:

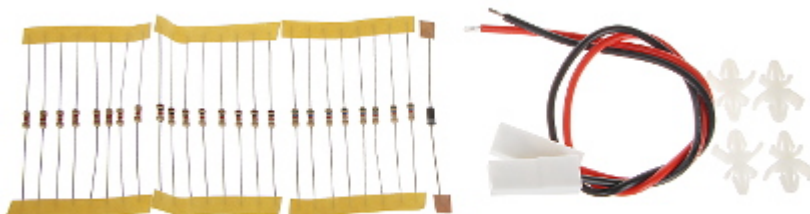

## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60