

Code: DL2-15-48-U

SWITCHING ADAPTER **DL2-15-48-U**

Net: **15.92 EUR** Gross: **15.92 EUR**

Switching adapter installed on the TS35/7.5 or 15 DIN rail, resistant to high operation temperatures (up to 70°C).



SPECIFICATION

Adapter type:	Switching
Power voltage:	• 85 ... 264 V AC • 120 ... 370 V DC
Output voltage:	48 V DC
Output voltage adjustment:	43.2 ... 55.2 V DC
Maximal load:	0.32 A
Output power:	15.3 W
Number of outputs:	1 pcs
Efficiency:	87 %
Housing type:	DIN
Protections:	• Short-circuit • Overload • Overvoltage
Operation temp. / Relative humidity:	-40 °C ... 70 °C / 10 ... 95 %
Weight:	0.06 kg
Dimensions:	90 x 17.5 x 58 mm
Guarantee:	3 years

PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Adapter connectors:



Top view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Rear panel (DIN rail installation):





Dimensions:

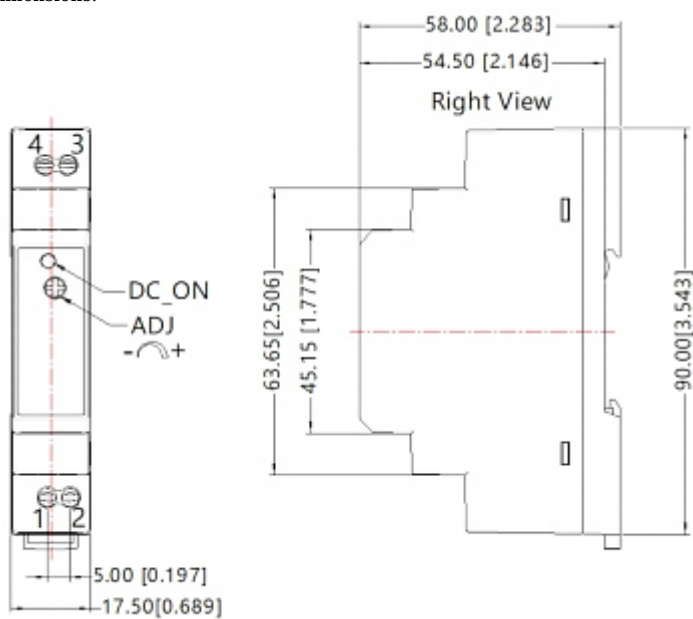

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------