

Code: SD42215-HC-LA

AHD, HD-CVI, HD-TVI, PAL SPEED DOME CAMERA OUTDOOR **SD42215-HC-LA** - 1080p 5 ... 75 mm DAHUA

Net: **614.03 EUR** Gross: **614.03 EUR**

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in 1080p resolution.

Thanks to the "Starlight" technology used, the camera only needs very low lighting to obtain a clear color image.

The HD-CVI interface allows to transmission of analog, composite video signal via coaxial cable. During transmission there are no delays and is maintained the original, high quality image.

Camera is according to IP66 Index of Protection norm.



SPECIFICATION

| | |
|---|---|
| Standard: | AHD, HD-CVI, HD-TVI, PAL |
| Resolution: | 1920 x 1080 - 1080p 1280 x 720 - 720p 960 x 576 - 960H |
| Sensor: | 1/2.8 " STARVIS™ CMOS |
| IR illuminator: | — |
| Lens: | 5 ... 75 mm |
| View angle: | 59 ° ... 5 ° |
| Optical zoom: | x 15 |
| Digital zoom: | x 16 |
| Rotation speed depending on ZOOM level: | ✓ |
| Horizontal rotation range: | 360 ° continuous |
| Vertical rotation range: | -2 ° ... 90 ° |
| Rotation speed (manual control): | • 0.1 °/s ... 300 °/s (horizontal), • 0.1 °/s ... 200 °/s (vertical) |
| Preset rotation speed: | • 300 °/s (horizontal) • 200 °/s (vertical) |
| PTZ control: | Via interface RS-485 |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

| | |
|------------------------------|---|
| Protocols: | Pelco-D, Pelco-P, DH-SD (auto detection) |
| Video output: | AHD / HD-CVI / HD-TVI / PAL, 1 Vpp 75 Ω |
| Audio: | <ul style="list-style-type: none"> • External microphone input • Audio support via coaxial cable - HD-CVI only |
| Number of presets: | 300 |
| Route settings: | 8 |
| Horizontal scan: | ✓ |
| Park action: | — |
| Alarm inputs / outputs: | 2 / 1 |
| Main features: | <ul style="list-style-type: none"> • WDR - 120 dB - Wide Dynamic Range • 2D-DNR, 3D-DNR - Digital Noise Reduction • ROI - improve the quality of selected parts of image • EIS - Electronic Image Stabilization • F-DNR (Defog) - Reduction of image noise caused by precipitation • D-ZOOM - Digital Zoom • Image rotation and mirror • ICR - Movable InfraRed filter • BLC/HLC - Back Light / High Light Compensation • Auto White Balance • 24 Configurable Privacy Zones • AGC - Automatic Gain Control |
| OSD menu: | ✓ |
| Power supply: | 12 V DC (power adapter included) |
| Power consumption: | <ul style="list-style-type: none"> • ≤ 9,6 W (typical) • ≤ 12 W (max) |
| Housing: | Speed Dome, Metal |
| Color: | White |
| "Index of Protection": | IP66 |
| Mechanical protection class: | IK10 |
| Operation temp: | -30 °C ... 60 °C |
| Weight: | 1.8 kg |
| Dimensions: | Ø 170 x 155 mm |
| Supported languages: | Polish, English |
| Manufacturer / Brand: | DAHUA |
| Guarantee: | 3 years |


PRESENTATION

Camera view after remove the dome (configuration jumpers are visible):







Mounting side view:

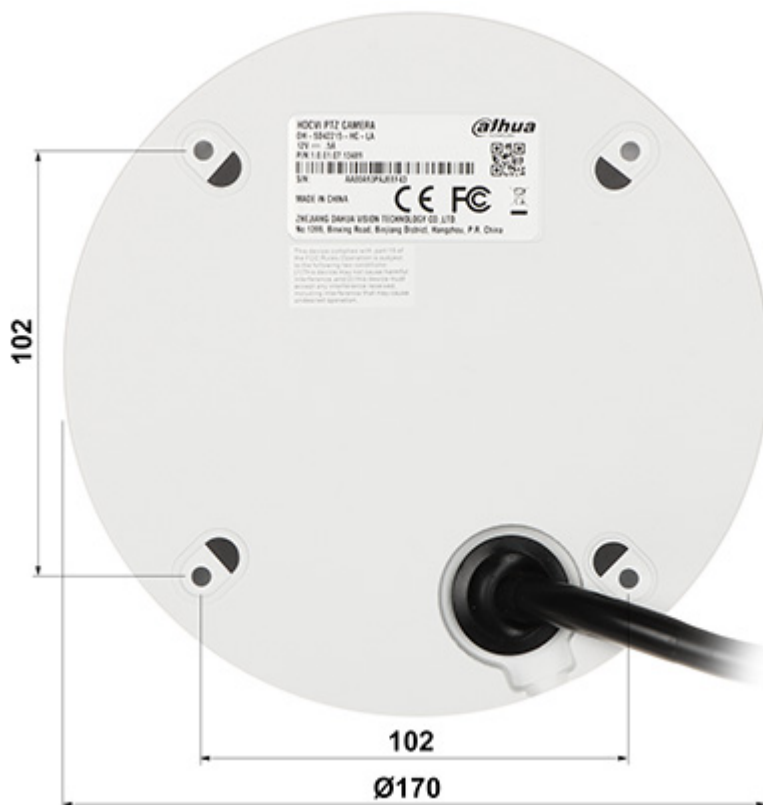

Dimensions:

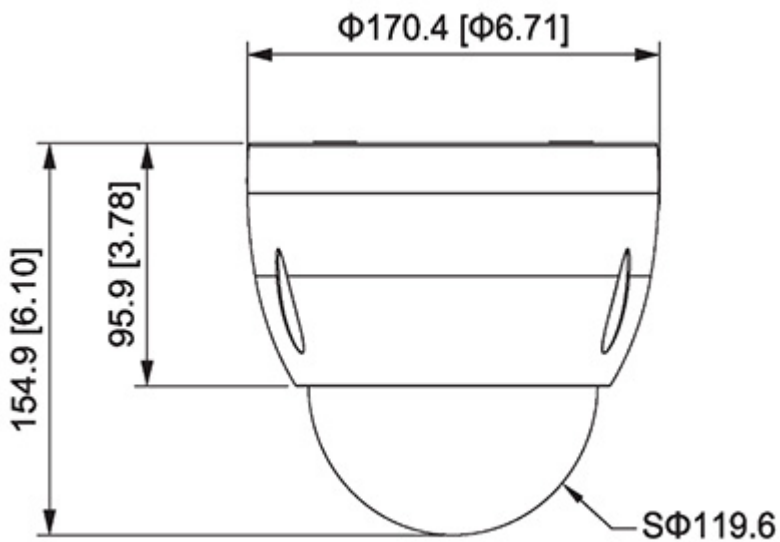

Camera connectors:

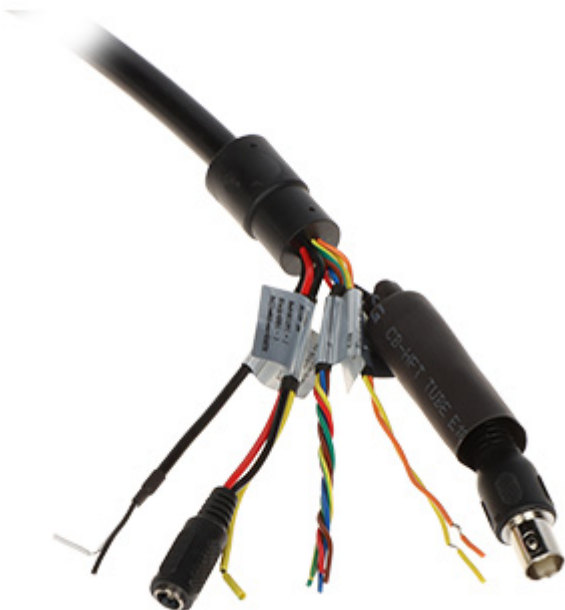

Connectors description:



In the kit:



OUR OPINIONS



- Thanks to the "Starlight" technology used, the camera only needs very low lighting to obtain a clear color image.

PACKAGE

| | |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|

