

SURVEILLANCE KIT APTI-KIT-NVR-20V2 4 CHANNELS - 1080p 3.6 mmNet: **1 104.00 PLN** Gross: **1 104.00 PLN**

The surveillance kit includes 4 cameras, DVR with Seagate 1TB hard disk, DC 48V/1.25A power adapter and 4 connecting cables with 20 m length each. The recorder included in the kit has a built-in 4-port PoE switch, so you can power the attached cameras directly from the recorder. The H.264 video compression standard using to record video data, allows to get the best possible quality of recorded image at minimal network transfer and disk storage capacity. The menu options layout has been designed for all users, even beginners can easy navigate and change parameters in DVR settings without any problem.

IP camera with efficient H.264 image compression algorithm for clear and smooth video streaming at maximal resolution of 1080p.

Attention! The DVR has installed the Seagate 1TB ST1000VM002 hard disk.

**SPECIFICATION**

Standard:	TCP/IP
Supported resolutions:	4 @ 1920 x 1080 px, 4 @ 1280 x 960 px, 4 @ 1280 x 720 px
Audio support:	4 Channels - Audio from cameras
Video outputs:	1 pcs HDMI 1 pcs VGA
Audio outputs:	—
Audio inputs:	—
Image compression method:	H.264
Maximal total frame rate:	100 fps @ 1920 x 1080 px, 100 fps @ 1280 x 960 px, 100 fps @ 1280 x 720 px
Supported hard drives:	1 x 6 TB SATA, In the kit : 1 TB Seagate
Recording modes:	Manual, Motion Detection, Schedule
Network protocols:	ONVIF, Private
External storage devices backup:	Records backup at (.avi) format to USB (pendrive)
Searching and playback the records:	Records searching: timeline or file list. Playback: forward, fast Playback max. 1 camera in the same time
Network functions:	Network Client Software and IE browser: live view, playback and backup of the records, configuration of the recorder parameters
Bitrate:	24 Mbps
ONVIF:	2.4
Mobile phones support:	Port no.: 554 or access by a cloud (P2P) • Android: Free application FREEIP PRO • iOS (iPhone): Free application FREEIP PRO
Default IP address:	192.168.1.88

Default admin user / password:	admin / 12345
Web browser access ports:	80, 554
PC client access ports:	5000, 554
Mobile client access ports:	554
Port ONVIF:	80
Alarm inputs / outputs:	—
PTZ control:	IP Speed Dome Cameras
Motion Detection:	Split the screen into zones : 24 x 18 motion zones
Mouse support:	✓
IR remote controller in the set:	—
Power supply:	48 V DC / 1.25 A
Operation temp:	-10 °C ... 55 °C
Weight:	0.94 kg
Dimensions:	220 x 219 x 53 mm
Supported languages:	English, Bulgarian, Czech, French, Spanish, German, Polish, Portuguese, Russian, Turkish, Hungarian, Italian

Camera:

Sensor:	1/2.9 " Sony CMOS IMX323
Digital Image Processor:	Hisilicon 3520D
Matrix size:	2.19 Mpx
Scanning system:	Progressive
Resolution:	1920 x 1080 - 1080p
Operation modes:	The main and sub streams can only occur in the configurations shown below : Firmware 3516CV300 IMX323 TF W 7.1.38.4 • Main stream : 1920 x 1080 + Sub stream : 720 x 480 + 352 x 288 • Main stream : 1920 x 1080 + Sub stream : 640 x 480 + 352 x 288
Lens:	3.6 mm
View angle:	• 72 ° (manufacturer data) • 80 ° (our tests result)
Range of IR illumination:	20 m
S/N ratio:	≥ 52 dB
RS-485 interface:	—
Memory card slot:	—
Image compression method:	H.264 / MJPEG
Alarm inputs / outputs:	—
Audio:	—
Bitrate:	64 ... 12000 kbps
Main stream frame rate:	25 fps @ 1080p
Network interface:	10/100 Base-T - RJ45
Network protocols:	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, SMTP
WEB Server:	Built-in - port 80



Max. number of on-line users:	10
ONVIF:	2.4
Main features:	<ul style="list-style-type: none"> • DNR - Digital Noise Reduction • ICR - Movable InfraRed filter • Flicker Control - The technology eliminates the tiring eyes flickering image effect • Possibility to change the resolution, quality and bit rate • BLC - Back Light Compensation • Motion Detection • Privacy zones • Mirror - Mirror image • Day/Night mode - configurable
Mobile phones support:	Port no.: 80 or access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Free application FREEIP • iOS (iPhone): Free application FREEIP
Default IP address:	192.168.1.168
Default admin user / password:	admin / admin
Web browser access ports:	80, 554
PC client access ports:	5000, 554
Mobile client access ports:	554
Port ONVIF:	80
RTSP URL:	rtsp://user:password@ip_address:80/0 - Main stream rtsp://user:password@ip_address:80/1 - Sub stream
Power supply:	<ul style="list-style-type: none"> • PoE (802.3af), • 12 V DC / 500 mA
Housing:	Dome, Aluminum
Color:	White
"Index of Protection":	IP66
Operation temp:	-20 °C ... 60 °C
Weight:	0.30 kg
Dimensions:	Ø 93 x 70 mm
Supported languages:	English, Bulgarian, Czech, French, Spanish, Dutch, German, Polish, Portuguese, Russian, Turkish, Italian

General information:

Connecting cable:	4 x 20 m - UTP cat. 5, RJ45
Power adapter:	1 pcs : 48 V / 1.25 A
Country of origin:	China
Manufacturer / Brand:	APTI
Guarantee:	2 years

PRESENTATION

DVR:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Internal view of the housing:




CAMERA:



Camera is out from clamping ring:



Camera mounting side view:

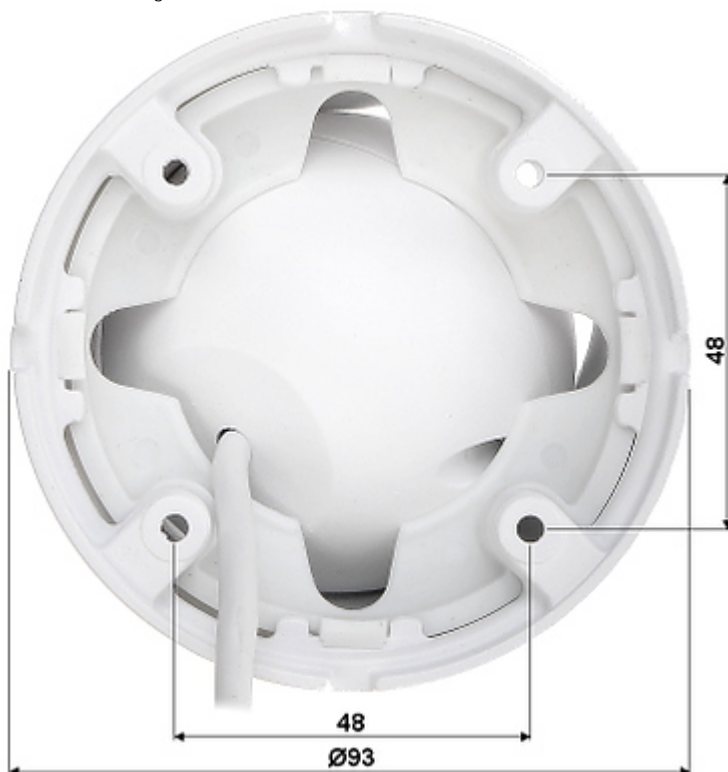

In the kit:



Package:



OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------