

Code: ETI-D3/50A

FUSE LINK **ETI-D3/50A** 50 A 500 V gG E33 ETI

Net: **6.19 PLN** Gross: **6.19 PLN**

Fuse-links are used as the most reliable protection of electrical installation against overload and short-circuit currents. All fuse-links have blown-fuse indicators which are visible through the screw cap when mounted.



SPECIFICATION


| | |
|-------------------------|---|
| Rated current: | 50 A |
| Rated voltage: | 250 V DC, 500 V AC |
| Fusing characteristics: | gG |
| Fuse base: | E33 |
| Type: | D |
| Size: | D3 |
| Breaking capacity: | 50 kA AC, 8 kA DC |
| Main features: | <ul style="list-style-type: none">• Low power and energy losses• Small temperature increase• High ability to limit short-circuit current• Stability of current-time characteristics and full selectivity of operation• Selective cooperation with over-current circuit breakers |
| Housing: | Ceramic |
| Weight: | 0.05 kg |
| Dimensions: | Ø 27 x 50 mm |
| Manufacturer / Brand: | ETI |
| Guarantee: | 2 years |

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Dimensions:

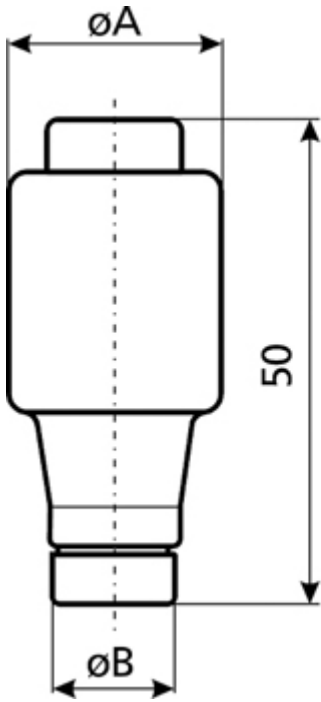

| [A] | $\varnothing A$ | $\varnothing B$ |
|-----|-----------------|-----------------|
| 32 | 27 | 16 |
| 35 | 27 | 16 |
| 40 | 27 | 16 |
| 50 | 27 | 18 |
| 63 | 27 | 20 |

Time-current characteristics:

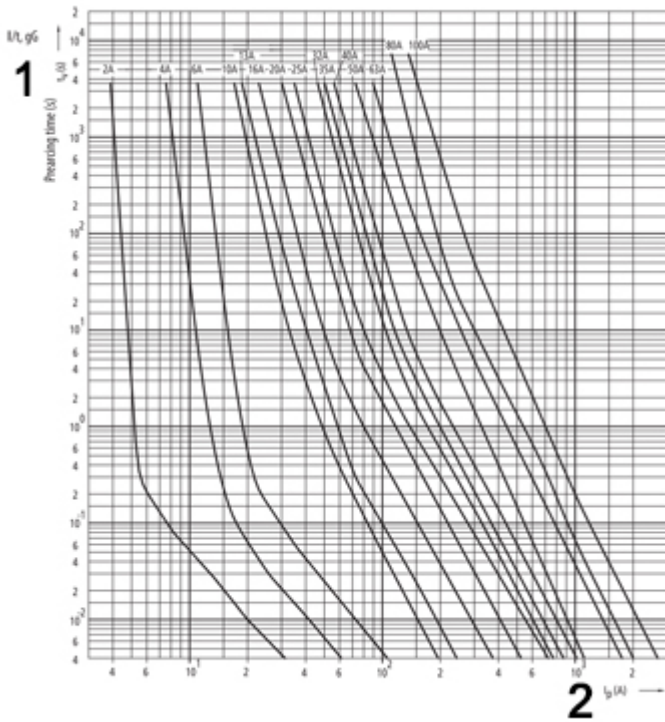

1. Prearcing time (s)
2. Prospective current (A)

PACKAGE

| | |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60