

Code: IPC-EB5400P

IP VANDALPROOF CAMERA **IPC-EB5400P** - 4.0 Mpx 1.18 mm - Fish Eye DAHUA

Net: **1 120.00 PLN** Gross: **1 120.00 PLN**



IP camera with "fish eye" wide-angle lens.
PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.

SPECIFICATION

Standard:	TCP/IP
Sensor:	1/3 " Progressive Scan CMOS
Matrix size:	4.0 Mpx
Scanning system:	Progressive
Resolution:	2592 x 1520 - 4.0 Mpx , 2048 x 1520 - 3.0 Mpx , 1600 x 1200 - UXGA , 1280 x 960 - 1.3 Mpx
Lens:	1.18 mm - Fish Eye / F2.0
View angle:	180 °
S/N ratio:	> 50 dB
RS-485 interface:	—
Image compression method:	H.264 / MJPEG
Alarm inputs / outputs:	1 / 1
Audio:	<ul style="list-style-type: none">• Microphone built-in• External microphone input• Audio output• Bi-directional audio streaming support
Bitrate:	20 ... 8192 kbps H.264
Main stream frame rate:	15 fps @ 4.0 Mpx 20 fps @ 3.0 Mpx
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
Memory card slot:	Micro SD memory cards up to 64GB support (possible local recording)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Default admin user / password:	admin / admin
Default IP address:	192.168.1.108
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
WEB Server:	Built-in
Max. number of on-line users:	20
ONVIF:	2.41
Main features:	<ul style="list-style-type: none"> • Heat map - the selection in the image by corresponding colors the areas with different traffic • 3D-DNR - Digital Noise Reduction • Possibility to change the resolution, quality and bit rate • Time mark and image description • Image rotation and mirror • Configurable: brightness, contrast, saturation • Privacy zones • Motion Detection
Vandal-proof:	✓
Power supply:	<ul style="list-style-type: none"> • PoE (802.3af), • 12 V DC / 480 mA
Power consumption:	≤ 6 W
Housing:	Dome - Metal
Color:	White
Operation temp:	-30 °C ... 60 °C
"Index of Protection":	IP66
Weight:	0.280 kg
Dimensions:	Ø 110 x 54 mm
Supported languages:	Polish, English
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Camera view after remove the Dome cover:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Mounting side view:




Camera connectors:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

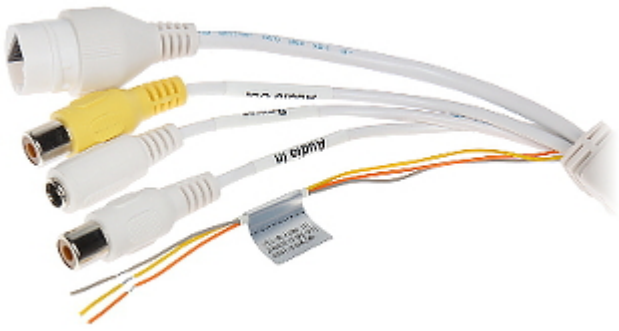

Operation modes:

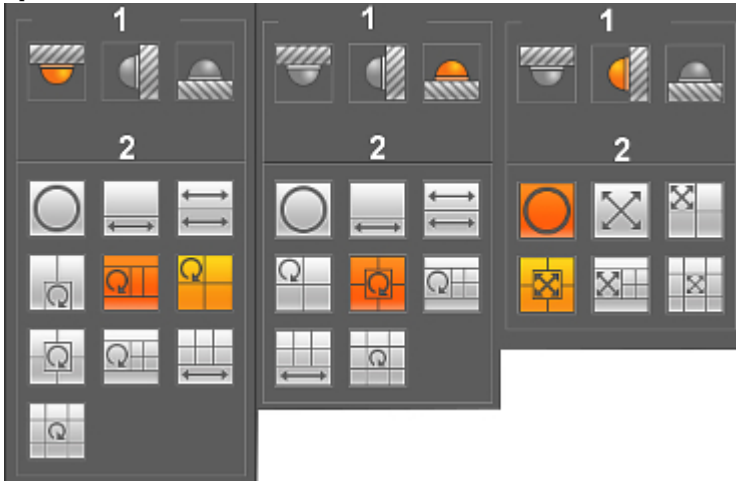

1. Installation type

2. Display modes

Display modes:

:

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60