

Code: DH-IPC-EB5531P

IP VANDALPROOF CAMERA **DH-IPC-EB5531P** - 5.0 Mpx 1.4 mm - Fish Eye DAHUA

Net: **3 281.08 NOK** Gross: **3 281.08 NOK**

IP camera with "fish eye" wide-angle lens.
PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.7 " Progressive Scan CMOS
Matrix size:	5.0 Mpx
Scanning system:	Progressive
Resolution:	2592 x 1944 - 5.0 Mpx , 2048 x 1536 - 3.0 Mpx , 1600 x 1200 - UXGA , 1280 x 960 - 1.3 Mpx
Lens:	1.4 mm - Fish Eye / F2.6
View angle:	180 °
S/N ratio:	> 50 dB
RS-485 interface:	—
Image compression method:	H.265 / H.265+ / H.264 / H.264+ / MJPEG
Alarm inputs / outputs:	—
Audio:	Microphone built-in
Bitrate:	• 24 ... 10240 kbps - H.264 • 14 ... 9984 kbps - H.265
Main stream frame rate:	25 fps @ 5 Mpx
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	HTTP, HTTPS, TCP, ARP, RTSP, RTP, UDP, SMTP, FTP, DHCP, DNS, DDNS, PPPoE, IPv4/IPv6, QoS, UPnP, NTP, Bonjour, IEEE 802.1x, Multicast, ICMP, IGMP, SNMP
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Free application DMSS, Android: Free application IMOU • iOS (iPhone): Free application DMSS, iOS (iPhone): Free application IMOU
Default IP address:	192.168.1.108
Default admin user / password:	admin / admin
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
WEB Server:	Built-in
Max. number of on-line users:	20
ONVIF:	16.12
Main features:	<ul style="list-style-type: none"> • IVS analysis : crossing the line (tripwire) intrusion • Heat map - the selection in the image by corresponding colors the areas with different traffic • ROI - improve the quality of selected parts of image • 3D-DNR - Digital Noise Reduction • Possibility to change the resolution, quality and bit rate • Time mark and image description • Configurable: brightness, contrast, saturation • Privacy zones • Motion Detection
Vandal-proof:	✓
Power supply:	<ul style="list-style-type: none"> • PoE (802.3af), • 12 V DC / 280 mA
Power consumption:	≤ 3.4 W
Housing:	Dome - Metal
Color:	White
"Index of Protection":	IP67
Vandal-proof:	IK08
Operation temp:	-30 °C ... 60 °C
Weight:	0.28 kg
Dimensions:	Ø 110 x 56 mm
Supported languages:	Polish, English
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Camera view after remove the Dome cover:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Memory card slot:



Mounting side view:



Operation modes:

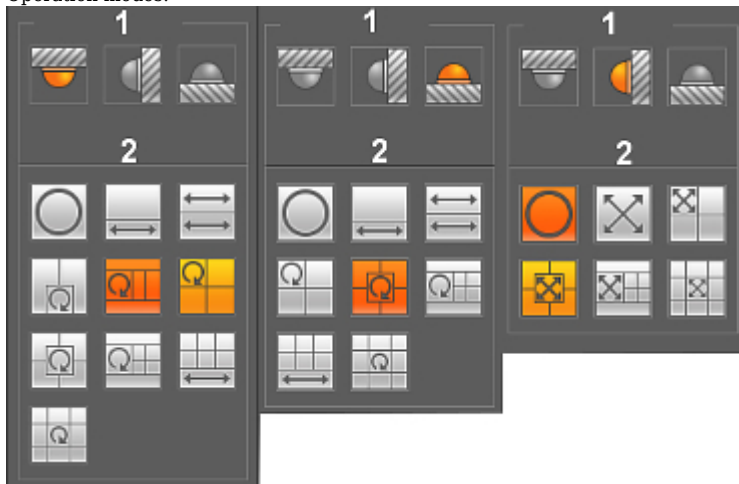

1. Installation type

2. Display modes

Display modes:

:

In the kit:





PACKAGE

Dimensions (L x W x H): 0x0x0 mm

Gross Weight: 0 kg

