

Code: DS-2CD63C2F-IVS(2MM)

# IP VANDALPROOF CAMERA **DS-2CD63C2F-IVS(2MM)** - 12.3 Mpx Hikvision

Net: **5 003.00 PLN** Gross: **5 003.00 PLN**

IP camera with "fish eye" wide-angle lens.  
Included camera software enables management and integrated monitoring of many network cameras. Its using allows to create large surveillance system.



## SPECIFICATION

Standard:	TCP/IP
Sensor:	1/1.7 " Progressive Scan CMOS
Matrix size:	12.3 Mpx
Scanning system:	Progressive
Resolution:	4000 x 3072 - 12.3 Mpx , 3072 x 3072 - 9.4 Mpx , 2560 x 2560 - 6.5 Mpx
Lens:	2.0 mm - Fish Eye / F2.4
View angle:	180 °
Range of IR illumination:	15 m
S/N ratio:	> 50 dB
RS-485 interface:	✓
Image compression method:	H.264+ / H.264 / MJPEG
Alarm inputs / outputs:	1 / 1
Audio:	<ul style="list-style-type: none"><li>• Microphone built-in</li><li>• External microphone input</li><li>• Speaker built-in</li><li>• Audio output</li><li>• Bi-directional audio streaming support</li></ul>
Bitrate:	256 ... 16384 kbps
Main stream frame rate:	20 fps @ 12.3 Mpx 25 fps @ 9.4 Mpx
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, IEEE 802.1x, QoS, IPv6, Bonjour
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) <ul style="list-style-type: none"><li>• Android: Free application <a href="#">iVMS-4500</a>, Android: Free application <a href="#">Hik-Connect</a></li><li>• iOS (iPhone): Free application <a href="#">iVMS-4500</a>, iOS (iPhone): Free application <a href="#">Hik-Connect</a></li></ul>
Default IP address:	192.168.1.64
Default admin user / password:	admin / -

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Web browser access ports:	80
PC client access ports:	Port no.: 8000 or access by a cloud (P2P)
Mobile client access ports:	8000
Port ONVIF:	80
RTSP URL:	<ul style="list-style-type: none"> <li>• Main stream rtsp://192.168.1.64:554/Streaming/Channels/101/ - RTSP - without authorization rtsp://user:password@192.168.1.64:554/Streaming/Channels/101/ - with authorization</li> <li>• Sub stream rtsp://192.168.1.64:554/Streaming/Channels/102/ - RTSP - without authorization rtsp://user:password@192.168.1.64:554/Streaming/Channels/102/ - with authorization</li> </ul>
ONVIF:	2.4
Max. number of on-line users:	20
Main features:	<ul style="list-style-type: none"> <li>• Intelligent image analysis : crossing the line (tripwire), intrusion</li> <li>• Heat map - the selection in the image by corresponding colors the areas with different traffic</li> <li>• 3D-DNR - Digital Noise Reduction</li> <li>• D-WDR - Wide Dynamic Range</li> <li>• Anti-Flicker - The technology eliminates the tiring eyes flickering image effect</li> <li>• Possibility to change the resolution, quality and bit rate</li> <li>• Time mark and image description</li> <li>• Image rotation and mirror</li> <li>• Configurable: brightness, contrast, saturation</li> <li>• Privacy zones</li> <li>• Motion Detection</li> </ul>
Power supply:	<ul style="list-style-type: none"> <li>• PoE (802.3at),</li> <li>• 12 V DC / 0.94 A</li> </ul>
Power consumption:	≤ 14.7 W
Housing:	Dome - Metal
Color:	White
"Index of Protection":	IP66
Vandal-proof:	IK10
Operation temp:	-30 °C ... 60 °C
Weight:	0.672 kg
Dimensions:	164 x 153 x 50 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, Danish, Estonian, Finnish, French, Greek, Spanish, Dutch, Lithuanian, Latvian, German, Norwegian, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Hungarian, Italian
SAP Code:	300809788
Manufacturer / Brand:	Hikvision
Guarantee:	<b>3 years</b>

## PRESENTATION

Front view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Camera view after remove the Dome cover:



Memory card slot:



Mounting side view:

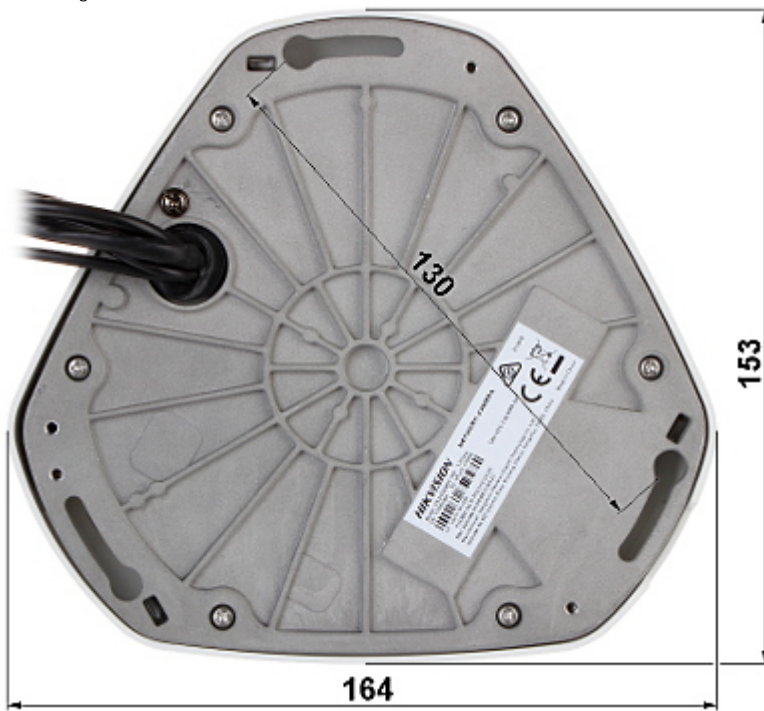

Camera connectors:



In the kit:



**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------