

Code: IPC-HUM8101

# IP CAMERA **IPC-HUM8101** PINHOLE - 1.3 Mpx 3.6 mm DAHUA

Net: **1 849.00 PLN** Gross: **1 849.00 PLN**

Indoor micro camera equipped with very good quality CMOS sensor.

Camera is equipped with PINHOLE type lens, needs only a very small hole to get right field of view. Included camera software enables management and integrated monitoring of many network cameras.



## SPECIFICATION

Standard:	TCP/IP
Sensor:	1/3 " Progressive Scan CMOS
Matrix size:	1.3 Mpx
Resolution:	1280 x 960 - 1.3 Mpx , 1280 x 720 - 720p 704 x 576 - D1 , 352 x 288 - CIF
Lens:	3.6 mm (pinhole)
View angle:	<ul style="list-style-type: none"><li>• 83 ° (manufacturer data)</li><li>• 72 ° (our tests result)</li></ul>
Min. illumination:	0.01 Lux / F2.8
S/N ratio:	> 50 dB
Audio:	<ul style="list-style-type: none"><li>• External microphone input</li><li>• Audio output</li><li>• Bi-directional audio streaming support</li><li>• Audio detection</li></ul>
RS-485 interface:	—
RS-232 interface:	✓
Bitrate:	48 ... 8192 kbps - H.264
Main stream frame rate:	25 fps @ 1280 x 960
Network protocols:	TCP/IP, HTTP, DHCP, DNS, DDNS, FTP, NTP
ONVIF:	2.42
Image compression method:	H.264 / MJPEG
Network interface:	10/100 Base-T (RJ-45)
Alarm inputs / outputs:	2 / 2
Mobile phones support:	Port 37777 <ul style="list-style-type: none"><li>• Android: Free application <a href="#">DMSS</a></li><li>• iOS (iPhone): Free application <a href="#">DMSS</a></li></ul>
Default admin user / password:	admin / admin
Default IP address:	192.168.1.108
Web browser access ports:	80, 37777

PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Memory card slot:	Cards support max. 64 GB
Power supply:	<ul style="list-style-type: none"> <li>• 12 V DC / 580 mA,</li> <li>• PoE (802.3af)</li> </ul>
Power consumption:	< 7 W
Main features:	<ul style="list-style-type: none"> <li>• BLC - Back Light Compensation</li> <li>• HLC - High Light Compensation (spot)</li> <li>• WDR - Wide Dynamic Range</li> <li>• 3D-DNR - Digital Noise Reduction</li> <li>• Configurable Privacy Zones</li> <li>• IVS analysis - crossing the line (tripwire), intrusion, abandoned/missing object, scene changing, face detection</li> </ul>
Length of the cable:	8 m
Operation temp:	-30 °C ... 60 °C
Weight:	0.20 kg - Network module 0.22 kg - Camera
Dimensions:	110 x 83 x 24 mm - Network module Ø 27 x 49 mm - Camera
Supported languages:	English, Polish
Manufacturer / Brand:	DAHUA
Guarantee:	<b>3 years</b>

## PRESENTATION

Network module:




Camera is very small:



Device connectors:



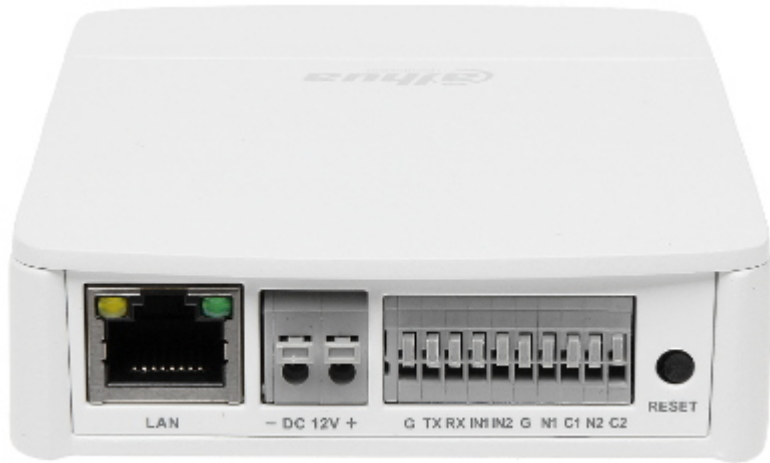

See how to initialize DAHUA cameras:

:

In the kit:



## OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at direct strong light opposite to camera:



Camera image at night conditions, at different illumination values show below:

1 LUX:



0.1 LUX:



0.01 LUX:



## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

