

Code: BCS-L-PIP12FW

## IP CAMERA **BCS-L-PIP12FW** PINHOLE - 1080p 2.8 mm BCS Line

Net: **283.83 EUR** Gross: **283.83 EUR**



Indoor micro camera equipped with very good quality CMOS sensor. The camera has extensive functions of intelligent image analysis.

Camera is equipped with PINHOLE type lens, needs only a very small hole to get right field of view. Camera has microphone and audio output built-in.

### SPECIFICATION

Standard:	IP
Resolution:	1920 x 1080 - 1080p , 1280 x 960 - 1.3 Mpx 1280 x 720 - 720p
Sensor:	1/3 " Progressive Scan CMOS
Lens:	2.8 mm @ F2.0 (pinhole)
View angle:	96 °
Range of IR illumination:	—
Memory card slot:	—
Image compression method:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Alarm inputs / outputs:	—
Audio:	<ul style="list-style-type: none"><li>• Audio input</li><li>• Microphone built-in,</li><li>• Audio output</li><li>• Bi-directional audio streaming support</li></ul>
Main stream frame rate:	25 fps @ 1080p
Interface:	10/100 Base-T (RJ-45)
WEB Server:	Built-in
Max. number of on-line users:	20
ONVIF:	✓

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Intelligent image analysis:	<ul style="list-style-type: none"> <li>• intrusion</li> <li>• crossing the line (tripwire)</li> </ul>
Main features:	<ul style="list-style-type: none"> <li>• WDR - 120 dB - Wide Dynamic Range</li> <li>• 3D-DNR - Digital Noise Reduction</li> <li>• BLC - Back Light Compensation</li> <li>• HLC - High Light Compensation (spot)</li> <li>• Configurable Privacy Zones</li> <li>• Motion Detection</li> <li>• AWB - Auto White Balance</li> <li>• AGC - Automatic Gain Control</li> <li>• AES - Auto Electronic Shutter</li> <li>• Day/night mode</li> <li>• ICR - Movable InfraRed filter</li> <li>• Mirror - Mirror image</li> <li>• D-ZOOM - Digital Zoom : 16 x</li> </ul>
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) <ul style="list-style-type: none"> <li>• Android: Free application <a href="#">BCS Manager</a></li> <li>• iOS (iPhone): Free application <a href="#">BCS Manager</a></li> </ul>
Default IP address:	192.168.1.108
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Power supply:	12 V DC / 130 mA
Power consumption:	max. 1.56 W
Housing:	Mini - Metal
Color:	Black
"Index of Protection":	—
Mechanical protection class:	—
Operation temp:	-40 °C ... 60 °C
Weight:	0.08 kg
Dimensions:	<ul style="list-style-type: none"> <li>• 44 x 35 x 30 mm</li> <li>• 50 cm (cable length)</li> </ul>
Supported languages:	Polish, English, Czech, French, Spanish, Dutch, German, Portuguese, Russian, Romanian, Turkish, Ukrainian, Hungarian, Vietnamese, Italian
Manufacturer / Brand:	BCS Line
Guarantee:	<b>3 years</b>

## PRESENTATION

Camera is very small:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



Front view:




Rear view:



Camera connectors:



Camera dimensions:

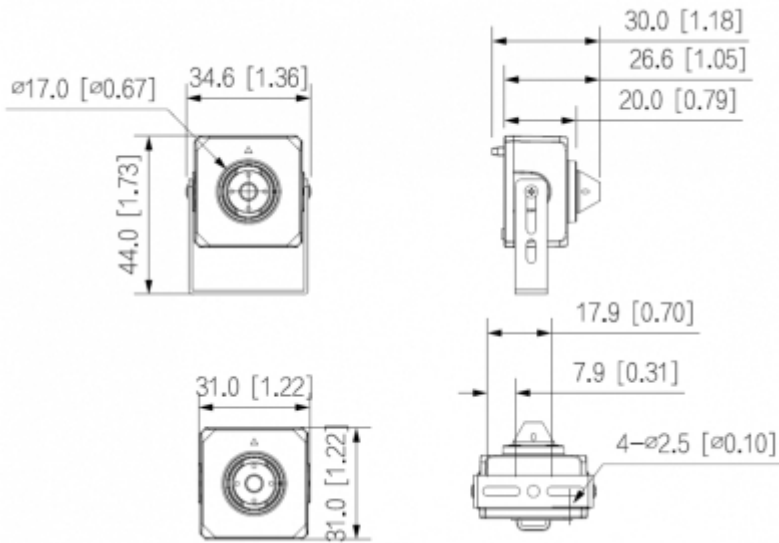

In the kit:



**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

