

Code: KTW02

VIDEO DOORPHONE KIT **KTW02** DAHUA

Net: **343.79 EUR** Gross: **343.79 EUR**

IP Video Doorphone Kit with 7-inch touch screen monitor, the ability of alarm integration and control of 1 lock, and also with remote intercom from mobile application. It can be also used as simple alarm control panel, or notification module by the support 6 alarm inputs.

The set includes: the VTH2621G-WP internal panel, the VTO2311R-WP video doorphone and 2 power supply adapters 12V/2A.

ATTENTION! The device does not support the Dahua analogue system.



SPECIFICATION

Sensor:	1/2.8 ", 2 Mpx CMOS
View angle:	110 °
Image compression method:	H.264 / H.265
IR illuminator:	✓
Resolution:	• Main stream : 1280 x 720, 800 x 480, 720 x 576, 352 x 288 • Sub stream : 1920 x 1080, 800 x 480, 720 x 576, 352 x 288, 320 x 240
proximity reader built-in:	Access control cards - 13.56 MHz S50
Wireless transmission range:	The range limited only by the availability of the Wi-Fi network
Wi-Fi standard:	IEEE 802.11b / IEEE 802.11g / IEEE 802.11n
Network interface:	• Ethernet 10 / 100 Mbps • Wi-Fi 2.4 GHz
The number of subscribers served:	1
UTP category:	UTP cat. 5e
Main features:	• It can only work with the mobile application, without the VTH monitor, • The function of the monitor with the ability to open the door can be a smartphone, tablet or the VTH indoor panel, • Micro SD memory cards up to 256GB support (possible local recording), • Bidirectional communication, • Microphone built-in, • Speakers built-in, • Echo suppression and reduction / digital noise reduction, • Tamper detection - opening the enclosure, • Possibility to connect an exit button and a reed switch to control the door status, • Output for the additional lock release button, • SOS support, • WDR - 120 dB - Wide Dynamic Range, • 2D-DNR, 3D-DNR - Digital Noise Reduction, • Day/night mode, • ICR - Movable InfraRed filter

Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Power supply:	• PoE (802.3af), • 12 V DC / 1 A
Power consumption:	• ≤ 6 W (operation) • ≤ 3.5 W (Standby mode)
Housing:	Aluminum alloy + Plastic (PC + ABS), Waterproof
Color:	Graphite
"Index of Protection":	IP65
Operation temp:	-40 °C ... 60 °C
Weight:	• 0.24 kg (with cover) • 0.18 kg (without cover)
Dimensions:	• 170 x 57 x 35 mm (with cover) • 160 x 50 x 30 mm (without cover)

INDOOR PANEL:

Shield:	7 " capacitive touch screen
Resolution:	1024 x 600
Internal memory:	—
Memory card slot:	—
Main features:	• Wi-Fi module - 2.4 GHz IEEE 802.11 b/g/n, • Protections : WPA/WPA2, WPA-PSK/WPA2-PSK, • Echo suppression and reduction / digital noise reduction, • IP Dahua cameras support, • SOS support, • Microphone built-in, • Speakers built-in, • Bidirectional communication, • Volume adjustment, • Receive and view the published information from the management center, • DND mode, • The ability of direct communication between two or more panels ,
Controlling:	capacitive touch screen
Alarm inputs:	6 (1 - as a bell)
Alarm outputs:	1
Housing:	Plastic (PC + ABS)
Color:	Black
Power supply:	• PoE (802.3af), • 12 V DC / 1 A
Power consumption:	• ≤ 6 W (operation) • ≤ 2 W (standby)
Operation temp:	-10 °C ... 55 °C
Weight:	0.33 kg
Dimensions:	190 x 135 x 26 mm

POWER SUPPLY ADAPTER:

In the kit:	2 pcs
Voltage:	12 V DC
Current efficiency:	2 A
Weight:	0.13 kg
Dimensions:	85 x 39 x 80 mm



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Length of the cable:	1.5 m
General information:	
Supported languages:	Polish, English, Bulgarian, Czech, Finnish, Slovenian, Hungarian, Slovak
Guarantee:	3 years
Manufacturer / Brand:	DAHUA

PRESENTATION

INDOOR PANEL:



Rear view:





Connectors view:



VIDEO DOORPHONE:



View after removing the rain cover:



Rear view:



Connectors view:



Connectors description:






Example of application:



- 1 - Door station
 - 2 - Indoor Panel
 - 3 - Router WiFi
 - 4 - Remote client
- In the kit:



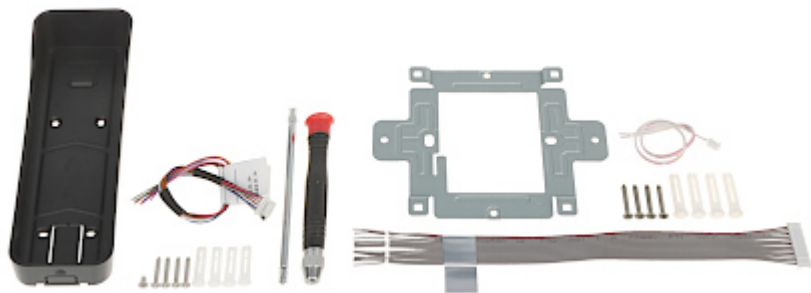

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

