

Code: KTP03

VIDEO DOORPHONE KIT **KTP03** DAHUA

Net: **456.29 EUR** Gross: **456.29 EUR**

IP video doorphone kit with a 7-inch touchscreen monitor, 2 inputs support, and remote intercom from a mobile application. It can be also used as simple alarm control panel, or notification module by the support 6 alarm inputs.

The set includes: the VTH2621G-P internal panel, the VTO2111D-P-S2 video doorphone and the PFS3006-4ET-36 PoE switch.

ATTENTION! The device does not support the Dahua analogue system.



SPECIFICATION

Sensor:	1/4 ", 1 Mpx CMOS
View angle:	107 °
Image compression method:	H.264
IR illuminator:	✓
proximity reader built-in:	Access control cards - 13.56 MHz S50
The number of subscribers served:	1
UTP category:	UTP cat. 5e
Main features:	• It can only work with the mobile application, without the VTH monitor • The function of the monitor with the ability to open the door can be a smartphone, tablet or the VTH indoor panel • Motion Detection • WDR - Wide Dynamic Range • Bidirectional communication, • Microphone built-in, • Speakers built-in, • Tamper detection - opening the enclosure, • Door contact and request button for exit inputs
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Power supply:	• PoE (802.3af), • 12 V DC / 1000 mA
Power consumption:	≤ 5 W
Housing:	Plastic, Waterproof
Color:	Graphite
"Index of Protection":	IP65 - after additional sealing the housing connection with the mounting surface, e.g. with silicone
Operation temp:	-30 °C ... 60 °C
Weight:	0.16 kg

Dimensions:	135 x 71 x 35 mm
INDOOR PANEL:	
Shield:	7 " capacitive touch screen
Resolution:	1024 x 600
Internal memory:	—
Memory card slot:	—
Main features:	• Echo suppression and reduction / digital noise reduction, • IP Dahua cameras support, • SOS support, • Microphone built-in, • Speakers built-in, • Bidirectional communication, • Volume adjustment, • Receive and view the published information from the management center, • DND mode ,
Controlling:	capacitive touch screen
Alarm inputs:	6 (1 - as a bell)
Alarm outputs:	1
RS-485 interface:	—
Power supply:	• PoE : 36 V ... 57 V DC / 350 mA, • 12 V DC / 1 A
Power consumption:	• ≤ 6 W (operation) • ≤ 2 W (standby)
Operation temp:	-10 °C ... 55 °C
Color:	Black
Weight:	0.34 kg
Dimensions:	190 x 135 x 26 mm

SWITCH PoE:

Standards:	IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3af, IEEE 802.3at
Management:	—
LAN ports:	• 2 x RJ45 10/100 Base-TX - Uplink, • 4 x RJ45 10/100 Base-TX (4 x PoE (802.3af/at))
LED diodes:	Power, Link/Act, PoE
Transmission speed:	10 / 100 Mbps : 2 LAN ports + 4 LAN & PoE ports
Maximal output power:	30 W / port PoE
Maximal total power:	36 W
MAC addresses table:	2k
Operation modes:	• Extend On : 250 m, 10 Mbps • Extend Off : 100 m, 100 Mbps
Main features:	• PoE power mode : The device supports 8-pin power supply • EXTEND mode - ports PoE1, PoE2, PoE3, PoE4 support transmission up to 250 m • Watchdog PoE / PD Alive mode - monitoring of the ports that power PoE devices and automatic restart by cutting off the power supply when an unresponsive device is detected • protection against lightning discharges and voltage differences and strokes between devices • Kensington Lock
Certificates:	CE, FCC
Power supply:	100 V ... 240 V AC
Operation temp:	-10 °C ... 55 °C



Weight:	0.56 kg
Dimensions:	194 x 108 x 35 mm
General information:	
Supported languages:	Polish, English
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

INDOOR PANEL:



Rear view:



Connectors view:



VIDEO DOORPHONE:



Front view:



Rear view:



Connectors view:



Switch PoE:



Front view:




1. LAN: Uplink
2. LAN + PoE

Rear view (power connector):




Example of application:

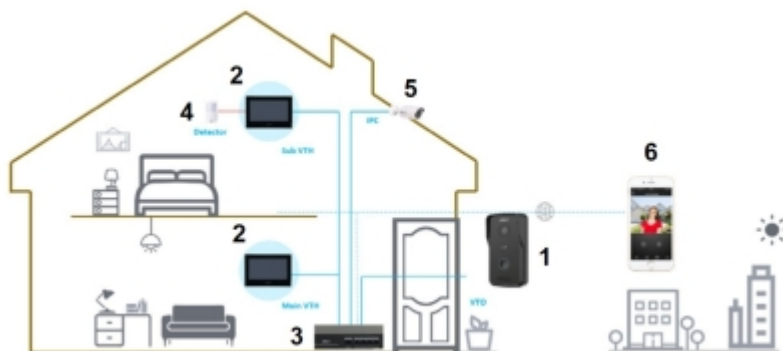

- 1 - Door station
- 2 - Indoor Panel
- 3 - Switch PoE
- 4 - Motion detector
- 5 - IP Camera
- 6 - Remote client

In the kit:

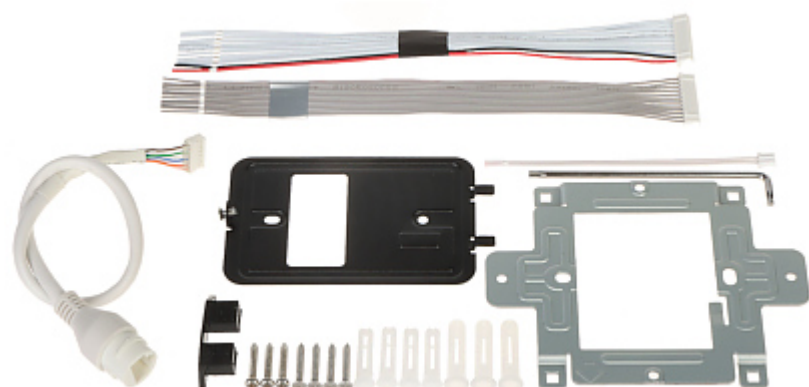

OUR OPINIONS



- The internal panel supports the H.265 codec.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------