

Code: DS-2CD4A26FWD-IZS/P

IP CAMERA ANPR **DS-2CD4A26FWD-IZS/P** - 1080p 2.8 ... 12 mm - MOTOZOOM Hikvision

Net: **1 301.58 CAD** Gross: **1 301.58 CAD**

The IP ANPR (Automatic Number Plate Recognition) Camera is designed for auto recognition of the vehicle number plates.

The used motozoom lens with 2.8 ... 12 mm focal length allows to remote view angle adjustment. The "Darkfighter" series cameras provide a clear color image even at very poor lighting.

PoE powering possibility, compatible with the 802.3at standard makes the device more universal and easier to install.



SPECIFICATION

| | |
|-------------------------------|---|
| Standard: | TCP/IP |
| Sensor: | 1/1.8 " Progressive Scan CMOS |
| Matrix size: | 2.1 Mpx |
| Resolution: | 1920 x 1080 - 1080p 1280 x 960 - 1.3 Mpx 1280 x 720 - 720p |
| Lens: | 2.8 ... 12 mm - Motozoom |
| View angle: | 92 ° ... 32 ° |
| Range of IR illumination: | 50 m |
| S/N ratio: | > 50 dB (AGC off) |
| Compression: | H.264 / H.264H / MPEG-4 / MJPEG |
| Main stream frame rate: | 50 fps - 1080p |
| Network interface: | 10/100 Base-T (RJ-45) |
| Network protocols: | TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, SNMP, IGMP, IEEE 802.1x, QoS, IPv6 |
| WEB Server: | Built-in, NVR compliance |
| Max. number of on-line users: | 20 |
| ONVIF: | 2.4 |
| Memory card slot: | Micro SD memory cards up to 128GB support (possible local recording) |
| Alarm inputs / outputs: | 1 / 1 |
| Audio: | <ul style="list-style-type: none">• External microphone input• Audio output• Bi-directional audio streaming support |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

| | |
|------------------------|--|
| RS-485 interface: | — |
| Mobile phones support: | — |
| Main features: | <ul style="list-style-type: none"> • Max. speed of a moving vehicle : 120 km/h • Image analysis : License plate recognition, Gate opening, White list - Black list, License plate recognition of the coming and moving away vehicles, Export report to xls file, • Motozoom lens - Control from a Web browser • WDR - 120 dB - Wide Dynamic Range • EIS - Electronic Image Stabilization • F-DNR (Defog) - Reduction of image noise caused by precipitation • 3D-DNR - Digital Noise Reduction • ROI - improve the quality of selected parts of image • ICR - Movable InfraRed filter • BLC - Back Light Compensation • Video output : CVBS - BNC socket • Day/Night mode (color/b&w/auto/scheduled-switch/triggered by alarm input/triggered by video) • The "Darkfighter" series cameras provide a clear color image even at very poor lighting |
| Power supply: | <ul style="list-style-type: none"> • PoE (802.3at), • 12 V DC / 1.1 A |
| Power consumption: | <ul style="list-style-type: none"> ≤ 13.3 W @ 12 V DC ≤ 17.6 W @ PoE |
| Housing: | Compact, Metal / Plastic |
| Color: | White |
| "Index of Protection": | IP67 |
| Vandal-proof: | — |
| Operation temp: | -30 °C ... 60 °C |
| Weight: | 1.5 kg |
| Dimensions: | 312 x 104 x 100 mm |
| Supported languages: | English |
| Manufacturer / Brand: | Hikvision |
| SAP Code: | 300725386 |
| Guarantee: | 3 years |

PRESENTATION

Front view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Side view:




Bottom view:




Camera connectors:



Mounting side view:

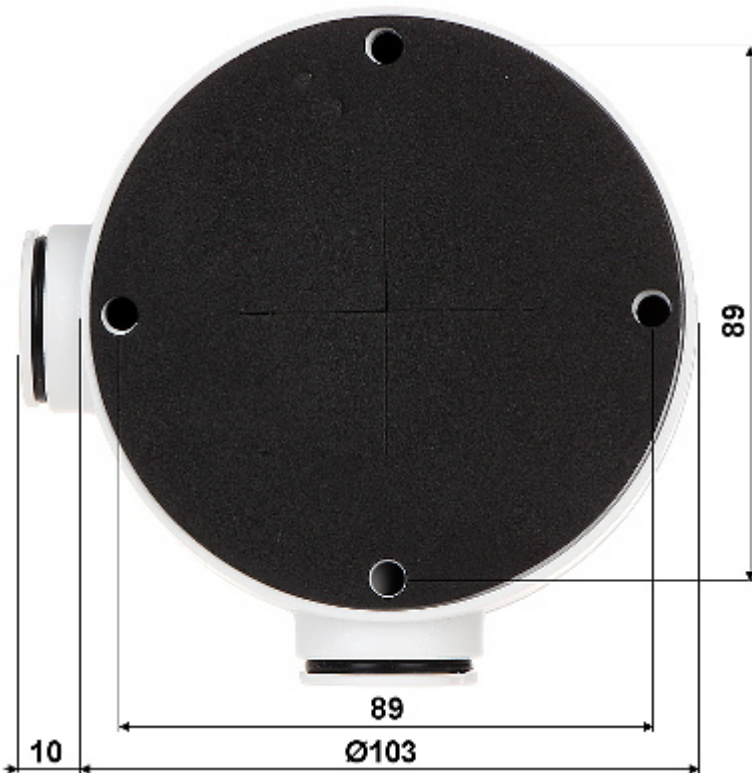

Camera dimensions:

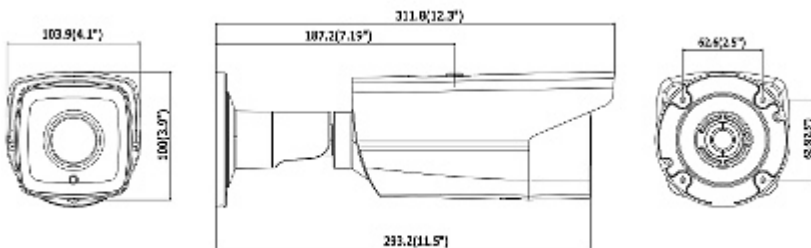

In the kit:



OUR OPINIONS



- Motozoom lens.

PACKAGE

| | |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60