

Code: DH-SD6C230T-HN

IP SPEED DOME CAMERA OUTDOOR **DH-SD6C230T-HN** - 1080p 4.5 ... 135 mm DAHUA

Net: **3 500.00 PLN** Gross: **3 500.00 PLN**

IP camera equipped with very good high resolution sensor. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition.

Built-in IR illuminator allows to operate at night conditions, and vari-focal lens with wide range of view angle adjustment enables optimal set the view field of camera to all conditions. The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).

Very easy operation by Internet Explorer browser allows the users to convenient and remote support, and also remote management of the camera. Included camera software enables management and integrated monitoring of many network cameras.

For a few models of IP cameras working at $\geq 1920 \times 1080$ resolution we recommend to use of network with 1Gb/s bandwidth.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.8 " Progressive Scan Exmor CMOS
Digital Image Processor:	Texas Instruments DaVinci
Matrix size:	2.0 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 720 - 720p 704 x 576 - D1
Scanning system:	Progressive
Lens:	4.5 ... 135 mm
View angle:	68 ° ... 2.7 ° (manufacturer data) 59 ° ... 2.8 ° (our tests result)
Optical zoom:	x 30
Digital zoom:	x 16
Range of IR illumination:	100 m
S/N ratio:	> 50 dB (AGC off)
Video output:	1 Vpp / 75 Ω
Preset rotation speed:	max. 240 °/s
Rotation speed (manual control):	0.1 °/s ... 160 °/s (horizontal) 0.1 °/s ... 120 °/s (vertical)
Horizontal rotation range:	360 ° continuous

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Vertical rotation range:	-15 ° ... 90 °
RS-485 interface:	✓
Protocols:	Pelco-D, Pelco-P, DH-SD Auto detection
Number of presets:	300
Horizontal scan:	✓
Route settings:	8
Image compression method:	H.264H / H.264B / H.264 / MJPEG
Bitrate:	32 ... 8192 kbps - H.264 320 ... 16384 kbps - MJPEG
Alarm inputs / outputs:	2 / 1
Audio:	<ul style="list-style-type: none"> • External microphone input • Audio output
Main stream frame rate:	1 ... 25 fps - 1080p 1 ... 25 fps - 720p
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	IPv4/ IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x
WEB Server:	Built-in, NVR compliance
Max. number of on-line users:	20
ONVIF:	2.4
Mobile phones support:	<p>Port no.: 37777 or access by a cloud (P2P)</p> <ul style="list-style-type: none"> • Android: Free application DMSS • iOS (iPhone): Free application DMSS <p>There are also paid versions of mobile applications: gDMSS Plus, iDMSS Plus, wDMSS plus</p>
Default IP address:	192.168.1.108
Default admin user / password:	admin / admin
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	<p>rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream</p> <p>rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream</p>
Main features:	<ul style="list-style-type: none"> • ICR - Movable InfraRed filter • IVS Face detect - Face detection function • D-WDR - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • Configurable Privacy Zones - 24 • BLC/HLC - Back Light / High Light Compensation • Sharpness - sharper image outlines • Mirror - Mirror image • Day/Night mode (color/b&w/auto)
Power supply:	24 V AC / 3 A (power adapter included)
Housing:	Speed Dome Metal
Color:	White
Operation temp:	-40 °C ... 50 °C


"Index of Protection":	IP66
Weight:	5.42 kg (with bracket)
Dimensions:	204 x 360 mm x 275 mm (with bracket)
Supported languages:	English, Polish
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION


Bottom view:



Bracket dimensions:

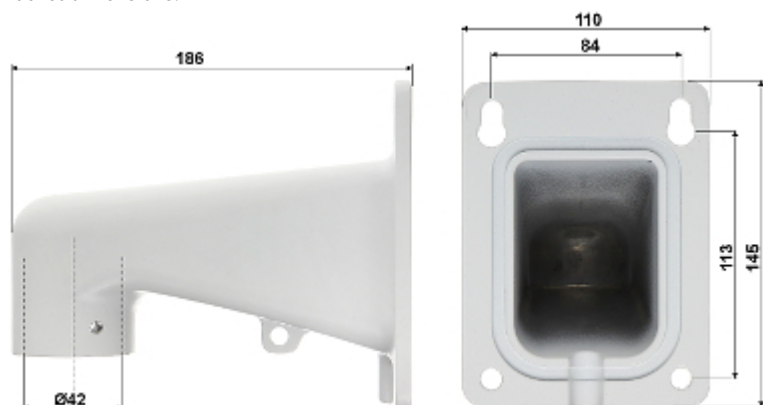

Connectors:

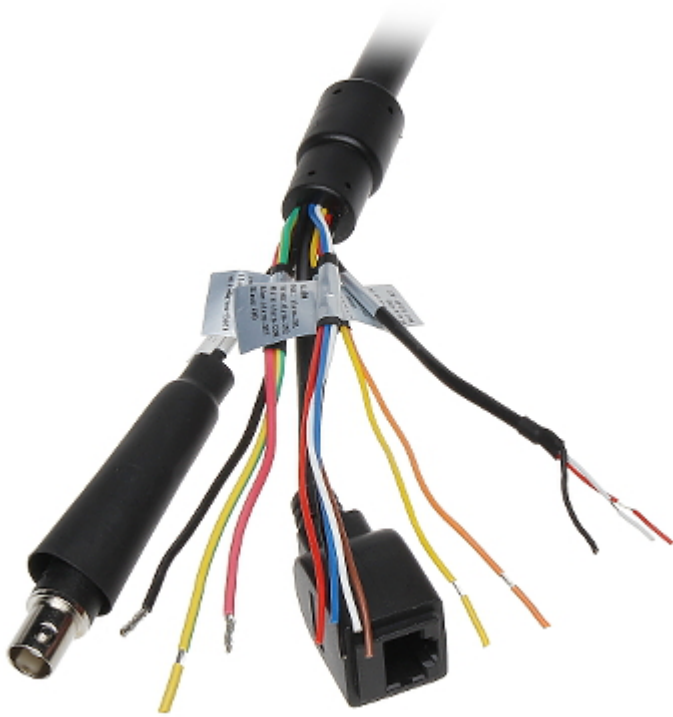

In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):




Camera image at night conditions with internal built-in IR illuminator on:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Camera image at direct strong light opposite to camera:

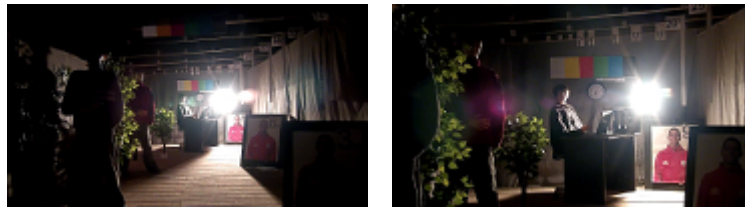

Record from camera during daylight operation:

:

OUR OPINIONS



- The camera is full compatible with DAHUA recorders.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

