

Code: DINB-13820

BUFFERED SWITCHING POWER SUPPLY ADAPTER **DINB-13820**

Net: **121.00 PLN** Gross: **121.00 PLN**

The buffered power supply adapter is designed to powering control panels, sensors, code locks, cameras, consoles, intercoms and other alarm system equipment.

DINB-13820 is designed to mount on the DIN 35 mm rail.




SPECIFICATION

Adapter type:	Switching
Input voltage:	90 ... 264 V AC
Output voltage:	<ul style="list-style-type: none">• 11 ... 13.8 V DC (buffer operation)• 9 ... 13.8 V DC (battery mode)
Max. output current (total):	2.5 A
Battery charging current:	0.5 A
Power:	35 W (max)
Protections:	<ul style="list-style-type: none">• Short-circuit• Overvoltage• Overload• Reverse polarity connection• Discharge
Adapter operation control:	<ul style="list-style-type: none">• AC input voltage presence indication• DC output voltage presence indication• Battery charging indication
Housing type:	Plastic, DIN, TS-35 rail mounting
Weight:	0.32 kg
Dimensions:	122 x 93 x 50 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years

PRESENTATION

Adapter connectors:


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

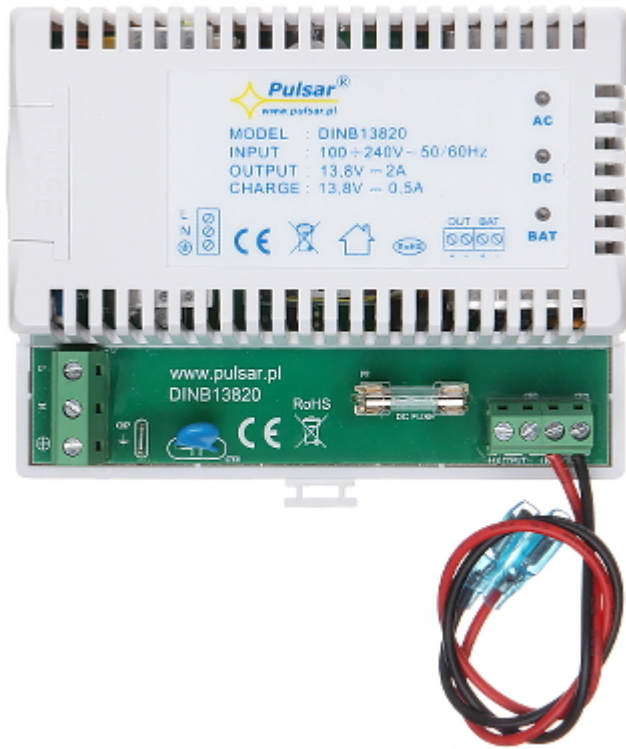

Mounting side view:



Dimensions:

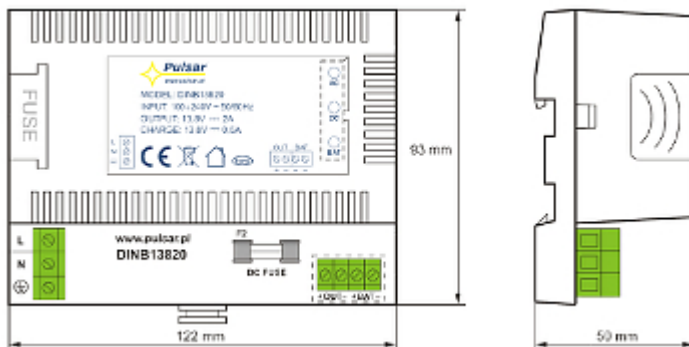

PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

