

Code: ATE-CAM-IPC925

IP MOBILE CAMERA **ATE-CAM-IPC925** - 3.7 Mpx 2.8 mm AUTONE

Net: **59.40 EUR** Gross: **59.40 EUR**

Mobile IP camera equipped with M12, 6-pin - code A connector, providing image in maximum resolution 3.7 Mpx.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.7 " SC2235 CMOS
Matrix size:	3.7 Mpx
Resolution:	2560 x 1440 - 3.7 Mpx , 2304 x 1296 - 3 Mpx , 1920 x 1080 - 1080p , 1280 x 720 - 720p
Lens:	2.8 mm
View angle:	<ul style="list-style-type: none">• 95 ° (manufacturer data)• 87 ° (our tests result)
Range of IR illumination:	10 m
S/N ratio:	≥ 58 dB
RS-485 interface:	—
Memory card slot:	—
Image compression method:	H.265, H.264
Alarm inputs / outputs:	—
Audio:	—
Main stream frame rate:	25 fps @ 3.7 Mpx
ONVIF:	✓
Network interface:	10/100 Base-T - M12, 6-pin socket - Code A
Main features:	<ul style="list-style-type: none">• Motion Detection• Auto White Balance• AGC - Automatic Gain Control• BLC - Back Light Compensation

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Mobile phones support:	—
Default IP address:	Information on the camera and packaging label
Default user password:	Information on the camera and packaging label
Web browser access ports:	8899
PC client access ports:	8899
Power supply:	12 V DC / 600 mA
Power consumption:	≤ 5 W
Housing:	Dome, Metal
Color:	White
"Index of Protection":	IP65
Operation temp:	-20 °C ... 60 °C
Weight:	0.29 kg
Dimensions:	99 x 97 x 57 mm
Supported languages:	English
Manufacturer / Brand:	AUTONE
Guarantee:	2 years


PRESENTATION

Camera view after remove the Dome cover:



Camera mounting dimensions:



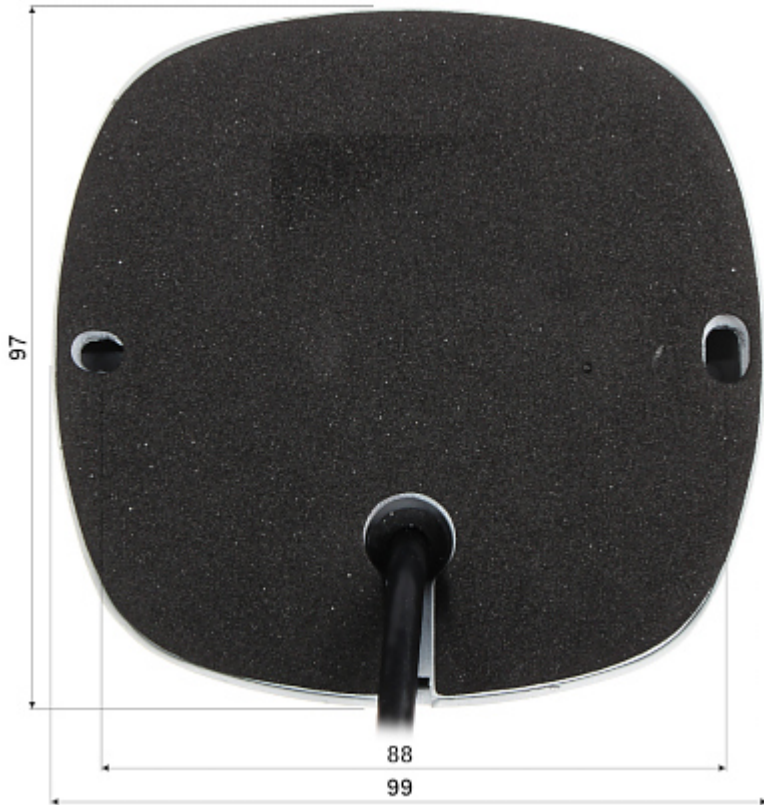

M12 connector:

- 1 DC+
- 2 DC-
- 3 TX+
- 4 TX-
- 5 RX+
- 6 RX-



In the kit:



OUR TESTS

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



OUR OPINIONS



- Very good quality image.
- Solid workmanship.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------