

Code: VTO6210B

VIDEO DOORPHONE **VTO6210B** DAHUA

Net: **806.00 PLN** Gross: **806.00 PLN**

The device works with video doorphones, and other DAHUA panels. Video Doorphone is mounted in a surface housing.
ATTENTION! The device does not support the Dahua analogue system.



SPECIFICATION

Sensor:	1/4 ", 1.0 Mpx CMOS
Image compression method:	H.264
LED illuminator:	✓
Compatibility:	DAHUA
proximity reader built-in:	Access control cards - 13.56 MHz S50
UTP category:	UTP cat. 5e
Main features:	• Doorbell button, • Bidirectional communication, • Microphone built-in, • Speakers built-in, • Tamper detection - removing from mounting surface
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS There are also other versions of mobile applications: gDMSS Plus, iDMSS Plus
Power supply:	• 12 V DC / 830 mA, • 24 V PoE - DAHUA
Housing:	Plastic / Tempered glass, Waterproof
"Index of Protection":	IP65 - after additional sealing the housing connection with the mounting surface, e.g. with silicone
Color:	Black
Operation temp:	-30 °C ... 60 °C

Weight:	0.37 kg
Dimensions:	154 x 114 x 43 mm
Supported languages:	English, Bulgarian, Czech, Finnish, Polish, Slovenian, Slovak, Hungarian
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front view:



Rear view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Connectors view:




Connectors description:



Examples of connection diagrams:

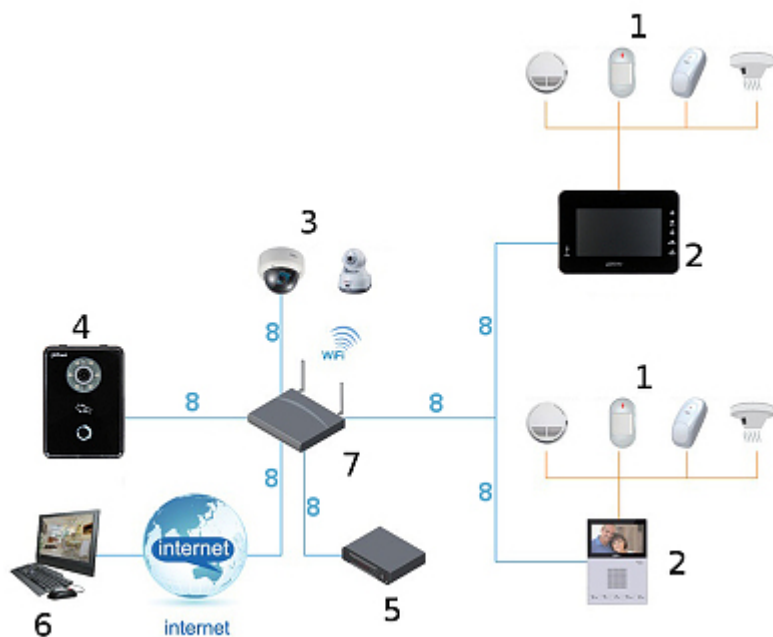

1. Detectors (smoke/gas/heat/PIR)
 2. INDOOR PANEL
 3. IP cameras
 4. Video doorphone
 5. DVR
 6. Remote client
 7. Router WiFi
 8. UTP cat. 5e
- In the kit:

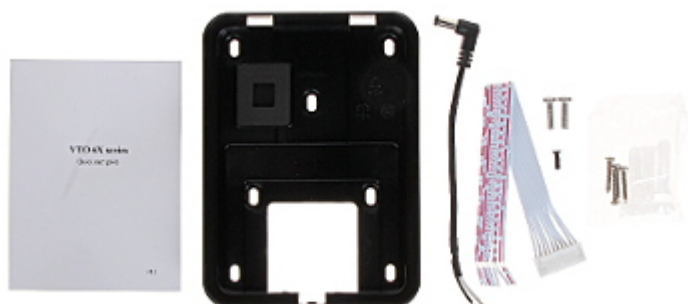

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------