

Code: VTO1220BW

## VIDEO DOORPHONE **VTO1220BW** DAHUA

Net: **344.99 GBP** Gross: **344.99 GBP**



Video Doorphone is mounted in a flush-mounted housing.  
ATTENTION! The device does not support the Dahua analogue system.

### SPECIFICATION

Sensor:	1/3 ", 1.3 Mpx CMOS
Lens:	3.6 mm
View angle:	95 °
Display:	3.5 " TFT LCD, 320 x 240 px
Image compression method:	H.264
LED illuminator:	✓
Compatibility:	DAHUA
RS-485:	✓
UTP category:	UTP cat. 5e
Main features:	<ul style="list-style-type: none"><li>• proximity reader built-in - 13.56 MHz S50,</li><li>• Touch control keys,</li><li>• LCD display,</li><li>• Bidirectional communication,</li><li>• Microphone built-in,</li><li>• Speakers built-in,</li><li>• Tamper detection - removing from mounting surface ,</li></ul>
Operation temp:	-40 °C ... 60 °C
Power supply:	12 V DC / 0.83 A
Power consumption:	≤ 10 W
Housing:	Tempered glass
Color:	White

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

"Index of Protection":	IP65
Weight:	1.09 kg
Dimensions:	408 x 150 x 77 mm
Supported languages:	English, Bulgarian, Czech, Finnish, Polish, Slovenian, Slovak, Hungarian
Manufacturer / Brand:	DAHUA
Guarantee:	<b>3 years</b>

## PRESENTATION

Front view:



Rear view:






Connectors:



Examples of connection diagrams:



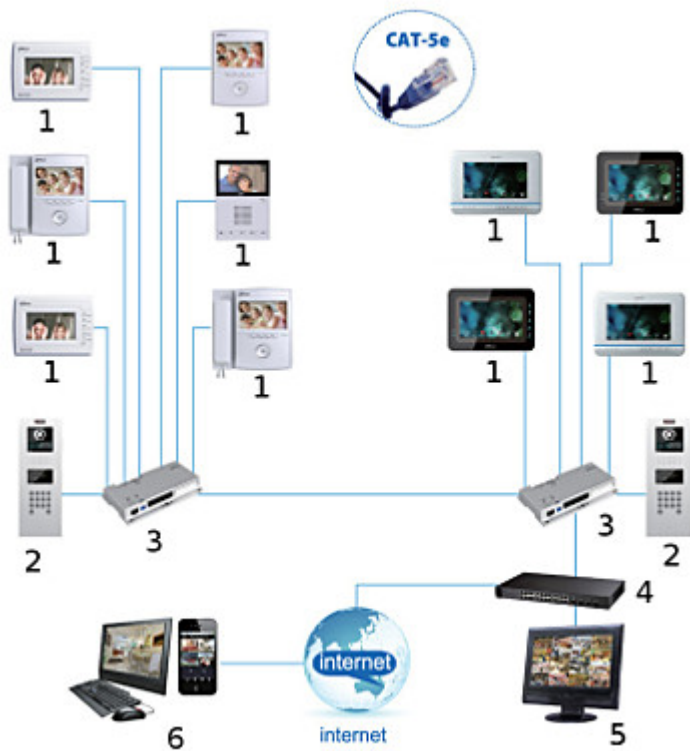

- 1. INDOOR PANEL
  - 2. VIDEO DOORPHONE
  - 3. DHI-VTNS1060A
  - 4. Switch
  - 5. System management center
  - 6. Remote client
- In the kit:



**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------