

Code: VTO4202F-P-S2

VIDEO DOORPHONE **VTO4202F-P-S2** DAHUA

Net: **294.13 EUR** Gross: **294.13 EUR**



The module is designed for installation in DAHUA VTM12x series housings.

Attention! When selecting 2-wire devices, check the compatibility list available at the bottom of the page in the "files" section.

It is a hybrid module - it can work in a 2-Wire installation or as a standard IP video doorphone.

SPECIFICATION

Sensor:	2 Mpx CMOS
Lens:	1.9 mm
View angle:	160 °
proximity reader built-in:	—
Image compression method:	H.265
LED illuminator:	—
IR illuminator:	✓
Compatibility:	DAHUA
RS-485:	✓
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Main features:	<ul style="list-style-type: none">• Bidirectional communication,• Microphone built-in,• Speakers built-in• WDR - 120 dB - Wide Dynamic Range,• 3D-DNR - Digital Noise Reduction,• Power output : 12 V DC / 100 mA,• Tamper detection - removing from mounting surface ,
Power supply:	<ul style="list-style-type: none">• PoE (802.3af),• 2-Wire IP interface
Power consumption:	≤ 12 W



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Housing:	Aluminum
Color:	Silver
"Index of Protection":	IP65 - after additional sealing the housing connection with the mounting surface, e.g. with silicone
IK rating:	IK07
Operation temp:	-30 °C ... 60 °C
Weight:	0.28 kg
Dimensions:	100 x 100 x 49.3 mm
Supported languages:	Polish, English
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION



Front view:




Rear view:




Connectors:



Memory card slot and "Reset" button:

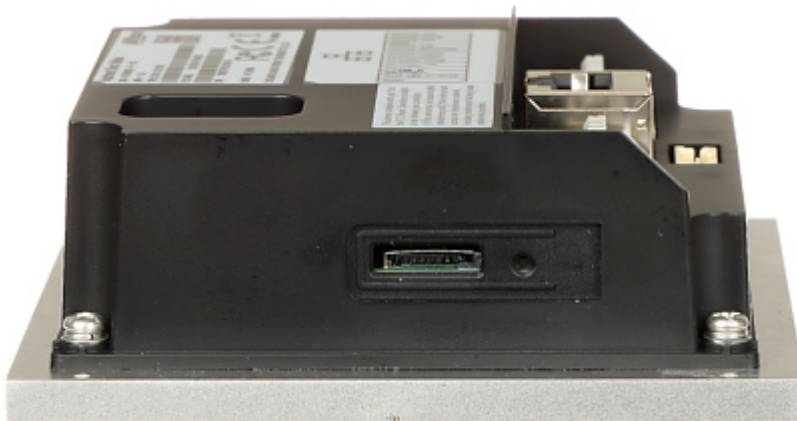

Dimensions:

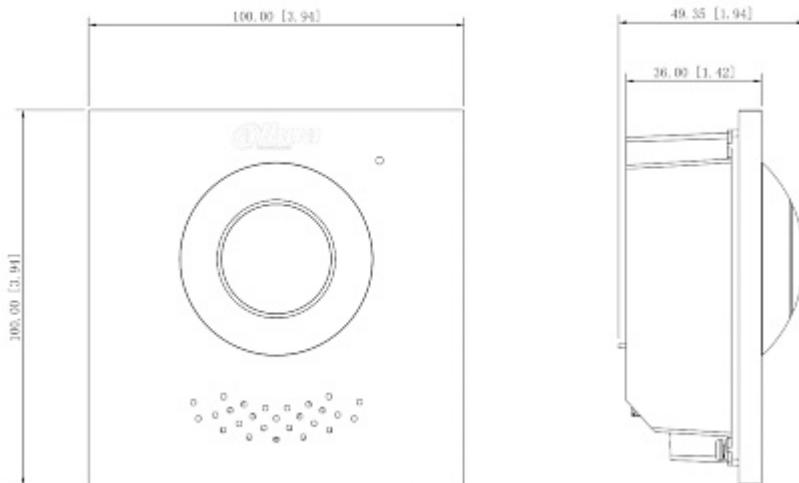

In the kit:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

