

Code: VTO2211G-WP-S2

WIRELESS VIDEO DOORPHONE **VTO2211G-WP-S2** Wi-Fi / IP DAHUA

Net: 1 342.00 PLN Gross: 1 342.00 PLN



The Wi-Fi / IP Video Doorphone allows to remote control of the electromagnetic lock using smartphone or tablet. The device transmits an image and operates as intercom system with selected mobile device, and also records the data to the smartphone / tablet.

The function of the monitor with the option of opening the door can be performed by a mobile device, such as a smartphone or tablet.

Attention! To play back recordings from the memory card installed in the VTO2211G-WP-S2, the VTH monitor is required.

Video Doorphone is mounted in a surface housing.

SPECIFICATION

The number of subscribers served:	1
Sensor:	2.1 Mpx
Resolution:	Main stream : 720p - 1280 x 720 , Sub stream : 1080p - 1920 x 1080
Camera view angle:	125 °
IR illuminator:	✓
LED illuminator:	—
PIR detector:	—
proximity reader built-in:	Access control cards - 13.56 MHz S50
Wireless transmission range:	The range limited only by the availability of the Wi-Fi network
Wi-Fi standard:	IEEE 802.11b / IEEE 802.11g / IEEE 802.11n
Network interface:	• Ethernet 10 / 100 Mbps • Wi-Fi
RS-485 interface:	✓
Video output:	—
Image compression method:	H.265 / H.264
Supported audio formats:	G.711, PCM
Alarm inputs:	1 pcs

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Alarm outputs:	1 pcs
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Main features:	<ul style="list-style-type: none"> • It can only work with the mobile application, without the VTH monitor, • The function of the monitor with the ability to open the door can be a smartphone, tablet or the VTH indoor panel • Motion Detection, • WDR - 120 dB - Wide Dynamic Range, • 3D-DNR - Digital Noise Reduction, • Bidirectional communication, • Microphone built-in, • Speakers built-in, • Tamper detection - opening the enclosure, • Door contact and request button for exit inputs, • Micro SD memory cards up to 256GB support (possible local recording), • Full support via network : WiFi / LAN, • Video Doorphone is mounted in a surface housing • Power output : 12 V DC / 200 mA
Power supply:	<ul style="list-style-type: none"> • PoE (802.3af) • 12 V DC / 590 mA (max)
Power consumption:	≤ 7 W (operation)
Housing:	Plastic
Mount:	Surface-mounted
Color:	Black + Gray
"Index of Protection":	IP65 - after additional sealing the housing connection with the mounting surface, e.g. with silicone
Operation temp:	-30 °C ... 60 °C
Weight:	0.26 kg
Dimensions:	100 x 150 x 25 mm
Supported languages:	Polish, English, Bulgarian, Czech, Finnish, Slovenian, Slovak, Hungarian
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front panel:





DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Rear view:




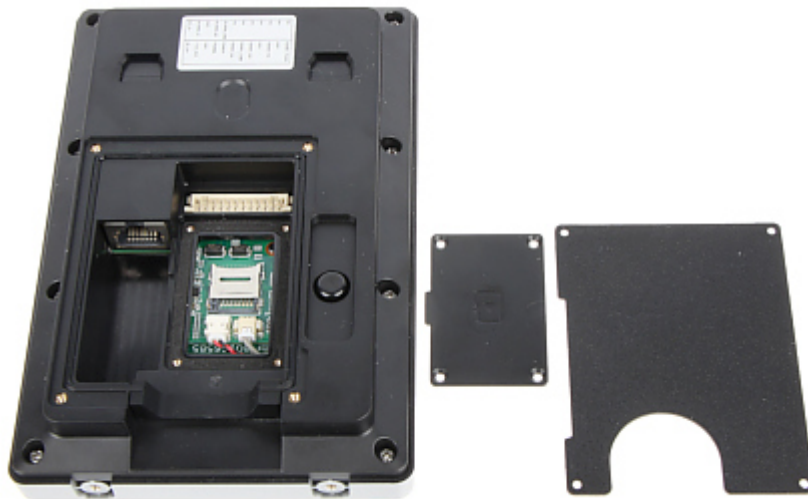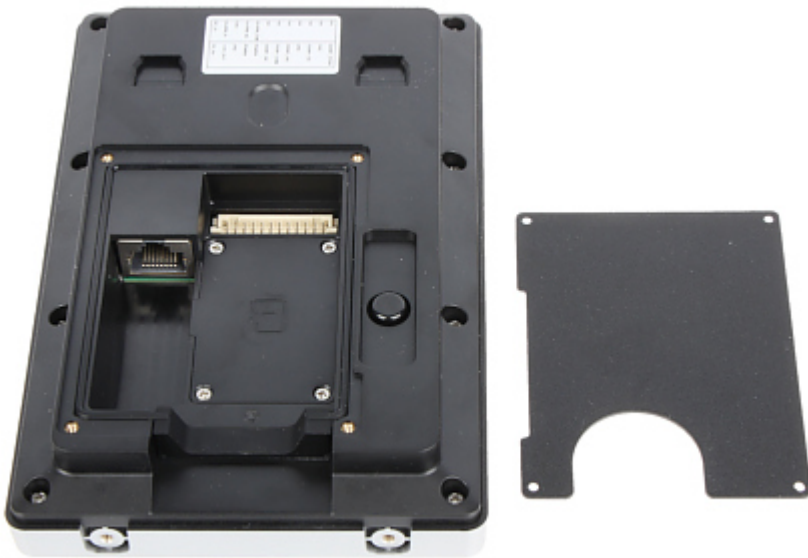

Connectors:



In the kit:

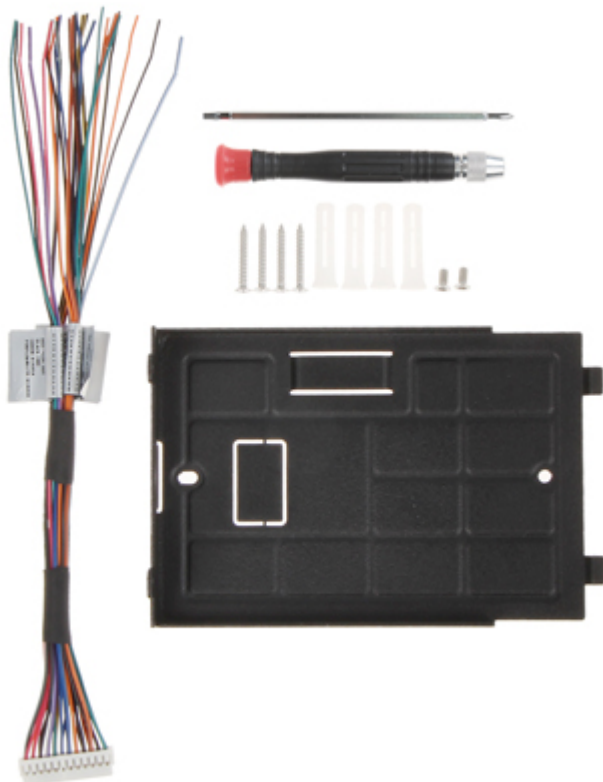

OUR OPINIONS



- Very easy installation.



- Despite leading out the connectors on the cable, the second relay output is inactive. The second transition can be controlled only from the DEE1010B relay.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60