

Code: DS-KIS203

## VIDEO DOORPHONE KIT **DS-KIS203** Hikvision

Net: **661.00 PLN** Gross: **661.00 PLN**

Video Doorphone set of the Hikvision brand with a door station mounted in a surface housing and a 7" colored screen. The DS-KIS203 doesn't need any additional configuration (after connecting according to the diagram the device is ready to operate).

ATTENTION! The device does not support the HIKVISION IP system.



### SPECIFICATION

DOOR STATION:	
Sensor:	1/4 " CMOS
IR illuminator:	✓
proximity reader built-in:	—
Video output:	1 Vpp, CVBS - pair of wires compatible with HIKVISION analog video door-phone system
Operation temp:	-30 °C ... 70 °C
Power supply:	12 V DC
Power consumption:	≤ 5 W (operation)
Main features:	<ul style="list-style-type: none"><li>• Relay output</li><li>• 4-wire cable installation : 5 m (included)</li></ul>
Housing:	Metal, Waterproof
Color:	Graphite
"Index of Protection":	IP65
Weight:	0.46 kg
Dimensions:	145 x 49 x 27 mm
INDOOR PANEL:	
Shield:	7 " TFT-LCD color matrix
Resolution:	800 x 480
Main features:	<ul style="list-style-type: none"><li>• Plug &amp; Play,</li><li>• Ultra-flat hands-free monitor, with speakerphone,</li><li>• Smooth volume control,</li><li>• Microphone built-in,</li><li>• Speakers built-in,</li><li>• Bidirectional communication</li></ul>
Power supply:	12 V DC
Max. current:	420 mA
Power consumption:	≤ 5 W

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Operation temp:	-10 °C ... 55 °C
Weight:	0.278 kg
Dimensions:	196 x 133 x 18 mm
Manufacturer / Brand:	Hikvision
SAP Code:	305300749
Guarantee:	<b>3 years</b>

## PRESENTATION

Door station:  
Front view:



Side view:






Mounting side view:



Connectors:

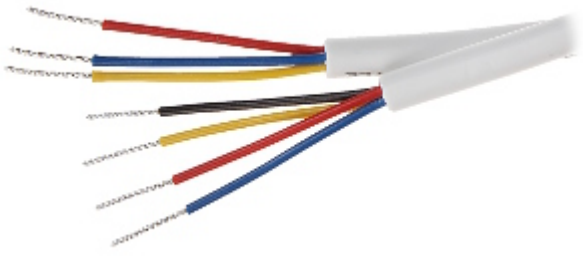

Connectors description:



INDOOR PANEL:

Front view:



Rear view:




Connectors:



Do not connect the power wire of the four-core cable to the V1/V2 pin (video wire) or A1/A2 pin (audio wire) of the four-wire interface.


B1+	V1	A1	G	B2+	V2	A2	G	CAM	G
B1+	V1	A1	G	B2+	V2	A2	G	+12V	G

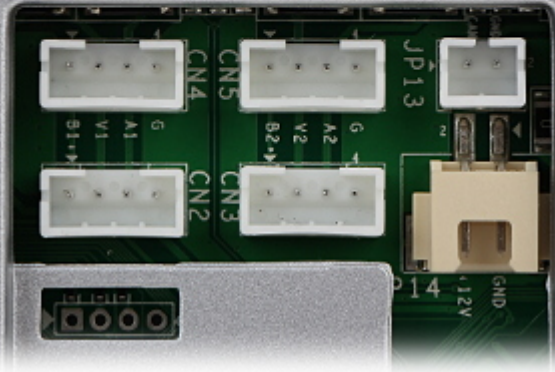

Volume adjustment:



In the kit:

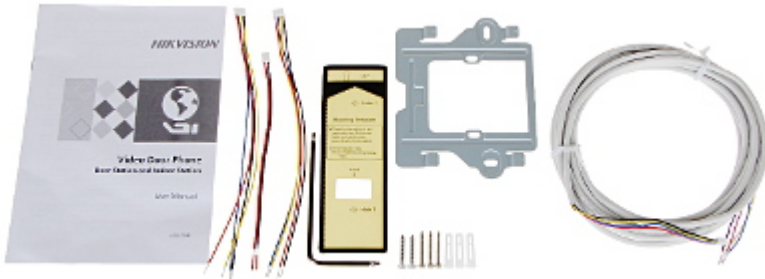

## PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

