

Code: DS-KV8402-IM

## VIDEO DOORPHONE **DS-KV8402-IM** Hikvision

Net: **266.86 EUR** Gross: **266.86 EUR**

The device cooperates with video doorphones, and other panels working in Hikvision IP standard.



### SPECIFICATION

|                            |                                                                                                                                                                                                                                                                                                                                 |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sensor:                    | 1.3 Mpx CMOS                                                                                                                                                                                                                                                                                                                    |
| LED illuminator:           | —                                                                                                                                                                                                                                                                                                                               |
| IR illuminator:            | ✓                                                                                                                                                                                                                                                                                                                               |
| Compatibility:             | Hikvision IP Video Doorphones                                                                                                                                                                                                                                                                                                   |
| proximity reader built-in: | Access control cards - 13.56 MHz S50                                                                                                                                                                                                                                                                                            |
| UTP category:              | UTP cat. 5e                                                                                                                                                                                                                                                                                                                     |
| Alarm inputs:              | 4 pcs                                                                                                                                                                                                                                                                                                                           |
| Relay outputs:             | 1 pcs NO/NC                                                                                                                                                                                                                                                                                                                     |
| RS-485:                    | ✓                                                                                                                                                                                                                                                                                                                               |
| Ethernet:                  | 1 x RJ-45 - 10/100 Base-T                                                                                                                                                                                                                                                                                                       |
| Main features:             | <ul style="list-style-type: none"><li>• 4 x Doorbell button,</li><li>• Bidirectional communication,</li><li>• Microphone built-in,</li><li>• Speakers built-in,</li><li>• Tamper detection - removing from mounting surface,</li><li>• Ability to work with reed switch and signalling the door being opened too long</li></ul> |
| Operation temp:            | -40 °C ... 70 °C                                                                                                                                                                                                                                                                                                                |
| Power supply:              | <ul style="list-style-type: none"><li>• 12 V DC / 1 A,</li><li>• 24 V PoE</li></ul>                                                                                                                                                                                                                                             |
| Housing:                   | Aluminum / Plastic, Waterproof                                                                                                                                                                                                                                                                                                  |

|                        |                                     |
|------------------------|-------------------------------------|
| "Index of Protection": | IP65                                |
| Color:                 | Silver                              |
| Weight:                | 0.52 kg                             |
| Dimensions:            | 182 x 100 x 33 mm                   |
| Supported languages:   | Polish, English, Serbian, Hungarian |
| Manufacturer / Brand:  | Hikvision                           |
| SAP Code:              | 305300113                           |
| Guarantee:             | <b>3 years</b>                      |

## PRESENTATION


Front view:



Rear view:




Connectors view:

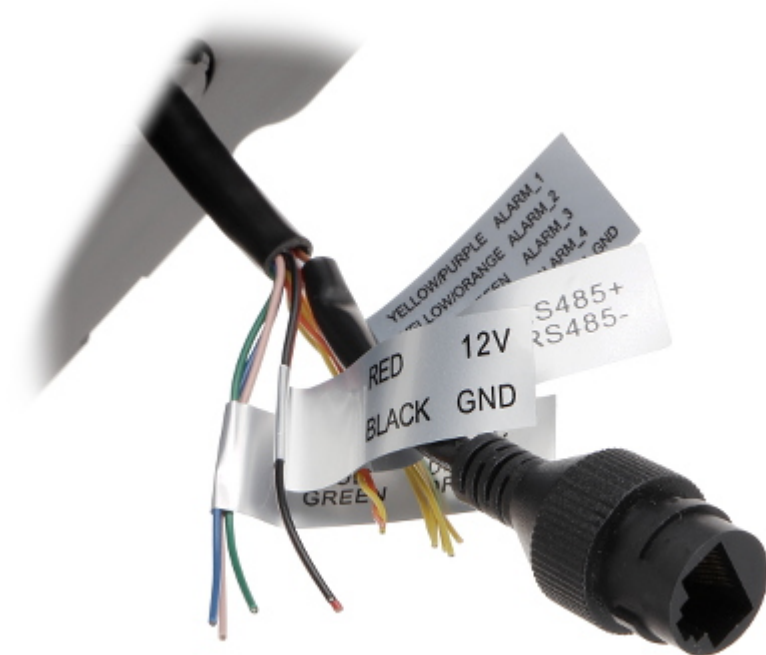

Connectors description:



Examples of connection diagrams:

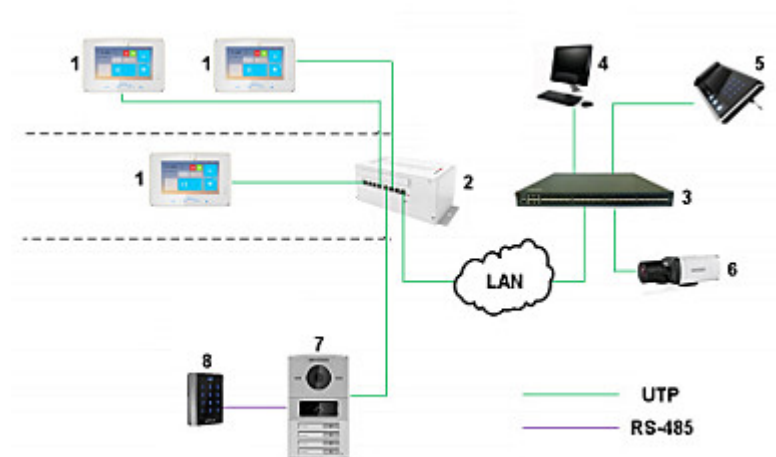

1. INDOOR PANEL
2. Switch dedicated to intercom systems
3. Switch
4. Remote client
5. System management center
6. IP cameras
7. Video doorphone
8. Reader with keypad

In the kit:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60