

Code: DS-KIS701-B-D

VIDEO DOORPHONE KIT **DS-KIS701-B-D** Hikvision

Net: **2 190.00 PLN** Gross: **2 190.00 PLN**

Two-wire HIKVISION video doorphones system with 7" touch monitor and controller enabling connection and supply of up to 9 groups of devices. Video Doorphone is mounted in a flush-mounted housing.

The device has the ability to work with the [Hik-Connect](#) application for mobile devices.

The attached DS-KAD709 controller also enables the connection of the video doorphone system to the LAN network and via it to the Internet.



SPECIFICATION

Sensor:	2.1 Mpx CMOS
Image compression method:	H.264
LED illuminator:	—
IR illuminator:	✓
Compatibility:	HIKVISION 2-wire Video Doorphones
Main features:	<ul style="list-style-type: none">• Doorbell button,• Bidirectional communication,• Microphone built-in,• Speakers built-in,• Tamper detection - removing from mounting surface,• LEDs for system state indication and user interface display,• Door contact and request button for exit inputs,• The device has the ability to work with the Hik-Connect application for mobile devices,• Relay output NO/NC
Operation temp:	-30 °C ... 60 °C
Power supply:	24 V DC - via DS-KAD709
Housing:	Metal, Waterproof
Color:	Silver
"Index of Protection":	IP65
Weight:	0.79
Dimensions:	169 x 110 x 52

INDOOR PANEL:

Shield:	7 " - capacitive touch screen
Resolution:	1024 x 600
Internal memory:	—
Memory card slot:	Micro SD memory cards up to 32GB support (possible local recording)
Mobile phones support:	<ul style="list-style-type: none">• Android: Free application Hik-Connect• iOS (iPhone): Free application Hik-Connect
Default administrator password:	888999

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Main features:	<ul style="list-style-type: none"> • Microphone built-in, • Speakers built-in, • Bidirectional communication, • Smooth adjustment of monitor parameters: image brightness, ring tone volume and conversation volume, • Automatically capture and save images if there is no response to the doorbell, • Support for capturing a photo during video calls, • Register a short voice message if there is no response to the bell button, • Full support via network, • LEDs for system state indication and user interface display, • Possibility to connect up to 3 compatible devices (door stations, internal panels, KAD-709 controller), • IP Hikvision cameras support
Controlling:	One-touch action buttons + capacitive touch screen
Alarm inputs:	—
Power supply:	24 V DC - via DS-KAD709
Color:	Black
Weight:	0.512 kg
Dimensions:	196 x 133 x 21 mm

ENCLOSURE:

Housing type:	Flush-mounted
Material:	Metal
Color:	Black
Internal dimensions:	160 x 101 x 37 mm
External dimensions:	162 x 103 x 38 mm

Controller:

Network interface:	RJ45 - 10/100 Base-T
Number of supported devices:	max. 9 pcs
Device powering:	✓
Power supply:	24 V DC (power adapter included)
Housing:	Plastic, DIN, TS-35 rail mounting
Color:	White
Weight:	0.20
Dimensions:	110 x 112 x 66

General information:

Supported languages:	Polish, English, Czech, French, Spanish, Dutch, German, Romanian, Hungarian, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	305301532
Guarantee:	3 years

PRESENTATION

INDOOR PANEL:






Mounting side view:



Connectors:

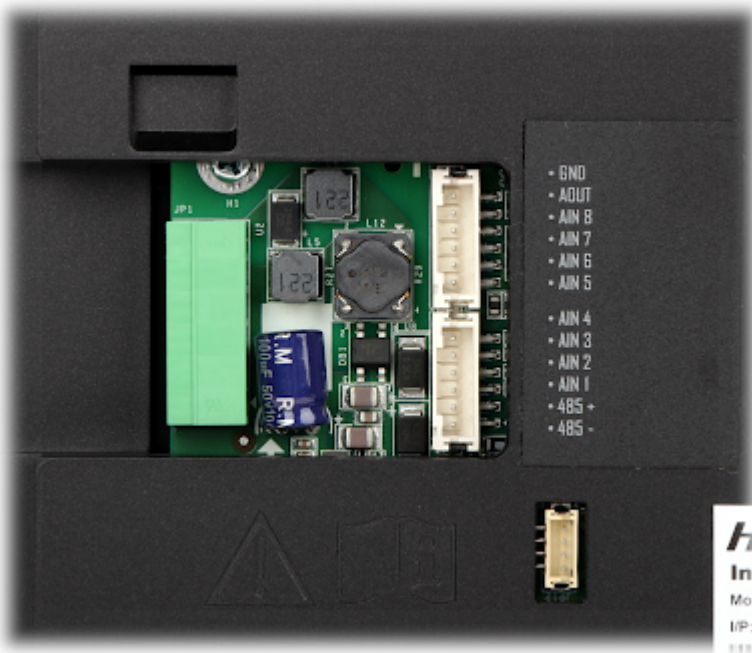

Memory card slot:



Video doorphone:



Mounting side view:




Connectors:



Controller:



Mounting side view:

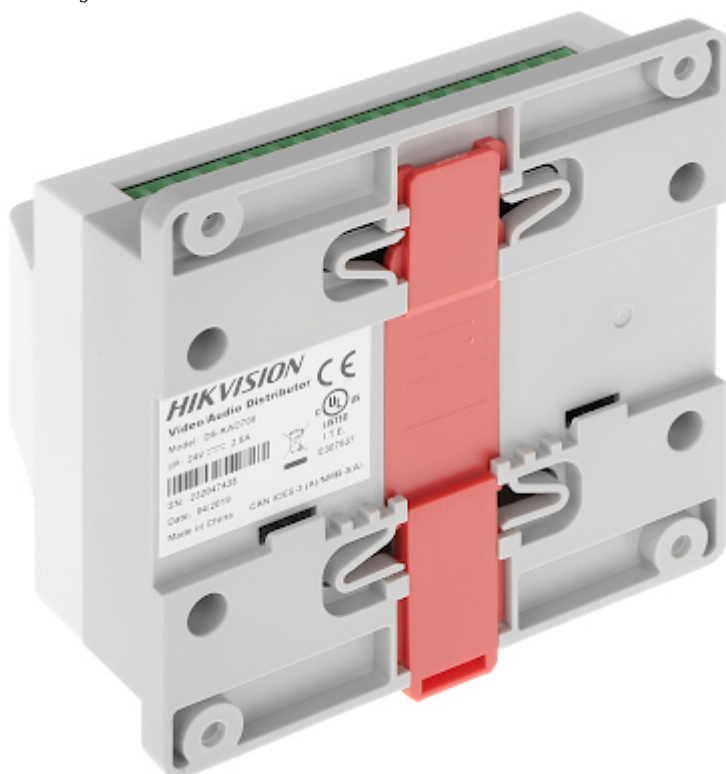

Connectors:



Power adapter:




Mounting side view:



Connectors:



Examples of connection diagrams:

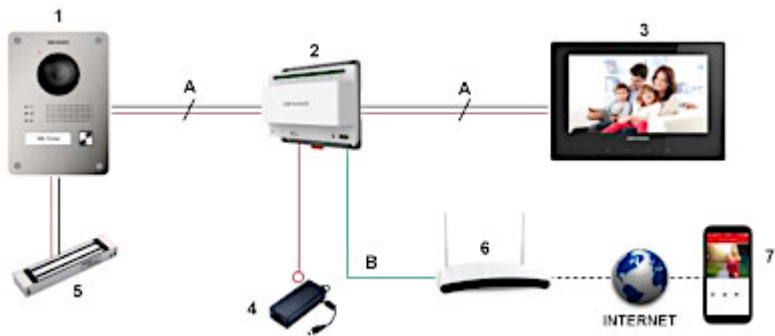

1. Video doorphone
 2. Controller
 3. INDOOR PANEL
 4. 24V DC power adapter
 5. Electromagnetic Lock
 6. Router
 7. Remote client
- A 1-pair cable
 B UTP cat. 5
 In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------