

Code: DS-KIS702Y

VIDEO DOORPHONE KIT **DS-KIS702Y** Hikvision

Net: 2 299.00 PLN Gross: 2 299.00 PLN

Two-wire HIKVISION video doorphone system with 7" touch monitor and controller equipped with 4 2-wire buses. Video Doorphone is mounted in a surface housing.

The device has the ability to work with the [Hik-Connect](#) application for mobile devices.

The attached DS-KAD704Y controller also enables the connection of the video doorphone system to the LAN network and via it to the Internet.



SPECIFICATION

Compatibility:	HIKVISION 2-wire - Y series
Doorbell button:	1 pcs
Sensor:	2.1 Mpx CMOS
Camera resolution:	1920 x 1080 - 1080p
Camera view angle:	146 °
Image compression method:	H.264
IR illuminator:	✓
Network protocols:	TCP/IP, RTSP, SIP
Alarm inputs:	4 pcs
Relay outputs:	2 x NO/NC
Main features:	• True WDR - Wide Dynamic Range, • DNR - Digital Noise Reduction, • BLC - Back Light Compensation, • Motion Detection, • Bidirectional communication, • Microphone built-in, • Speakers built-in, • Noise suppression and echo cancellation, • Tamper detection - removing from mounting surface
Power supply:	• 24 V DC - HIKVISION 2-wire
Power consumption:	< 4 W
Operation temp:	-40 °C ... 60 °C
Housing:	Metal + Plastic
Color:	Black
"Index of Protection":	IP65
Weight:	0.38 kg

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions:	100 x 98 x 44 mm
-------------	------------------

INDOOR PANEL:

Compatibility:	HIKVISION 2-wire - Y series
Shield:	7 " - capacitive touch screen
Resolution:	1024 x 600
Internal memory:	128 MB (built-in)
Main features:	• Wi-Fi module - IEEE 802.11 b/g/n, • Microphone built-in, • Speakers built-in, • Bidirectional communication, • Smooth adjustment of monitor parameters: image brightness, ring tone volume and conversation volume, • Automatically capture and save photos if there is no response to the bell button, • IP Hikvision cameras support, • The ability of direct communication between two or more panels, • Register a short voice message if there is no response to the bell button • Support for capturing a photo during video calls • The microSD - max. 128 GB cards support - 16 GB included, • The device is fully configurable via the iVMS4200 software. • In addition, the device has the ability to work with the Hik-Connect application on mobile devices
Controlling:	capacitive touch screen
Default administrator password:	— The administrator password should be set at the first start
Default password for securing the zone:	—
Alarm inputs:	8
Alarm outputs:	2
Power supply:	24 V DC - HIKVISION 2-wire
Power consumption:	≤ 4 W
Color:	Black + Silver
Operation temp:	-10 °C ... 50 °C
Weight:	0.32 kg
Dimensions:	200 x 140 x 25 mm

ENCLOSURE:

Number of mounted modules:	1 pcs
Material:	Aluminum
Color:	Graphite
Weight:	0.22 kg
External dimensions:	117 x 107 x 37 mm

Switch:

Number of ports:	6 x HIKVISION 2-wire (4 x device, 2 x Possibility to connecting in cascade) , 1 x RJ-45
Compatibility:	HIKVISION 2-wire - Y series
Main features:	DIN, TS-35 rail mounting
Power supply:	24 V DC
Housing:	Plastic
Operation temp:	-10 °C ... 55 °C
Weight:	0.25 kg
Dimensions:	144 x 90 x 66 mm




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

General information:

Supported languages:	Polish, English, Bulgarian, Croatian, Czech, French, Greek, Spanish, Dutch, German, Portuguese, Romanian, Serbian, Hungarian, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	305303992
Guarantee:	3 years

PRESENTATION

INDOOR PANEL:

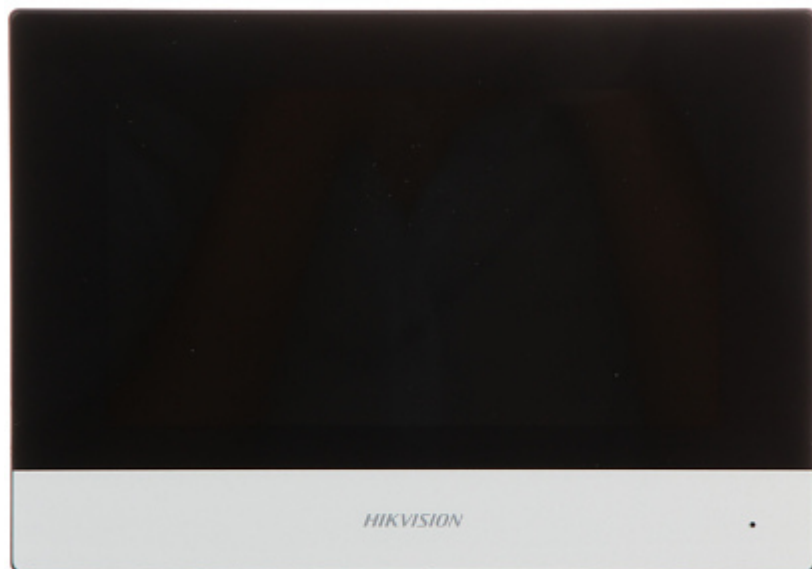

Mounting side view:



Connectors:



Memory card slot:



VIDEO DOORPHONE:



Mounting side view:



Connectors:



SWITCH :



Top view:



Mounting side view:



Power adapter:





Mounting side view:



Connectors:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------