

Code: DS-KIS603-P(C)

VIDEO DOORPHONE KIT **DS-KIS603-P(C)** Hikvision

Net: **329.58 EUR** Gross: **329.58 EUR**

HIKVISION video doorphone set with 7" touch monitor and with the possibility of integration with both the alarm system and video monitoring. Video Doorphone is mounted in a surface housing.



SPECIFICATION

Compatibility:	IP Hikvision video doorphones II generation
Sensor:	2 Mpx
Resolution:	1920 x 1080
Camera view angle:	131 °
IR illuminator:	✓
LED illuminator:	—
PIR detector:	—
Doorbell button:	1 pcs
proximity reader built-in:	13.56 MHz S50
Wireless transmission range:	The range limited only by the availability of the Wi-Fi network
Wi-Fi standard:	IEEE 802.11b / IEEE 802.11g / IEEE 802.11n
Network interface:	<ul style="list-style-type: none">• Ethernet• Wi-Fi
RS-485 interface:	✓
Video output:	—
Video format:	H.264
Supported audio formats:	G.711
Alarm inputs:	4 pcs
Main features:	<ul style="list-style-type: none">• Bidirectional communication,• Full support via network : WiFi / LAN,• Tamper detection - removing from mounting surface,• Video Doorphone is mounted in a surface housing• The device has the ability to work with the Hik-Connect application for mobile devices, without the use of an internal panel

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Power supply:	<ul style="list-style-type: none"> • PoE (802.3af) • 12 V DC / 830 mA (max)
Power consumption:	< 10 W
Housing:	Plastic
Mount:	Surface-mounted
Color:	Black + Gray
"Index of Protection":	IP65
Operation temp:	-40 °C ... 55 °C
Weight:	0.19 kg
Dimensions:	65 x 138 x 30 mm

INDOOR PANEL:

Compatibility:	IP Hikvision modular video doorphones
Shield:	7 " - capacitive touch screen
Resolution:	1024 x 600
Internal memory:	128 MB (built-in)
Main features:	<ul style="list-style-type: none"> • Wi-Fi Module - IEEE 802.11 b/g/n, • Microphone built-in, • Speakers built-in, • Bidirectional communication, • Smooth adjustment of monitor parameters: image brightness, ring tone volume and conversation volume, • Automatically capture and save photos if there is no response to the bell button, • IP Hikvision cameras support, • The ability of direct communication between two or more panels, • Register a short voice message if there is no response to the bell button • Support for capturing a photo during video calls • The microSD cards support max. 32 GB • The device is fully configurable via the ivMS4200 software. • In addition, the device has the ability to work with the Hik-Connect application on mobile devices
Controlling:	capacitive touch screen
Default administrator password:	— The administrator password should be set at the first start
Default password for securing the zone:	—
Alarm inputs:	8
Alarm outputs:	2
Power supply:	<ul style="list-style-type: none"> • PoE (802.3af), • 12 V DC
Power consumption:	≤ 6 W
Color:	Black + Silver
Operation temp:	-10 °C ... 55 °C
Weight:	0.34 kg
Dimensions:	200 x 140 x 25 mm


General information:

Supported languages:	Polish, English, Bulgarian, Croatian, Czech, French, Greek, Spanish, Dutch, German, Portuguese, Romanian, Serbian, Hungarian, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	305303632
Guarantee:	3 years



PRESENTATION

INDOOR PANEL:

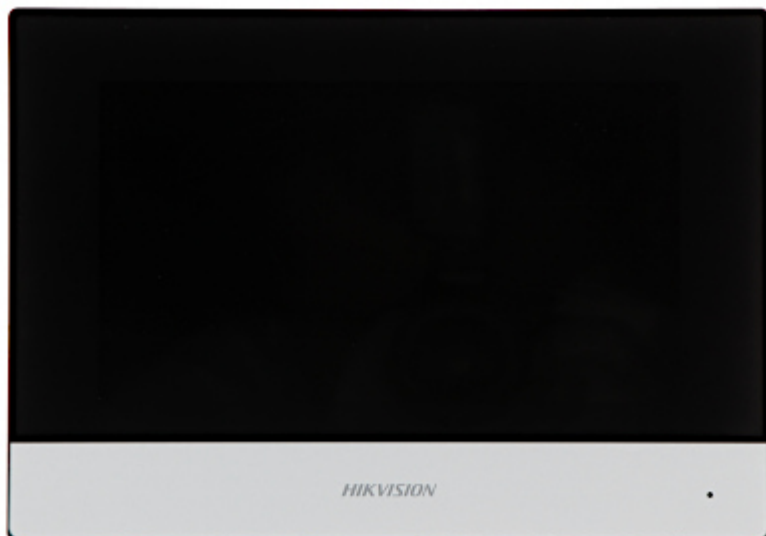

Mounting side view:




Connectors:




Memory card slot:



VIDEO DOORPHONE:

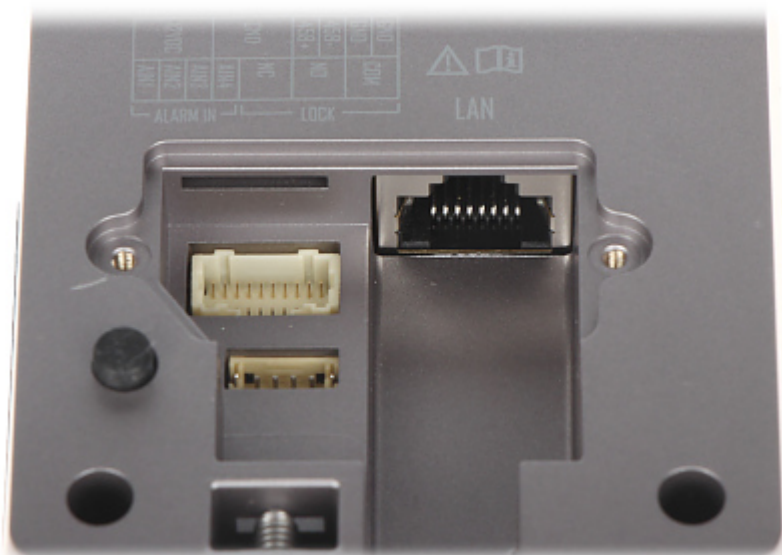

Dimensions:

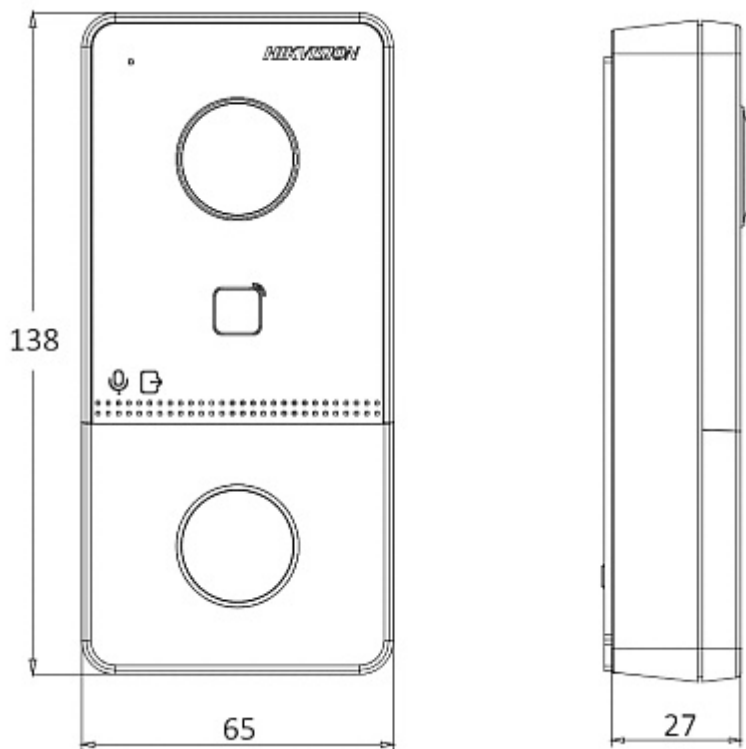

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------