

Code: UT-803

LABORATORY METER **UT-803** UNI-T

Net: **785.36 PLN** Gross: **785.36 PLN**

The UT-803 is a digital laboratory meter used to measure: voltage, current, resistance, capacity, frequency, temperature and to check the correct operation of diodes.



SPECIFICATION

DC voltage measurement:	• $600\text{ mV} \pm (0.6\% + 2)$ @ 0.1 mV, • $6\text{ V} \pm (0.3\% + 2)$ @ 0.001 V, • $60\text{ V} \pm (0.3\% + 2)$ @ 0.01 V, • $600\text{ V} \pm (0.3\% + 2)$ @ 0.1 V, • $1000\text{ V} \pm (0.5\% + 3)$ @ 1 V
AC voltage measurement:	• 600 mV @ 0.1 mV : $\pm (0.6\% + 5)$ @ $40\text{ Hz} \dots 50\text{ kHz}$ $\pm (1.0\% + 5)$ @ $50\text{ kHz} \dots 100\text{ kHz}$ • 6 V @ 0.001 V : $\pm (0.6\% + 5)$ @ $40\text{ Hz} \dots 1\text{ kHz}$ $\pm (1.0\% + 5)$ @ $1\text{ kHz} \dots 10\text{ kHz}$ $\pm (3.0\% + 5)$ @ $10\text{ kHz} \dots 100\text{ kHz}$ • 60 V @ 0.01 V : $\pm (0.6\% + 5)$ @ $40\text{ Hz} \dots 1\text{ kHz}$ $\pm (1.5\% + 5)$ @ $1\text{ kHz} \dots 10\text{ kHz}$ $\pm (3.0\% + 5)$ @ $10\text{ kHz} \dots 20\text{ kHz}$ $\pm (8.0\% + 5)$ @ $20\text{ kHz} \dots 100\text{ kHz}$ • 600 V @ 0.1 V : $\pm (0.6\% + 5)$ @ $40\text{ Hz} \dots 1\text{ kHz}$ $\pm (3.5\% + 5)$ @ $1\text{ kHz} \dots 10\text{ kHz}$ • 1000 V @ 1 V : $\pm (1.2\% + 3)$ @ $40\text{ Hz} \dots 1\text{ kHz}$ $\pm (3.0\% + 3)$ @ $1\text{ kHz} \dots 3\text{ kHz}$
DC current measurement:	• $600\text{ }\mu\text{A} \pm (0.5\% + 3)$ @ $0.1\text{ }\mu\text{A}$, • $6000\text{ }\mu\text{A} \pm (0.5\% + 3)$ @ $1\text{ }\mu\text{A}$, • $60\text{ mA} \pm (0.5\% + 3)$ @ 0.01 mA, • $600\text{ mA} \pm (0.8\% + 3)$ @ 0.1 mA, • $10\text{ A} \pm (1.2\% + 3)$ @ 0.01 A

AC current measurement:	• 600 μA @ 0.1 μA : $\pm (1.0\% + 5)$ @ 40 Hz ... 10 kHz $\pm (2.0\% + 5)$ @ 10 kHz ... 15 kHz • 6000 μA @ 1 μA : $\pm (1.0\% + 5)$ @ 40 Hz ... 10 kHz $\pm (2.0\% + 5)$ @ 10 kHz ... 15 kHz • 60 mA @ 0.01 mA : $\pm (1.0\% + 5)$ @ 40 Hz ... 10 kHz $\pm (2.0\% + 5)$ @ 10 kHz ... 15 kHz • 600 mA @ 0.1 mA : $\pm (1.0\% + 5)$ @ 40 Hz ... 10 kHz $\pm (3.0\% + 5)$ @ 1 kHz ... 10 kHz • 10 A @ 0.01 A : $\pm (2.0\% + 6)$ @ 40 Hz ... 5 kHz
Resistance measurement:	• 600 $\Omega \pm (0.8\% + 3)$ + test leads resistance @ 0.1 Ω, • 6 k$\Omega \pm (0.5\% + 2)$ @ 0.001 kΩ, • 60 k$\Omega \pm (0.5\% + 2)$ @ 0.01 kΩ, • 600 k$\Omega \pm (0.5\% + 2)$ @ 0.1 kΩ, • 6 M$\Omega \pm (0.8\% + 2)$ @ 0.001 MΩ, • 60 M$\Omega \pm (1.2\% + 3)$ @ 0.01 MΩ
Capacitance measurement:	• 6 nF $\pm (2.5\% + 5)$ @ 0.001 nF, • 60 nF $\pm (2.5\% + 5)$ @ 0.01 nF, • 600 nF $\pm (2.0\% + 5)$ @ 0.1 nF, • 6 μF $\pm (2.0\% + 5)$ @ 0.001 μF, • 60 μF $\pm (2.0\% + 5)$ @ 0.01 μF, • 600 μF $\pm (3.0\% + 4)$ @ 0.1 μF, • 6 mF $\pm (5.0\% + 4)$ @ 0.001 mF
Inductance measurement:	—
Frequency measurement:	• 6 kHz $\pm (0.1\% + 3)$ @ 0.001 kHz, • 60 kHz $\pm (0.1\% + 3)$ @ 0.01 kHz, • 600 kHz $\pm (0.1\% + 3)$ @ 0.1 kHz, • 6 MHz $\pm (0.1\% + 3)$ @ 0.001 MHz, • 60 MHz $\pm (0.1\% + 3)$ @ 0.01 MHz,
Temperature measurement:	• $^{\circ}\text{C}$: -40 $^{\circ}\text{C}$... 0 $^{\circ}\text{C} \pm (8.0\% + 5)$ @ 1 $^{\circ}\text{C}$, 0 $^{\circ}\text{C}$... 400 $^{\circ}\text{C} \pm (1.0\% + 3)$ @ 1 $^{\circ}\text{C}$, 400 $^{\circ}\text{C}$... 1000 $^{\circ}\text{C} \pm (1.5\% + 3)$ @ 1 $^{\circ}\text{C}$, • $^{\circ}\text{F}$: -40 $^{\circ}\text{F}$... 32 $^{\circ}\text{F} \pm (8.0\% + 5)$ @ 1 $^{\circ}\text{F}$, 32 $^{\circ}\text{F}$... 752 $^{\circ}\text{F} \pm (1.5\% + 5)$ @ 1 $^{\circ}\text{F}$, 752 $^{\circ}\text{F}$... 1832 $^{\circ}\text{F} \pm (2.5\% + 5)$ @ 1 $^{\circ}\text{C}$
Automatic change of measuring ranges:	—
hFE:	✓
Diode test:	✓
Sound signal of the continuity test:	✓
Checking TTL logic states:	—
RS-232:	—
USB:	—
Main features:	• Large, readable LCD display with backlight • Possibility to measure alternating voltage taking into account the constant component (measurement function AC+DC) • Hold - stopping the meter reading • Aesthetic and solid construction
Power supply:	• 6 x 1.5V, type R14/LR14 battery (not included), • 220 V AC
Weight:	1.88 kg



Dimensions:	306 x 243 x 107 mm
Manufacturer / Brand:	UNI-T
Guarantee:	2 years

PRESENTATION

Front panel:




Rear view:





Place for batteries 6 x 1.5V R14/LR14:

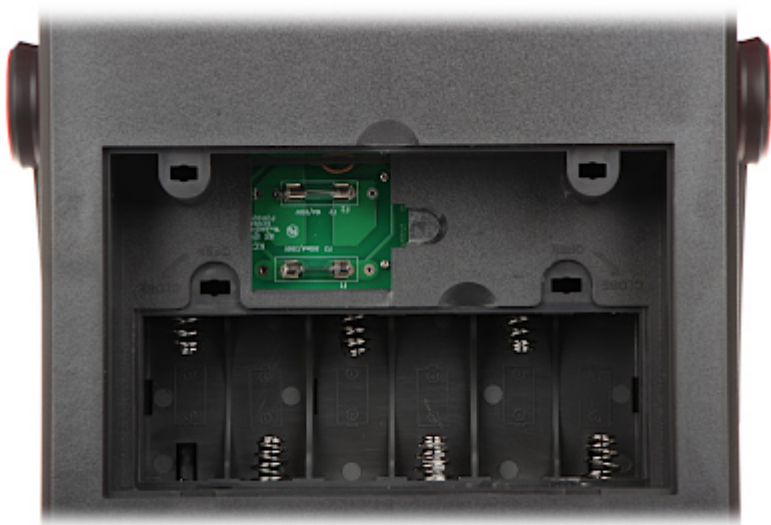

Included, among others measuring adapter:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------