

Code: DY-2810/IS-B

INVERTER POWER GENERATOR **DY-2810/IS-B** 2500 W Dynamo

Net: **494.01 EUR** Gross: **494.01 EUR**



The use of technology with the use of an inverter allows to obtain a stable output voltage that allows for safe powering of electronic receivers.

The inverter generator is used for emergency power supply, e.g. computers, server rooms, telephones, central heating furnace controllers, digitally controlled household equipment, heat pumps, electrically opened gates and garage gates, various medical devices and other devices sensitive to voltage fluctuations. It is also a convenient power supply in the field of tourism, e.g. caravans, camper-vans, boats, etc.

The genset engine's rubber stabilizers and engine mounts dampen vibrations and minimize noise.

SPECIFICATION

Nominal power:	2500 W
Maximum power:	2800 W
Output voltage:	230 V AC
Number of outlets:	1 pcs - single-phase
Built-in voltmeter:	✓
Output frequency:	50 Hz
Voltage stabilization:	Inverter (provides full voltage stabilization)
Frequency measurement in Hz:	✓
Measuring the number of engine hours:	✓
12V DC output:	✓
Alternator windings:	Copper
Engine capacity:	120 cm ³
Engine type:	1 cylinder, 4 stroke, gasoline, air cooled
Starting the engine:	Manual
Noise level during operation:	≤ 75 dBA
Fuel tank capacity:	6 l
Fuel gauge:	✓

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Main features:	<ul style="list-style-type: none"> • Low oil level indicator light • Overload signaling • Overload protection • Display of operating parameters : voltage, frequency, engine hours since the engine was last started, total engine hours • 2 x USB socket • Save fuel by automatically reducing the revs as the load decreases
Color:	Yellow + Black
Weight:	20.6 kg
Dimensions:	520 x 290 x 460 mm
Manufacturer / Brand:	Dynamo
Guarantee:	2 years

PRESENTATION


Front panel:





Air filter:



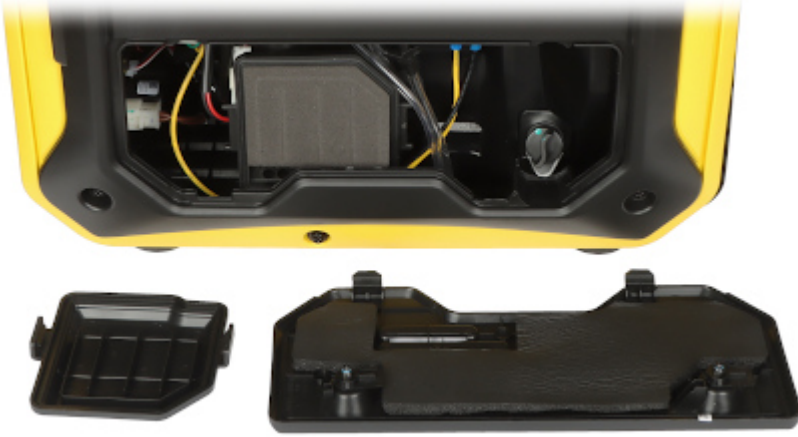

Oil filler:



Spark plug access:





Muffler:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



The engine is started manually with a recoil starter:



Throttle body and choke switch:



Fuel filler and fuel gauge:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Both the weight and size of the device make its transport very easy:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60