

Code: BCS-L-TIP55FCR3L3-AI1-G(2)

IP CAMERA **BCS-L-TIP55FCR3L3-AI1-G(2)** NightColor - 5 Mpx 2.8 mm BCS Line

Net: **1 775.00 PLN** Gross: **1 775.00 PLN**

Camera equipped with NightColor technology, which allows you to obtain a clear color image even at night and has the function of active audio-visual deterrence in combination with AI artificial intelligence functions.

In the night mode, the camera uses an IR illuminator, and when there is movement in the monitored area, it switches to the color mode with a white light illuminator for detailed recording of key events. The NightColor series camera allows to obtain clear, colorful image even in very poor lighting conditions. Active intrusion deterrence works by blinking blue and red light and siren sound or voice prompts.

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install. Camera is according to IP67 Index of Protection norm.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.7 " Progressive Scan CMOS
Matrix size:	5 Mpx
Resolution:	2960 x 1668 - 5 Mpx , 2880 x 1620 - 4.7 Mpx , 2688 x 1520 - 4 Mpx , 2560 x 1440 - 3.7 Mpx , 2048 x 1536 - 3 Mpx , 2304 x 1296 - 3 Mpx , 1920 x 1080 - 1080p , 1280 x 960 - 1.3 Mpx , 1280 x 720 - 720p
Lens:	2.8 mm F1.0
View angle:	<ul style="list-style-type: none">• 97 ° (manufacturer data)• 105 ° (our tests result)
Range of IR illumination:	≤ 30 m
White light LED illuminator range:	≤ 30 m
Min. illumination:	0.003 Lux / F1.0, 30IRE (color)
Image compression method:	H.265+ / H.265 / H.264+ / H.264 / H.264H / H.264B / MJPEG
Memory card slot:	Micro SD memory cards up to 256GB support (possible local recording)
RS-485 interface:	—
Alarm inputs / outputs:	1 / 1

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Audio:	<ul style="list-style-type: none"> • Microphone built-in - 2 pcs, • Speaker built-in, • Audio input, • Audio output, • Bi-directional audio streaming support, • Audio detection
Main stream frame rate:	25 fps @ 5 Mpx
Network interface:	10/100 Base-T (RJ-45)
WEB Server:	Built-in
Max. number of on-line users:	20
ONVIF:	✓
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Free application BCS Manager • iOS (iPhone): Free application BCS Manager
Default IP address:	192.168.1.108
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Main features:	<ul style="list-style-type: none"> • Active deterrence function, Alternately flashing LEDs: red and blue - frequency configuration, Siren sound - 3 volume levels • WDR - 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • ROI - improve the quality of selected parts of image • F-DNR (Defog) - Reduction of image noise caused by precipitation • Quick Pick - AI technology enabling, together with the recorder, quick identification of interesting objects (people/vehicles) based on an artificial intelligence algorithm. It allows to extract and compare the colors of clothes and vehicles • SMD 4.0 - searching for an object classified as: human, motor vehicle - increased detection distance and resistance to false alarms • BLC/HLC - Back Light / High Light Compensation • Day/night mode • Full Color - colorful night mode • Auto White Balance • AGC - Automatic Gain Control • Motion Detection - max. 4 zones • Privacy zones - max. 8 • Mirror - Mirror image • Light and sound alarm • White light (LED) illuminator built-in : 2 LEDs • IVS analysis : crossing the line (tripwire), intrusion - classification of people and vehicles, scene changing, video tampering, Audio detection
Housing:	Compact - Metal
Color:	Dark graphite
"Index of Protection":	IP67
Vandal-proof:	—
Power supply:	<ul style="list-style-type: none"> • PoE (802.3af), • 12 V DC / 920 mA
Power consumption:	<ul style="list-style-type: none"> • ≤ 8.2 W @ PoE • ≤ 6.8 W @ 12 V
Operation temp:	-40 °C ... 60 °C



Weight:	1.02 kg
Dimensions:	289 x 95 x 85 mm
Supported languages:	Polish, English
Manufacturer / Brand:	BCS Line
Guarantee:	2 years

PRESENTATION



Side view:



Bottom view:



Memory card slot and "Reset" button:



Camera mounting side view:



Camera connectors:



Connectors description:



In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Camera image at night conditions with internal built-in LED illuminator on:



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

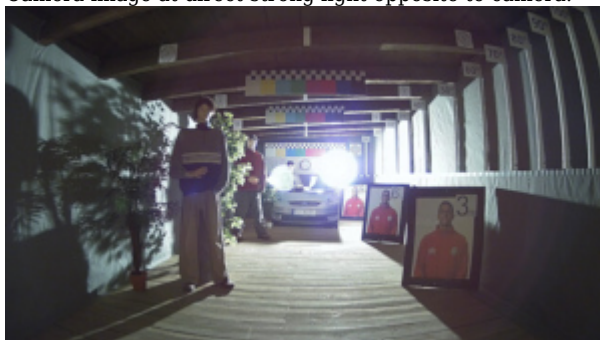

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------