

Code: APTI-W31S2

PTZ OUTDOOR IP CAMERA **APTI-W31S2** LongPlus Wi-Fi - 3 Mpx 3.6 mm

Net: **135.20 PLN** Gross: **135.20 PLN**

The cameras cooperating with the user-friendly LongPlus platform have been designed with special care to simplify the configuration process and enable the user to create a simple and effective monitoring system.

Very easy operation via mobile devices (Android / iOS), allows the users for comfortable and remote operation, and also management of the camera. The used Wi-Fi module allows to remote communication with camera for max. distance up to 100 m. Camera is according to IP65 Index of Protection norm.

In addition, the camera has the function of active deterrence of intruders using a motion-activated white light LED spotlight and siren sound.

Attention! Devices cooperating with the LongPlus platform do not have a WEB interface. The camera works only with the mobile application (the camera does not work with recorders).



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.9 " Progressive Scan CMOS
Matrix size:	3 Mpx
Resolution:	2304 x 1296 - 3 Mpx
Lens:	3.6 mm
View angle:	79 °
Range of IR illumination:	30 m
Horizontal rotation range:	0 ° ... 355 ° - Rotation of the head is limited by stops
Vertical rotation range:	0 ° ... 90 °
Audio:	<ul style="list-style-type: none">• Microphone built-in,• Speaker built-in,• Audio transmission via network,• Bi-directional audio streaming support
Image compression method:	H.265
Main stream frame rate:	20 fps @ 3 Mpx
Network protocols:	TCP/IP, UDP, DHCP, NTP
Network interface:	<ul style="list-style-type: none">• Ethernet : 100 Mbps• Wi-Fi IEEE 802.11 b/g/n
ONVIF:	—

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

WEB Server:	—
Mobile phones support:	Access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Free application LongPlus • iOS (iPhone): Free application LongPlus
Default admin user / password:	admin / admin The administrator password should be set at the first start
Default IP address:	DHCP
Web browser access ports:	—
PC client access ports:	—
Mobile client access ports:	—
Port ONVIF:	—
RTSP URL:	—
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
Main features:	<ul style="list-style-type: none"> • Wi-Fi Module - IEEE 802.11 b/g/n, Range : 100 m (open area) • Motion Detection • LED Floodlight • RESET button
Power supply:	12 V DC / 1 A (power adapter included)
Power consumption:	< 6 W
Housing:	Mini Speed Dome, Plastic
"Index of Protection":	IP65
Weight:	0.5 kg
Dimensions:	<ul style="list-style-type: none"> • Ø 112 x 166 mm (camera) • 122 x 171 x 305 mm (with holder and antennas)
Supported languages:	English
Manufacturer / Brand:	APTI
Guarantee:	2 years

PRESENTATION

Front view:






Memory card slot:



Mounting side view:



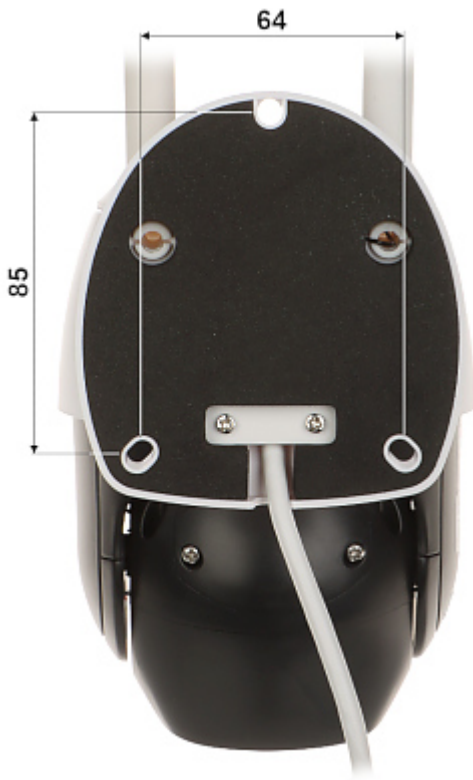

Camera connectors:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60