

Code: ATLO-CW1-TUYA

# SMART CONTROLLER FOR ROLLER SHUTTERS **ATLO-CW1-TUYA** Wi-Fi, Tuya Smart

Net: **9.03 EUR** Gross: **9.03 EUR**

The ATLO-CW1-TUYA controller enables remote control of the roller shutters with setting a desired stop position. For proper functioning of the device, it is necessary to connect it to the Wi-Fi network with Internet access.

Beyond direct control, the device has the ability to program the opening and closing schedule and linking to different system events. It is possible to create action scenarios with other devices. Voice control allows you to control the device via voice commands from Amazon Alexa or the Google Assistant (Internet access required).

Tuya is an international home automation platform that connects thousands of products made by different manufacturers. The system can support all the most popular communication protocols such as Wi-Fi, Zigbee, Bluetooth.

**Attention!** Controlling the device and schedule settings is possible if the device has access to the Internet.




## SPECIFICATION

|                            |   |
|----------------------------|---|
| Application:               | roller shutters, roof windows, awnings, drop-down screens, curtains   |
| Power supply:              | 100 ... 240 V AC, 50 / 60 Hz  |
| Maximal total load:        | 720 W   |
| Total maximal current:     | 3 A   |
| Number of inputs:          | 2   |
| Number of outputs:         | 2   |
| Connector type:            | screw terminals   |
| Wireless:                  | Wi-Fi, 2.4 GHz - IEEE 802.11 b/g/n  |
| Radio communication range: | < 100 m (open area)   |
| Mobile phones support:     | <ul style="list-style-type: none"><li>• The <a href="#">Tuya Smart</a> free application on Android</li><li>• The <a href="#">Tuya Smart</a> free application on iOS</li></ul>   |
| Main features:             | <ul style="list-style-type: none"><li>• Local control by physical button,</li><li>• Możliwość użycia przycisku monostabilnego i bistabilnego,</li><li>• schedule,</li><li>• timer,</li><li>• Setting scenarios by different events,</li><li>• remote access,</li><li>• voice control</li><li>• Saving in the memory of the last adjustment of the position (from a button or application)</li></ul> |
| Housing:                   | Plastic   |
| "Index of Protection":     | IP20  |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

|                 |                  |
|-----------------|------------------|
| Color:          | White            |
| Operation temp: | -10 °C ... 40 °C |
| Weight:         | 0.036 kg         |
| Dimensions:     | 43 x 39 x 22 mm  |
| Guarantee:      | 2 years          |

## PRESENTATION

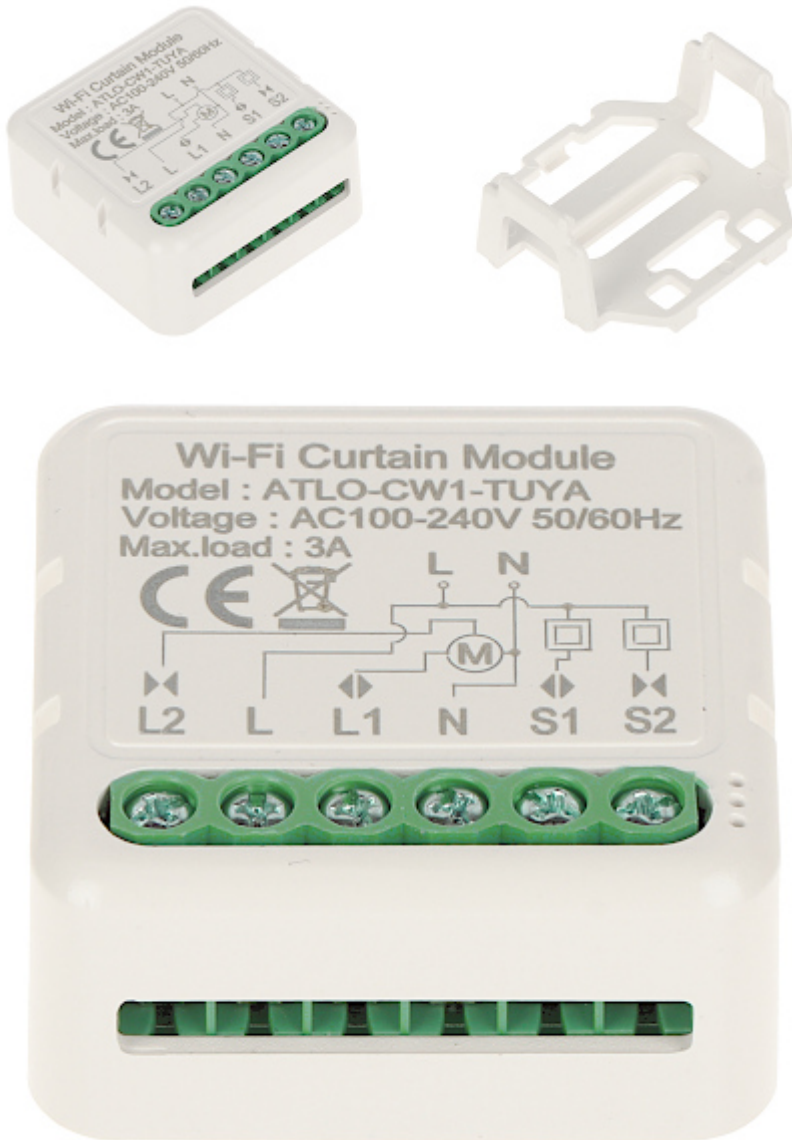



**PACKAGE**

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|

