

Code: OR-PI-456/230AC

RELAY **OR-PI-456/230AC** ORNO

Net: **22.02 EUR** Gross: **22.02 EUR**

It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.



SPECIFICATION

Number of relay outputs:	1
Power supply:	230 V AC
Current consumption:	30 mA @ 230 V AC
Relay maximal load:	16 A / 250 V AC (max) 16 A / 24 V DC (max)
Output:	1 x NO/NC
Main features:	<ul style="list-style-type: none">• DIN, TS-35 rail mounting• LED indication• Bistable operation controlled by the S control input
Operation temp:	-20 °C ... 50 °C
Weight:	0.07 kg
Dimensions:	97 x 17 x 65 mm
Manufacturer / Brand:	ORNO
Guarantee:	2 years


PRESENTATION

Front view:


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Side view:

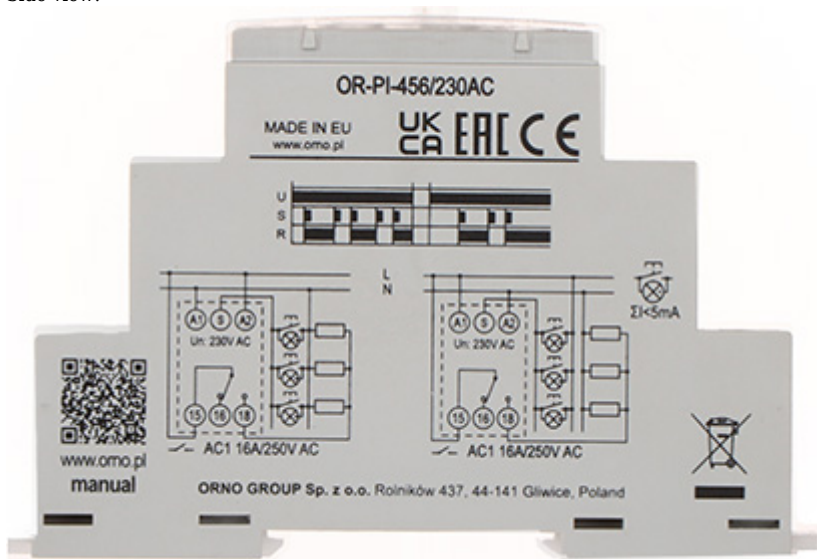

Mounting side view:

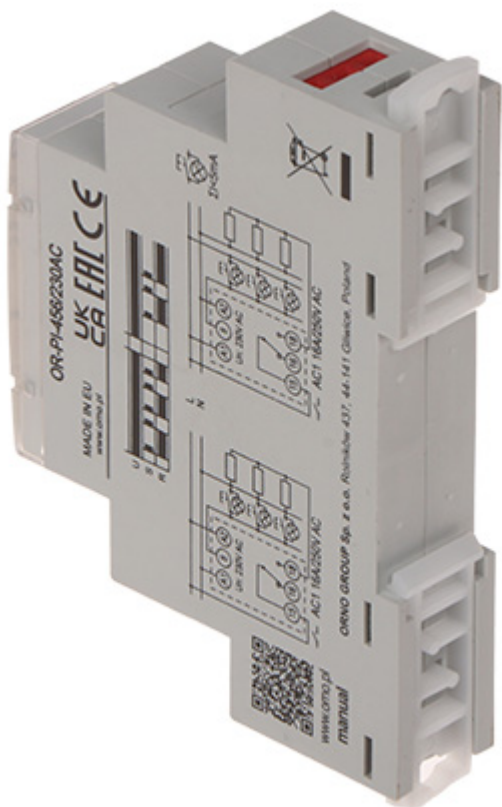

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------