

Code: KMC-20-40

MODULAR CONTACTOR **KMC-20-40** 20 A 400 V AC IDEAL

Net: **14.24 EUR** Gross: **14.24 EUR**

The KMC-20-40 contactor has 4 NO contacts. Both control and power supply voltage uses alternating current. The device has no manipulator for manual operation.

The KMC-20-40 device is designed to mount on DIN TH-35 rail.



SPECIFICATION

Device type:	Contactor - NO, Three-phase
Nominal load current:	<ul style="list-style-type: none">• 20 A @ AC7A / AC1,• 7 A @ AC7B
Rated load voltage:	400 V AC
Nominal power voltage:	230 V AC
Nominal power:	<ul style="list-style-type: none">• 13000 W @ 400 V AC7A• 3500 W @ 400 V AC7B
Number of NO/NC contacts:	4 / 0
Category of use:	AC1, AC7A, AC7B
Connectors type:	screw terminals
Main features:	<ul style="list-style-type: none">• Operation temp : -25 °C ... 40 °C• Supported norms : PN-EN 60947-4-1, PN/EN 61095
Housing:	Plastic, DIN, TH-35 rail mounting
"Index of Protection":	IP20
Width in 17.5 mm modules:	2
Weight:	0.21 kg
Dimensions:	67 x 82 x 36.2 mm
Manufacturer / Brand:	IDEAL
Guarantee:	5 years

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

PRESENTATION

Front view:



Side view:



Mounting side view:






Side view:



Mounting side view:



Dimensions:

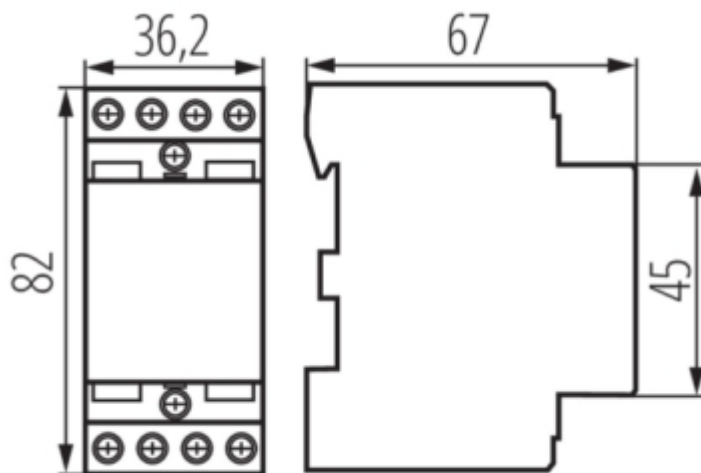

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

