

Code: DS-PDBG8-EG2

# ACOUSTIC GLASS BREAK DETECTOR **DS-PDBG8-EG2** Hikvision

Net: 120.00 PLN Gross: 120.00 PLN



Sensor signals an alarm on registering a low-frequency tone (impact sound), followed by a high-frequency tone (sound of broken glass). The sensor starts to analyze a high-frequency channel after receiving the low-frequency sound wave, caused by the impact.

## SPECIFICATION

Detection:	Glass break detector
Range:	max. 8 m
Detection angle:	120 °
Environment class:	II
Sensitivity adjustment:	✓
Alarm signaling:	<ul style="list-style-type: none"><li>• LED diodes :<ul style="list-style-type: none"><li>- Red - high frequency trigger</li><li>- Green - low frequency trigger</li><li>- Blue - Alarm signaling,</li></ul></li><li>• Signal to control panel</li></ul>
Alarm output:	NC
Power supply:	9 ... 16 V DC / 25 mA @ 12 V (max)
Main features:	<ul style="list-style-type: none"><li>• detection of breaking plate, laminated or tempered glass</li><li>• Glass thickness : 2.4 mm ... 6.4 mm</li><li>• Glass size : 0.3 m x 0.3 m ... 3 m x 3 m</li><li>• Digital detector</li><li>• trimmer sensitivity adjustment</li><li>• Tamper detection - opening the enclosure</li></ul>
Color:	White
Operation temp:	-10 °C ... 55 °C
Weight:	0.05 kg
Dimensions:	23 x 107 x 39 mm

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Manufacturer / Brand:	Hikvision
SAP Code:	314300154
Guarantee:	2 years


## PRESENTATION

Front view:



Internal view of the housing:



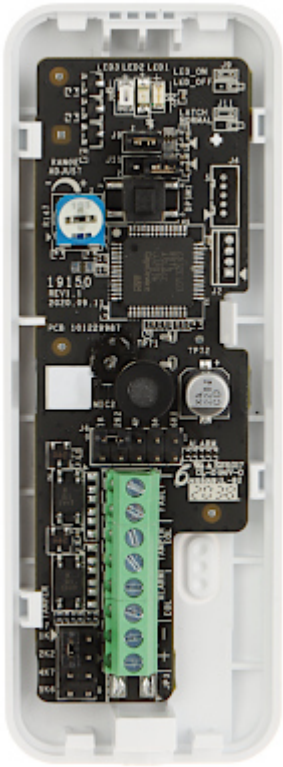

Mounting side view:



In the kit:



**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

