

Code: MS-9733PL

MULTISWITCH UNICABLE I/II **MS-9733PL** 5 INPUTS / 5 OUTPUTS + 1 UNICABLE OUTPUT JOHANSSON

Net: **287.71 PLN** Gross: **287.71 PLN**

The MS-9733PL UniCable, SCR Multiswitch is used to expand the classical multiswitch installation to UniCable technology.

The device has 5 inputs and 5 outputs, it can be installed between Quattro / Wideband LNB and a standard multiswitch. The MS-9733PL Multiswitch has an active satellite line, so it can be connected in cascade to the next UniCable Multiswitches and the classical multiswitch without any signal loss. In addition, there is also 1 DVB-T input and 1 DVB-T output for terrestrial TV signal.

PL version. List of channels compatible with the receivers of Cyfrowy Polsat.



SPECIFICATION

Inputs:	4 x 290 MHz ... 2340 MHz , 1 x 5 MHz ... 862 MHz DVB-T
---------	---



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Outputs:	<p>4 x 950 MHz ... 2150 MHz , 1 x 5 MHz ... 862 MHz DVB-T , 1 x UNICABLE</p> <p>UNICABLE I (EN 50494)</p> <ul style="list-style-type: none"> • 1210 MHz CH1 • 1420 MHz CH2 • 1680 MHz CH3 • 2040 MHz CH4 • 978 MHz CH5 • 1028 MHz CH6 • 1072 MHz CH7 • 1116 MHz CH8 <p>UNICABLE II (EN 50607)</p> <ul style="list-style-type: none"> • 1210 MHz CH1 • 1420 MHz CH2 • 1680 MHz CH3 • 2040 MHz CH4 • 978 MHz CH5 • 1028 MHz CH6 • 1072 MHz CH7 • 1116 MHz CH8 • 1160 MHz CH9 • 1271 MHz CH10 • 1315 MHz CH11 • 1359 MHz CH12 • 1484 MHz CH13 • 1528 MHz CH14 • 1572 MHz CH15 • 1616 MHz CH16 • 2084 MHz CH17 • 2128 MHz CH18 • 1816 MHz CH19 • 1860 MHz CH20 • 1904 MHz CH21 • 1948 MHz CH22 • 1992 MHz CH23 • 1728 MHz CH24 • 1772 MHz CH25
Switching signals:	<p>13 V / 18 V , 0 Hz / 22 kHz , DiSEqC 1.0 , DiSEqC 2.0 , 16 dCSS/dSCR UBs</p>
SAT Tap loss:	0 dB AGC
SAT Gain control:	AGC
Maximal output level SAT:	85 dB μ V
TV Tap loss:	-7 dB
Maximal output level TV:	85 dB μ V
Insertion loss:	<ul style="list-style-type: none"> • 2.0 dB SAT • 2.5 dB TV
Pre-amplifiers powering:	✓
DC-transition:	✓
Power supply:	<p>SAT RECEIVER Inputs VL/VH Power adapter 20 V / 3 A (not included)</p>
Current consumption:	max. 320 mA @ 13 V DC
Dimensions:	92 x 90 x 40 mm
Weight:	0.13 kg
Manufacturer / Brand:	JOHANSSON
Guarantee:	2 years

PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Top view:

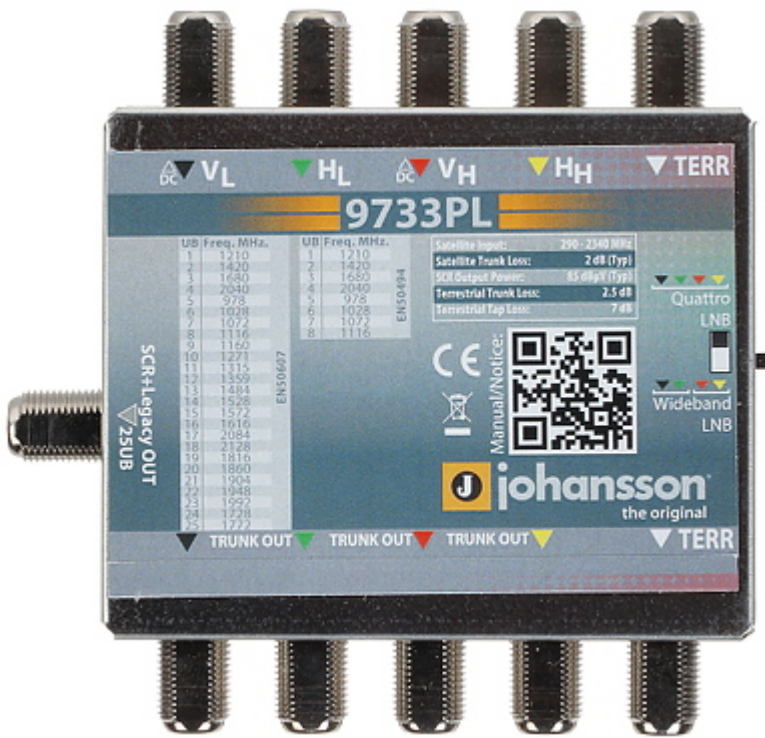


Connectors view:





In the kit:

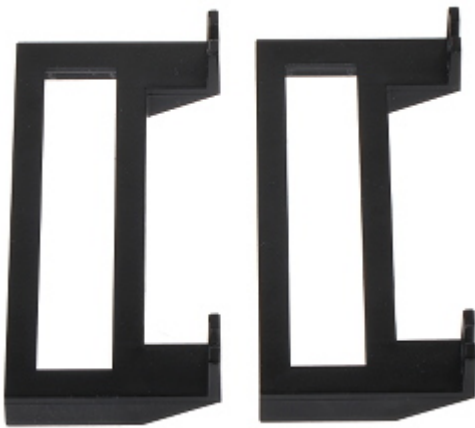

OUR OPINIONS



- o PL version. List of channels compatible with the receivers of Cyfrowy Polsat.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------