


Code: TRISET-PLUS

COAXIAL CABLE **TRISSET-PLUS** Dca LSZH A+

Net: 2.75 PLN Gross: 2.75 PLN

The TRISET-PLUS high-quality coaxial cable dedicated to both individual and collective installations. Cable made in LSZH (LS0H) - halogen-free insulation, used where greater safety in the event of fire is required (high-rise residential buildings, public utility buildings).



SPECIFICATION

In section:	100 m . Price for 1m when buying a whole roll
Coaxial cable:	TRISSET
Inner conductor:	Ø 1.13 mm Cu Wire
Dielectric:	Ø 4.8 mm (physical foam)
Shield:	• Foil : Al/PET/SY - Internal • Foil : Al/PET - External
Braid:	81 % Al wire
Outer coating:	Ø 6.85 mm PVC LSZH, Dca-s2, d1, a1
Coating color:	White
Minimal bend radius:	70 mm
Impedance:	75 Ω
Capacity:	52 pF/m
Resistance of the inner conductor for DC current:	16.85 Ω/km
Dielectric resistance:	2500 MΩ/km
Screening efficiency:	> 95 dB @30 ... 1000 MHz
Shortening wave coefficient:	84 %
Weight:	41.4 kg/km
Main features:	• low attenuation • perfect matched • high screening efficiency • fire reaction class in accordance with CPR - Dca-s2, d1, a1 • LSZH (LS0H) - halogen-free insulation
Guarantee:	2 years


PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Transfer impedance of TRiset-PLUS in 5-30 MHz range and the requirements for A+ class:

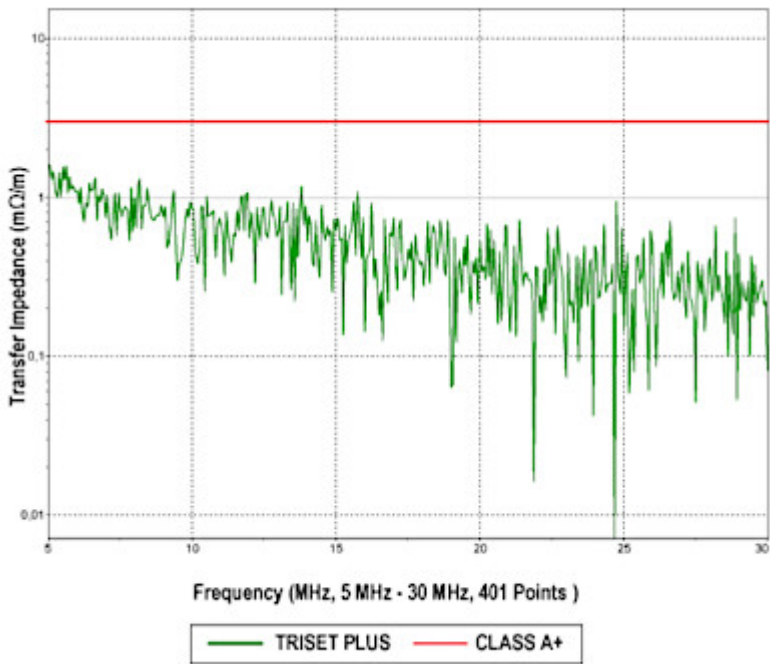

Insertion loss in the 5-2400 MHz frequency range:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------