

Code: VGA-1920F

CONVERTER TO COMPUTER MONITORS **VGA-1920F**

Net: **104.00 PLN** Gross: **104.00 PLN**

The VGA-1920F device converts Composite Video signal or S-Video signal to VGA signal.

It supports the VGA output resolutions up to 1920x1200 with aspect ratios: 4:3, 16:9 and 16:10.



SPECIFICATION

Input:	<ul style="list-style-type: none">• Video composite (BNC socket),• S-VIDEO,• VGA (bypass)
Input signal possible standards:	<ul style="list-style-type: none">• PAL, NTSC,• VGA (bypass)
Output:	VGA (bypass)
Supported resolutions:	<ul style="list-style-type: none">• 4:3800 x 600 @ 60/75 Hz1024 x 768 @ 60 Hz1280 x 1024 @ 60 Hz1600 x 1200 @ 60 Hz• 16:9 / 16:101280 x 720 @ 60 Hz1366 x 768 @ 60 Hz1440 x 900 @ 60 Hz1680 x 1050 @ 60 Hz1920 x 1080 @ 60 Hz1920 x 1200 @ 60 Hz
OSD menu:	✓
Possible settings:	<ul style="list-style-type: none">• brightness, contrast, saturation, hue - the settings are saved after power off• PIP - Picture In Picture
Power supply:	5 V / 1 A (power adapter included)
Weight:	0.07 kg
Dimensions:	100 x 65 x 26 mm
Guarantee:	2 years

PRESENTATION

Control keys:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Device connectors:



Example of device using:

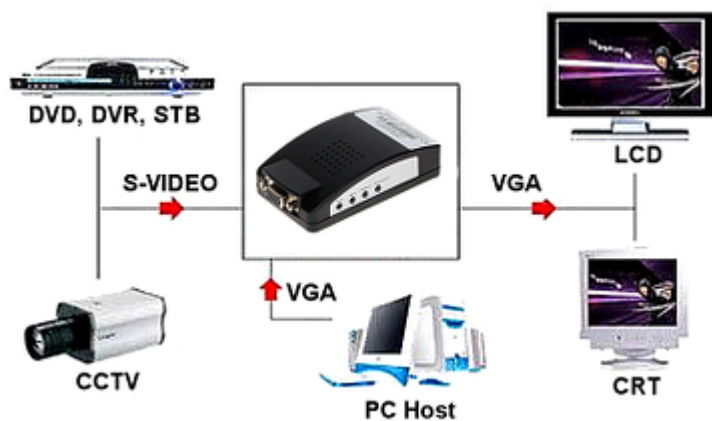

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------