

Code: C134-2812

## PAL CAMERA **C134-2812** 1000 TVL 2.8 ... 12 mm

Net: **268.00 PLN** Gross: **268.00 PLN**

The C134-2812 camera is equipped with very high resolution CMOS sensor. The built-in vari-focal lens allows to set very wide range of camera view angles. Very high resolution of the camera sensor ensures more detailed image than standard CCTV camera. Due to above, this camera is perfect solution for surveillance systems requiring persons or vehicles recognition, for example at places like: buildings entrance, lobbies, lounges, etc.

Integrated camera bracket has a regulation in all three planes and enables turn the camera to any direction. It also allows to mount camera to the ceiling. Cables are hidden inside bracket, it protects against cutting them and improves the aesthetics of installation.

OSD menu controller is placed on the cable. It allows to easily set or change the parameters and functions of the camera without move or unmount it.



### SPECIFICATION

Standard:	PAL
Sensor:	1/3 " Sony CMOS
Matrix size:	1.3 Mpx
Resolution:	1000 TVL
Lens:	2.8 ... 12 mm
View angle:	81 ° ... 23 ° (manufacturer data) 85 ° ... 28 ° (our tests result)
Range of IR illumination:	40 m
S/N ratio:	52 dB
Video output:	1 Vpp / 75 Ω
Power supply:	12 V / 480 mA
Main features:	<ul style="list-style-type: none"><li>• ICR - Movable InfraRed filter</li><li>• DNR - Digital Noise Reduction</li><li>• WDR - Wide Dynamic Range</li><li>• Mirror - Mirror image</li><li>• Motion Detection - max. 4 zones</li><li>• Privacy zones - max. 8</li><li>• Sharpness - sharper image outlines</li><li>• Configurable: brightness, contrast, saturation</li><li>• Auto White Balance</li></ul>
OSD menu:	✓
Housing:	Metal
Color:	Dark graphite
"Index of Protection":	IP66
Operation temp:	-10 °C ... 50 °C
Weight:	0.85 kg
Dimensions:	220 x 92 x 92 mm

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Guarantee:

2 years

## PRESENTATION

Front view:



Bottom view:




Mounting side view:



Mounting dimensions:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

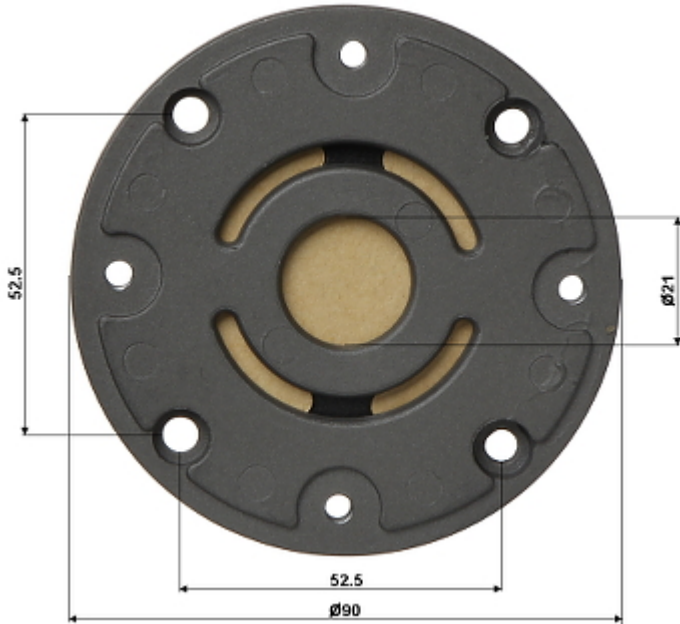

In the kit:



## OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Camera image at direct strong light opposite to camera:



## OUR OPINIONS



- o Very good solution for camera lens focal and focus adjustment.

## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------