

Code: ULT-8MM-UNI

## FIBER OPTIC CABLE **ULT-8MM-UNI**

Net: **4.91 PLN** Gross: **4.91 PLN**



The ULT-8MM-UNI is an universal fiber optic cable for indoor and outdoor applications.

The multimode fibers meet the international standard ISO/IEC 11801, PN-EN 50173.

### SPECIFICATION

Fiber type:	Multi-mode, OM3
Number of fibers:	8 pcs
Cable diameter:	6 mm
Cable weight:	45 kg / 1000 m
Buffer diameter:	250 µm
Maximum pulling force:	2000 N - (dynamic)
Crush resistance:	1000 N
Minimal bend radius:	60 mm
Main features:	<ul style="list-style-type: none"><li>• rodent protected</li><li>• the LSZH (or LSOH) jacket - zero halogen, flame retardant and low smoke</li><li>• gel-filled central tube</li><li>• reinforced by aramid yarn</li><li>• UV radiation resistance</li><li>• Class CPR: Eca</li></ul>
Application:	<ul style="list-style-type: none"><li>• due to the small size and flexibility, the cables are ideal for installation in cable ducts</li><li>• it is used in modern FTTH and FTTB systems, in server rooms, between buildings installations</li><li>• universal fiber optic cables intended for horizontal connections in buildings and outside buildings in secondary sewage system</li></ul>
Operation temp:	-20 °C ... 70 °C
Installation temperature:	-20 °C ... 70 °C


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Guarantee:

2 years

## PRESENTATION

Cross-section of a cable:

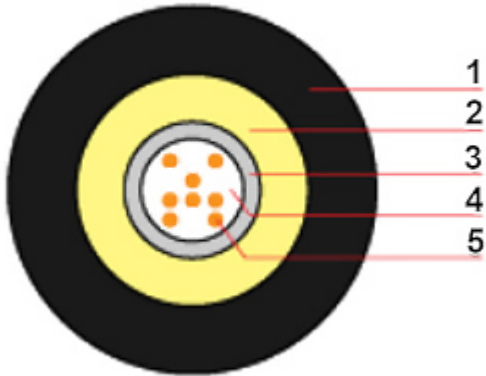

- 1) LSZH jacket (sheath)
- 2) Aramid yarn
- 3) Central tube
- 4) Gel filled tube
- 5) Optical fiber in 250  $\mu\text{m}$  buffer coating

## PACKAGE

Dimensions (L x W x H): 0x0x0 mm

Gross Weight: 0 kg



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60