

Code: ZS40W

CODE LOCK **ZS40W** VIDOS

Net: **22.26 EUR** Gross: **22.26 EUR**



Indoor, autonomous code lock with RFID reader.

Autonomous operation of the device allows the user to:

- Open by using a card or PIN code.
- Remember stored cards or PIN codes.
- Signaling left the door open.
- Acoustic and optical signaling.

Administrator capabilities are following:

- Programming by using the keypad.
- Adding a new card by using the keypad.
- Adding a new card and entering a PIN code.
- Changing the PIN code of the user.
- Deleting the PIN code of the user.
- Setting the lock release time.
- Restoring the default settings.

SPECIFICATION

Cards support:	Unique EM 125kHz
Reading distance of prox-keys:	3 ... 6 cm
Autonomous operation:	✓
Keyboard built-in:	✓
Communication:	Wiegand 26
Doorbell button:	—
Tamper output:	—
Power supply:	12 V DC $\pm$ 10%
Maximal current consumption:	25 mA (Standby mode) 60 mA (operation)
Relay contacts load:	1 A / 12 V
Main features:	• Number of relay outputs : 1, • 2000 indexed users, • Identification: Card and/or PIN • Blue backlight of the keys • Support for door contact and exit button • Electric strikes and electromagnetic locks support • Reversing bolt support • Tamper protection (detection of removing from mounting surface and enclosure opening) • Alarm output • NO/NC output
Operation temp:	-20 °C ... 50 °C

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Permissible relative humidity:	10 ... 90 % (non-condensing)
"Index of Protection":	IP40
Housing:	Plastic (ABS)
Color:	White
Weight:	0.09 kg
Dimensions:	82 x 92 x 21 mm
Manufacturer / Brand:	VIDOS
Guarantee:	3 years


PRESENTATION

Front panel:



Internal view of the housing:




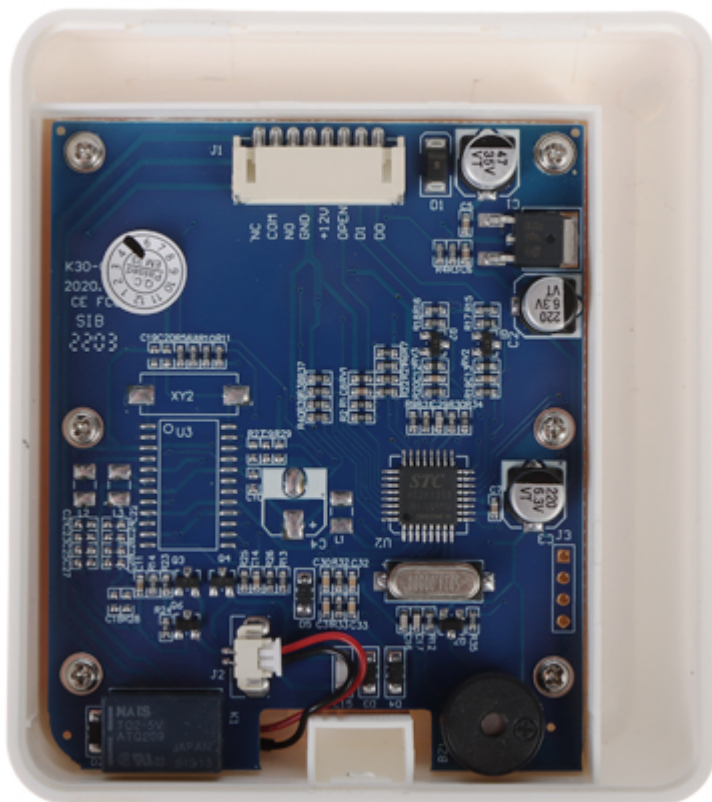


Rear view:



Connectors description:

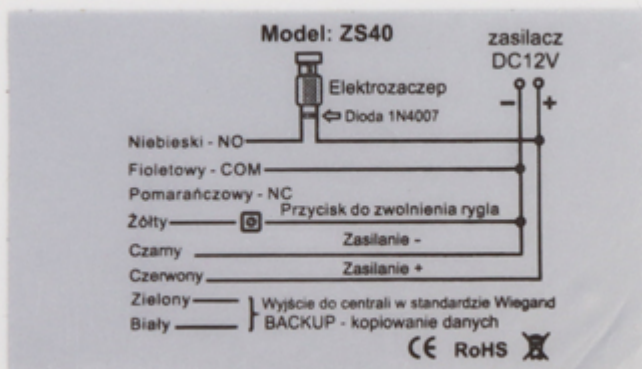

In the kit:

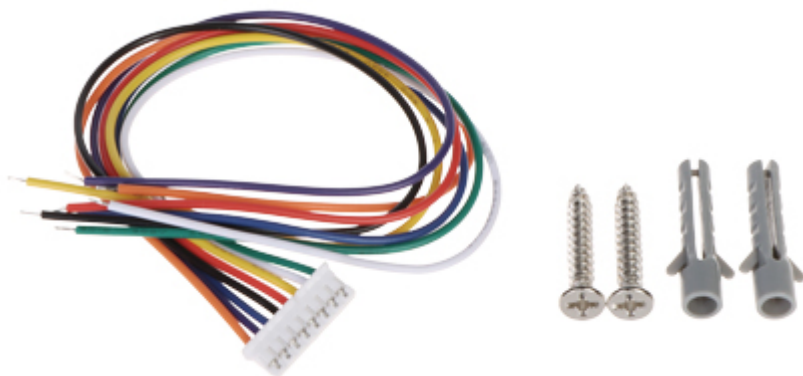

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------