

Code: AD-NL-6253BLR4

LED FLOODLIGHT WITH MOTION SENSOR AD-NL-6253BLR4 ADVITI

Net: 13.60 EUR Gross: 13.60 EUR

Illuminator can be used indoors and outdoors. Incomparably greater lifetime of the LEDs compared to traditional halogen bulb provides cheap and reliable operation.

The built-in twilight sensor prevents the lamp from being turned on in daylight. The PIR detector allows you to automatically switch on the lighting only in the presence of people, which translates into both increased lifetime of LEDs and minimized electricity consumption.

The use of multiple LEDs provides a better heat dissipation, and the longer lifetime of the reflector and allows for uniform light output.

The device meets the IP44 tightness class.



SPECIFICATION

Luminous flux:	1600 lm
Light color:	Neutral, 4000 K
Twilight switch:	✓
Power supply:	230 V AC
Nominal power:	20 W
Power factor:	0.8
CRI:	> 80
Main features:	<ul style="list-style-type: none">• LED SMD diodes• LED lifetime 30 000 h• Solid workmanship• PIR detector - Built-in, Range : 4 ... 8 m, Detection angle : 120 °• PIR detection sensitivity adjustment,• Sensitivity adjustment of the twilight sensor : 10 ... 2000 lx,• Lighting time adjustment : 10 ... 600 s,• IK rating : IK04
Housing:	Aluminum
"Index of Protection":	IP44
Operation temp:	-20 °C ... 50 °C
Weight:	0.27 kg
Dimensions:	120 x 140 x 65 mm
Manufacturer / Brand:	ORNO / ADVITI

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Guarantee:

3 years

PRESENTATION

Front view:




Rear view:




Potentiometers to adjust the lighting time, PIR detector sensitivity and twilight sensor sensitivity:



Internal view of the housing:

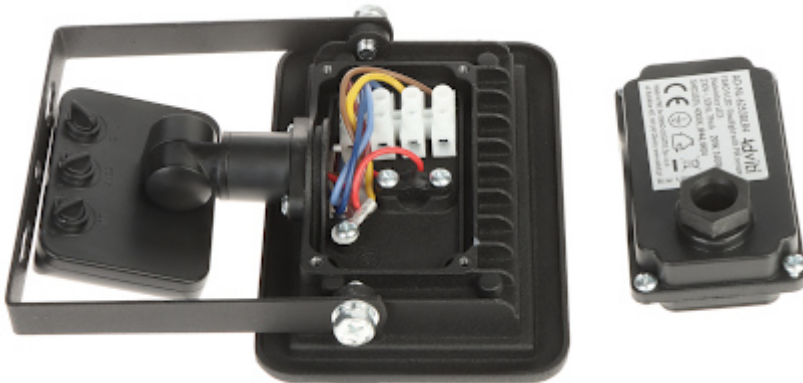

Device connectors:

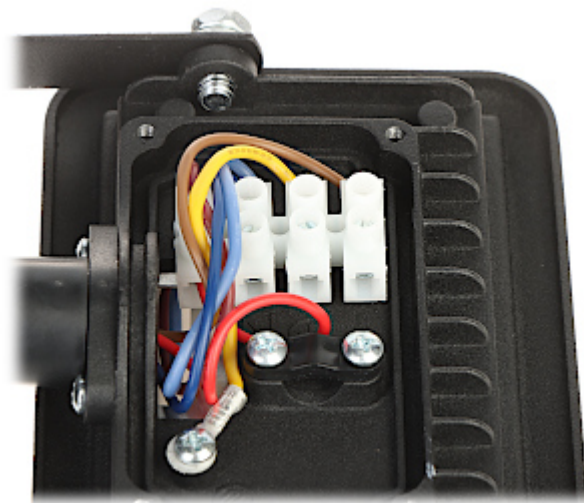

PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

