

Code: SF-4

SATELLITE METER SF-4

Net: 42.16 EUR Gross: 42.16 EUR

The SF-4 satellite meter allows to quick set the satellite dish signal. The SF-4 is equipped with readable menu, which helps to operate for each installer. The device has implemented a few satellite positions (satellites + transponders).

The SF-4 model allows to DVB-S2 signals measurement.



SPECIFICATION

Output and input:	F socket
Frequency range:	950 MHz ... 2150 MHz
Signal level:	-65 ... -25 dBm
LNB power supply:	13/18 V, max. 500 mA
Switching between bandwidths:	22 kHz
DiSEqC:	1.0
Modulation:	QPSK, 8PSK
Symbol rate:	1 ... 45 Msps
Power supply:	• 10 x 1.5 V AA (Batteries) (not included) • 13 V / 18 V SAT RECEIVER • 13 V ... 18 V DC from power adapter (not included)
Display:	2.7 " LCD - with light indication
Main features:	• DVB-S / DVB-S2 signals measurement - SD and HD quality channels • Digital meter of signal level and quality (%) • Sound signaling • DiSEqC and 22kHz control support
Weight:	0.15 kg
Dimensions:	154 x 78 x 29 mm
Guarantee:	2 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Side view:



Rear view:



In the kit:

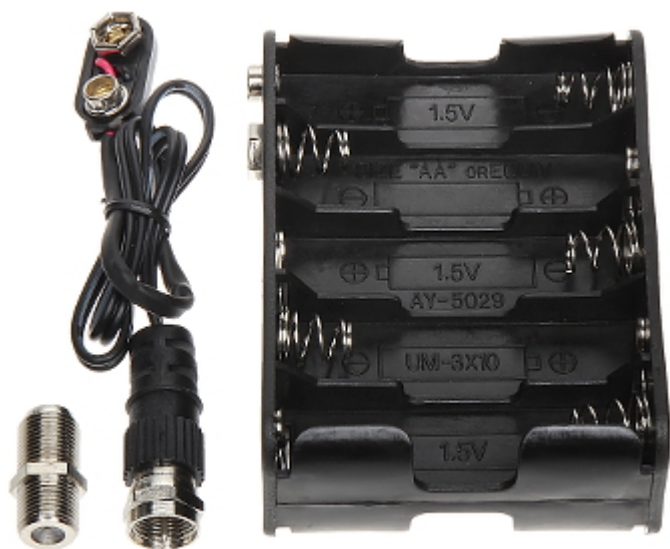

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------