

Code: VTX-2

TRANSMITTER 2.4 GHz **VTX-2** 4 CHANNELS

Net: 146.25 PLN Gross: 146.25 PLN

The VTX-2 device is a low power transmitter, which is designed to direct work with CCTV cameras. It enables radio transmission of the audio and video signals. The device can use one of the four channels on 2400 MHz band. The channel selection is adjustable by board jumper. The VTX-2 transmitter is designed to operate with VRX-1 and VRX-2 receivers. It can be used outdoors, but under a roof. Due to connectors the case boxes are classified as splash-proof.



SPECIFICATION


Frequency range:	2.400 ... 2.4835 GHz
Number of channels:	4
Modulation:	FM (CCIR 405)
Transmitter power:	< 10 mW
Video signal level:	1 Vpp / 75 Ω
Audio signal level:	1 Vpp / 1.5 k Ω
Impedance:	50 Ω
Power supply:	11 - 14 V 150 mA
Operation temp:	-25 °C ... +70 °C
Dimensions:	90 x 80 x 45 mm
Guarantee:	2 years

PRESENTATION

Internal view of the device:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

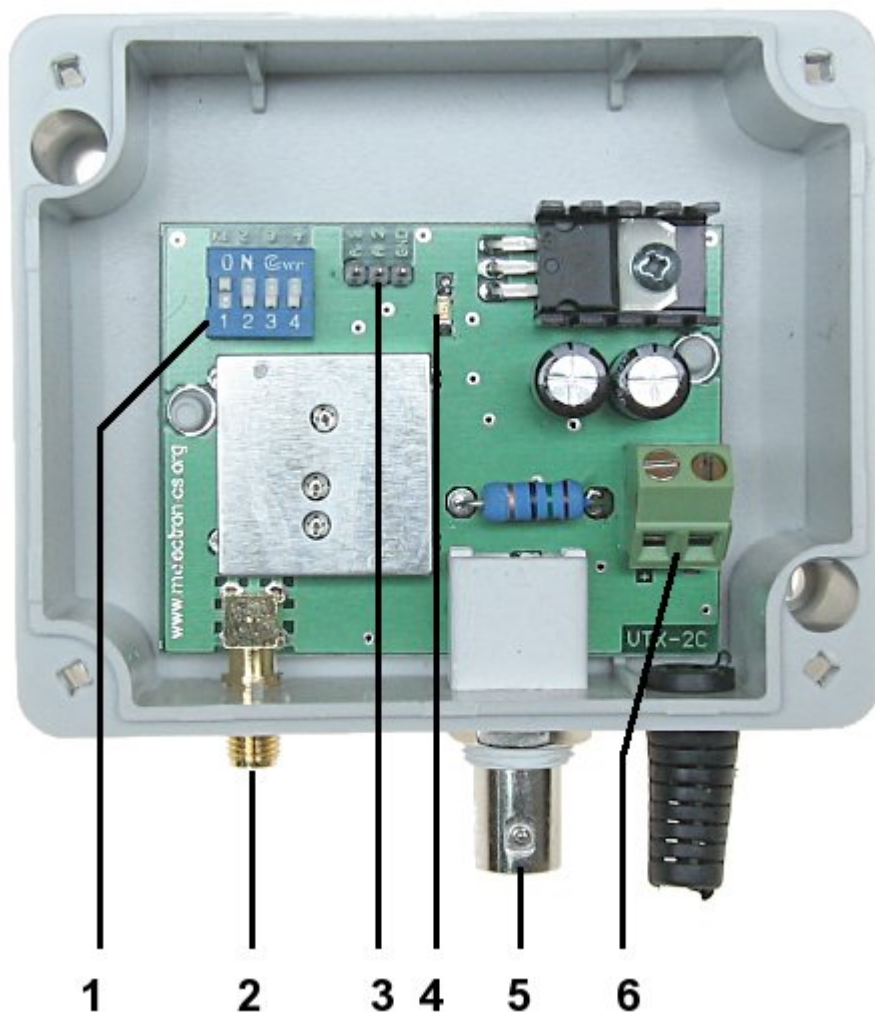

- 1) Channel selection switches (only one of the switches can be set to ON position)
- 2) Antenna input - SMA-RP type
- 3) Audio signals connector (GND, A1, A2)
- 4) Power LED indicator
- 5) VIDEO input - BNC type
- 6) Power supply +12V DC (terminals)

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------