

Code: CDV65-2812

## VANDALPROOF CAMERA **CDV65-2812** 650 TVL 2.8 ... 12 mm

Net: **47.71 EUR** Gross: **47.71 EUR**

Vandal-proof camera equipped with high resolution Sony Super HAD II sensor.

Camera Dome cover is protected by metal cable against falling during installation works. Housing construction allows to mount the camera to the ceiling and the wall (image is right oriented in both cases).



### SPECIFICATION

Standard:	PAL
Sensor:	1/3 " Sony Super HAD II CCD
Resolution:	650 TVL
Lens:	2.8 ... 12 mm
Min. illumination:	0.001 Lux
View angle:	81 ° ... 23 ° (manufacturer data) 86 ° ... 30 ° (our tests result)
Video output:	1 Vpp / 75 Ω
S/N ratio:	> 52 dB
Vandal-proof:	✓
Housing:	Metal
Color:	White
Main features:	<ul style="list-style-type: none"><li>• WDR - Wide Dynamic Range</li><li>• DNR - Digital Noise Reduction</li><li>• BLC - configurable Back Light Compensation</li><li>• HLC - High Light Compensation (spot)</li><li>• Day/Night mode - configurable</li><li>• Motion Detection - max. 4 configurable zones</li><li>• Configurable Privacy Zones</li><li>• Mirror - Mirror image</li><li>• Sharpness - sharper image outlines</li></ul>
OSD menu:	✓
"Index of Protection":	IP65
Power supply:	12 V / 90 mA
Operation temp:	-10 °C ... 50 °C
Weight:	0.47 kg
Dimensions:	Ø 120 x 93 mm

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Guarantee:


2 years

## PRESENTATION

View after remove the dome cover - adjustable lens and OSD menu control joystick visible:



Mounting side view:

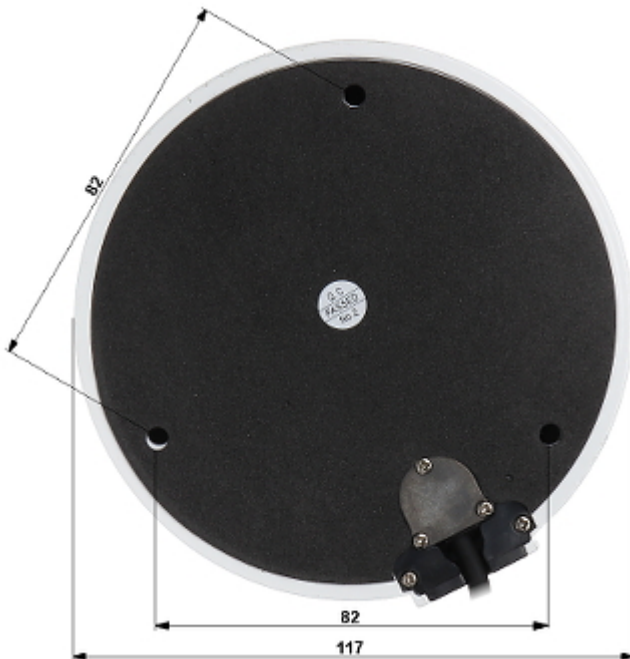

In the kit:



## OUR TESTS

Camera image at artificial illumination (about 30Lux):



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



Camera image at direct strong light opposite to camera:



Camera image at night conditions, at different illumination values show below:

1 LUX:



0.1 LUX:



0.01 LUX:



## OUR OPINIONS



- Camera sensitivity parameter is lower than value declared by the manufacturer.

## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------