

Code: GEMINI-62BB-13W

IP CAMERA **GEMINI-62BB-13W** - 1080p 3.7 mm

Net: **365.00 PLN** Gross: **365.00 PLN**

IP camera with efficient H.264 image compression algorithm for clear and smooth video streaming at maximal resolution of 1080p (2.1 MPx). Very easy operation by Internet Explorer browser allows the users to convenient and remote support, and also remote management of the camera. Included camera software enables management and integrated monitoring of many network cameras. Its using allows to create large surveillance system.

ICR - The movable IR filter allows to perfect colors reproduction in daylight and wide gray-scale with high sharpness of the image at night mode. Camera bracket allows to adjust the camera to any direction, and power cables are hidden inside the bracket.



SPECIFICATION


Standard:	TCP/IP
Sensor:	1/2.9 " Sony EXMOR CMOS
Digital Image Processor:	Hisilicon 3516
Matrix size:	2.43 Mpx
Resolution:	1920x1080 - 1080p 1280x720 - 720p 720x576
Lens:	3.7 mm
View angle:	72 °
S/N ratio:	50 dB
Range of IR illumination:	15 m
IR illuminator power adjustment:	Automatic
Compression:	H.264 MJPEG
Bitrate:	16 ... 8000 kbps
Main stream frame rate:	max. 25 fps - 1080p
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	TCP/IP, UDP, HTTP, DHCP, RTP/RTSP, DNS, DDNS, NTP, PPPOE, UPNP, SNMP, ONVIF
WEB Server:	Built-in
Max. number of on-line users:	10
ONVIF:	2.0 - port 8000
Audio:	—
Mobile phones support:	Available applications for mobile systems: iPhone, Android, Windows Mobile, Blackberry, Symbian Meye application - mobile port 5053
RS-485 interface:	—
Alarm inputs / outputs:	—

Main features:	• ICR - Movable InfraRed filter • Possibility to change the resolution, quality and bit rate • Motion Detection • Privacy zones • Configurable: brightness, contrast, saturation • Sharpness - sharper image outlines • Mirror - Mirror image • Day/night mode
Power supply:	12 V DC / 400 mA
Housing:	Metal
Color:	White
Supported languages:	English, Polish
"Index of Protection":	IP66
Operation temp:	-20 °C ... 60 °C
Weight:	0.41 kg
Dimensions:	Ø 65 x 166 mm
Guarantee:	2 years


PRESENTATION




Side view (the cable is hidden inside the bracket):

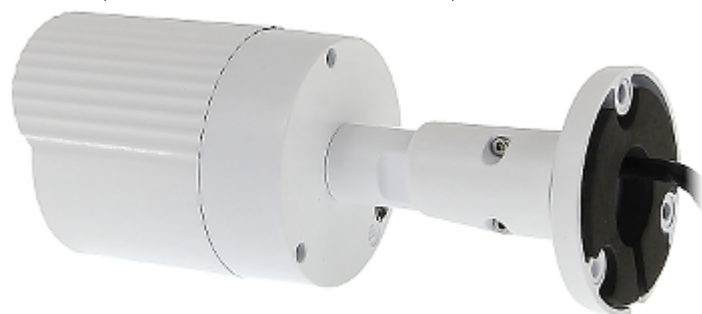

Bracket dimensions:

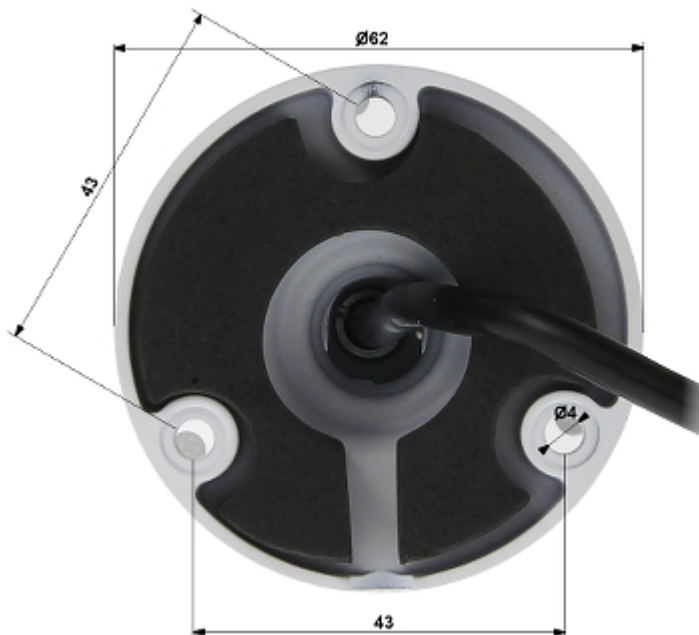

See how you can power the camera in PoE standard:

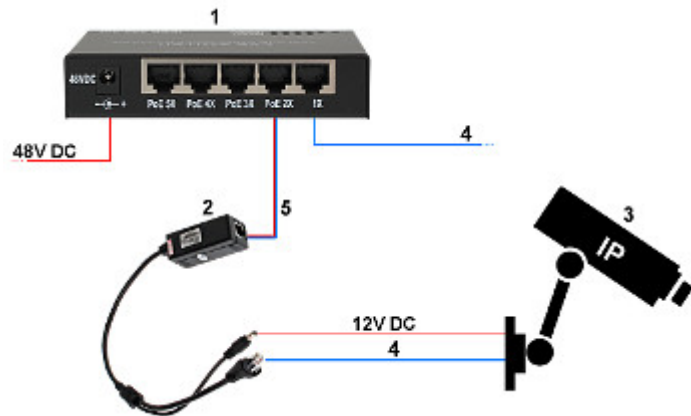

- 1. SWITCH PoE
 - 2. POE-802.3AF/C
 - 3. IP Camera
 - 4. Ethernet
 - 5. Ethernet + PoE
- In the kit:



OUR OPINIONS



- The DNR function reducing the image noise is not implemented in the camera.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

